



Input voltage range 36...75V DC
Single 80...100A output
1500V DC I/O electrical strength test voltage

Approvals: cRUus / CE (pending)

- High density design in industry standard $\frac{3}{4}$ brick size (2.4" x 3.45" x 0.5")
- 100°C base plate operation
- Highly efficient topology with synchronous rectifiers
- Output voltage trim range $\pm 10\%$
- ON/OFF control
- Remote sense
- Basic insulation rating

Selection Chart

Output U_o nom [V DC]	I_o nom [A]	Input voltage U_i [V DC]	Rated power $T_A = 60^\circ C$ ¹ P_o nom [W]	Type	Features
1.2	75	36...75	90 @ 200 Ifm	TXS75ZY	Sense, Trim
1.5	75	36...75	112 @ tbd Ifm	TXS75ZA	Enable or
1.8	75	36...75	135 @ 300 Ifm	TXS75ZB	Shut-down
2.5	80	36...75	200 @ tbd Ifm	TXS80ZD	
1.2	100	36...75	120 @ 300 Ifm	TXS100ZY	
1.5	100	36...75	150 @ tbd Ifm	TXS100ZA	
1.8	100	36...75	180 @ 400 Ifm	TXS100ZB	

¹ U_i nom $\pm 25\%$, $T_{Baseplate}=100^\circ C$, linear air flow, stand alone module

Purpose / Description

The TXS series is a 75 to 100 Amp, open frame, highly efficient, board mountable DC/DC converter. The low voltage – high amperage supplies the next generation of microprocessors, gate arrays and integrated circuits with reliable power. The TXS series features input undervoltage lockout, plus overload and overtemperature protection and its input-output voltage combination is ideally suited for Distributed Power Architectures (DPAs).

Input

Nominal input voltage	U_i nom	48 V DC
Input voltage range		36...75 V DC
Transient voltage withstand	survival	100V/100ms
Efficiency	U_i nom, I_o nom, $T_a=25^\circ C$	TXS75ZY, TXS100ZY typ. 87% TXS75ZA, TXS100ZA typ. 88% TXS75ZB, TXS100ZB typ. 89% TXS80ZD typ. 90%

Output

Output voltage setting accuracy	$U_{i\text{ nom}}, 50\% I_{o\text{ nom}}, T_c = 25^\circ\text{C}$	$\pm 1\% U_{o\text{ nom}}$
Minimum load		not required
Static line regulation	$U_{i\text{ min}} \dots U_{i\text{ max}}, 50\% I_{o\text{ nom}}$	$\pm 0.5\% U_{o\text{ nom}}$
Static load regulation	$U_{i\text{ nom}}, 10\dots 100\% I_{o\text{ nom}}$	$\pm 0.5\% U_{o\text{ nom}}$
Dynamic load regulation	$\Delta I_o = 25\text{A}, dI_o/dt = 2\text{A}/\mu\text{s}$	$\pm 10\% U_{o\text{ nom}}, 100\mu\text{s}$
Output voltage ripple and noise	$U_{i\text{ nom}}, I_{o\text{ nom}}, 20\text{ MHz bandwidth}$	TXS100ZY/TXS100ZA 50 mVpp TXS100ZB/TXS80ZD 100 mVpp
Start-up time	$U_{i\text{ nom}}, I_{o\text{ nom}}$	10ms

Protection

Input undervoltage lockout	Turn-on Turn-off	typ. 33V typ. 31V
Overload protection	hic-up (self recovery)	110\dots 130\% I_{o\text{ nom}}
OVP trip point	continuous limitation, no switch off	125\% U_{o\text{ nom}}
Overtemperature	shutdown with automatic restart (thermistor)	typ. 115^\circ\text{C}

Control

/SD, inverse shutdown input	TTL-compatible, unit disabled when active low (<1.5V)
Trim input for U_o	0.6V / 20k\Omega

Safety and EMC


Planned approvals	EN 60950, UL 1950, CSA 22.2 No. 950	
I/O insulation	EN60950, base plate floating	Basic
Electric strength test voltage	I/Case, I/O, O/Case	1.5 kV DC
Electrostatic discharge	IEC/EN 61000-4-2, level 3 (contact/air)	4/8 kV, criterion B
Electromagnetic field	IEC/EN 61000-4-3, level 2	3 V/m, criterion A
Electr. fast transients/burst	IEC/EN 61000-4-4, tbd.	tbd., criterion B
Electromagnetic emissions	CISPR 22/EN 55022, conducted (with external filter) CISPR 22/EN 55022, radiated (with external filter)	class B class B

Environmental specifications

Operating temperature T_{BP}	$U_{i\text{ nom}}, I_{o\text{ nom}}, \text{base plate temperature}$	-40\dots 100^\circ\text{C}
Storage temperature	non operational	-40\dots 100^\circ\text{C}
Damp heat	IEC/EN 60068-2-3, 93%, 40^\circ\text{C}	56 days
Shock	IEC/EN 60068-2-27, 11 ms	tbd g_n
Bump	IEC/EN 60068-2-29, 6 ms	tbd g_n
Sinusoidal vibration	IEC/EN 60068-2-6, 8.2\dots 58.1/58.1\dots 500 Hz	tbd g_n/tbd g_n
Random vibration	IEC/EN 60068-2-64, 10\dots 200/200\dots 2000 Hz	tbd/tbd g^2/Hz
MTBF	MIL-HDBK-217F Notice 2, G_B, 60^\circ\text{C}	1.1 Mio h

Mechanics

Print mountable industry standard $\frac{3}{4}$ brick (2.4 x 3.45 x 0.5 inch³)

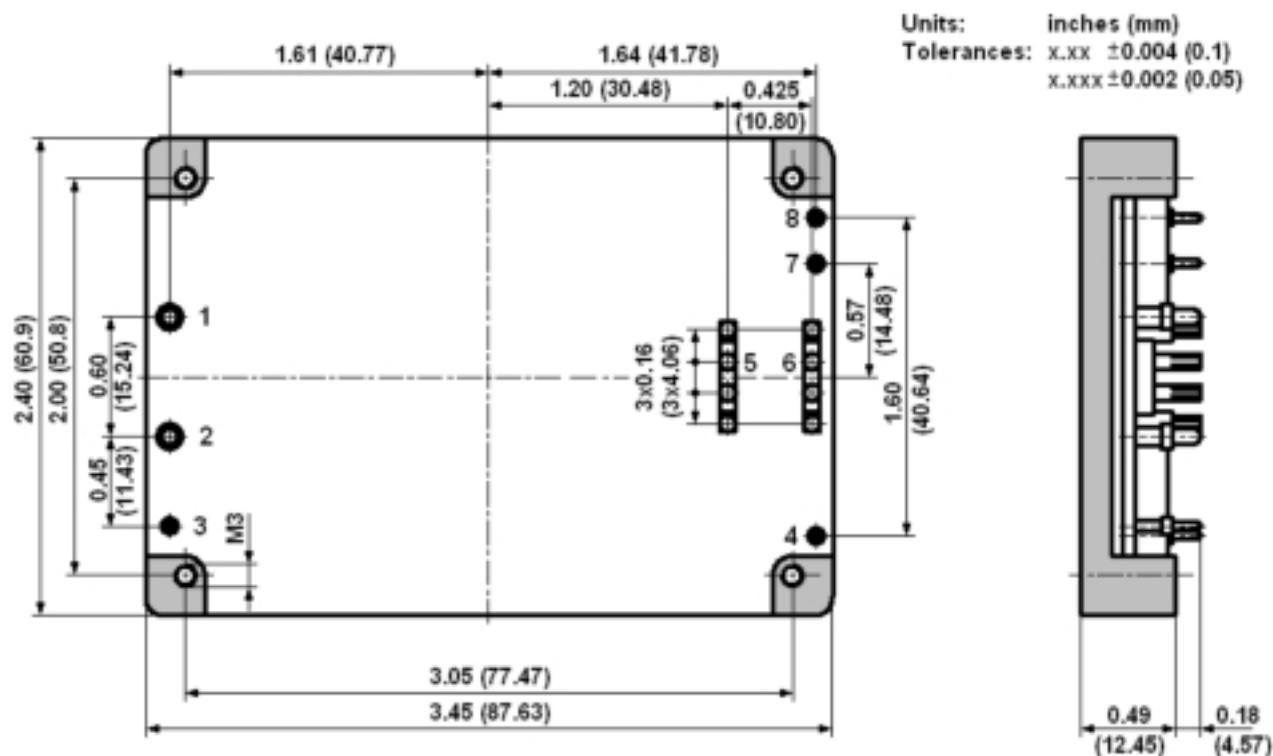

Pin	Function	inch (mm)
1	Vi-	0.08 ± 0.002
2	Vi+	(2.03 ± 0.05)
3	ON/OFF	0.04 ± 0.002
4	Sense+	(1.02 ± 0.05)
5	Vo-	4x 0.085 ± 0.002
6	Vo+	(4x 2.16 ± 0.05)
7	Trim	0.04 ± 0.002
8	Sense-	(1.02 ± 0.05)

Thermal Impedance (Baseplate to ambient)	
100 lfm	2.8 K/W
200 lfm	2.2 K/W
300 lfm	1.7 K/W
400 lfm	1.4 K/W
Note: Thermal impedance data is dependent on many environmental factors. The exact thermal performance should be validated for specific application. The figure is for a stand-alone module.	

Options / Accessories

Option / Accessory	Suffix	Remarks
Negative Logic (unit works when active low)	N	
0.24" (6.1mm) Pin Lengths	tbd	Contact factory
0.24" (6.1mm) Horizontal Heatsink	1H	Includes Thermal Pad
0.24" (6.1mm) Vertical Heatsink	1V	Includes Thermal Pad
0.45" (11.4mm) Horizontal Heatsink	2H	Includes Thermal Pad
0.45" (11.4mm) Vertical Heatsink	2V	Includes Thermal Pad
0.95" (24.1mm) Horizontal Heatsink	3H	Includes Thermal Pad
0.95" (24.1mm) Vertical Heatsink	3V	Includes Thermal Pad

Subject to change without notice.