

PQ1CG3032FZH

PQ1CG3032RZH

TO-220 Type Chopper Regulator

■ Features

1. Maximum switching current: 3.5A
2. Built-in ON/OFF control function
3. Built-in soft start function to suppress overshoot of output voltage in power on sequence or ON/OFF control sequence
4. Built-in oscillation circuit
(Oscillation frequency: TYP. 150kHz)
5. Built-in overheat, overcurrent protection functions
6. TO-220 package
7. Variable output voltage
(Output variable range: Vref to 35V/-Vref to -30V)
[Possible to select step-down output/inverting output according to external connection circuit]
8. PQ1CG3032FZH: Zigzag forming
9. PQ1CG3032RZH: Self-stand forming
9. RoHS directive compliant

■ Applications

1. Color TV
2. Digital OA equipment
3. Facsimiles, printers and OA equipment
4. Personal computers and amusement equipment

■ Absolute Maximum Ratings

(Ta=25°C)			
Parameter	Symbol	Rating	Unit
* ¹ Input voltage	V _{IN}	40	V
Error input voltage	V _{adj}	7	V
Input - output voltage	V _{i-o}	41	V
* ² Output - COM voltage	V _{OUT}	-1	V
* ³ ON/OFF control voltage	V _c	-0.3 to +40	V
Switching current	I _{sw}	3.5	A
* ⁴ Power dissipation	P _{D1}	1.4	W
	P _{D2}	14	
* ⁵ Junction temperature	T _j	150	°C
Operating temperature	T _{opr}	-20 to +80	°C
Storage temperature	T _{stg}	-40 to +150	°C
Soldering temperature	T _{sol}	260(10s)	°C

*1 Voltage between VIN terminal and COM terminal


*2 Voltage between VOUT terminal and COM terminal

*3 Voltage between ON/OFF control and COM terminal


*4 PD1:No heat sink,PD2:With infinite heat sink

*5 There is case that over heat protection function operates at the temperature T_j=125°C to 150°C, so this item cannot be used in this temperature range.

■ Outline Dimensions

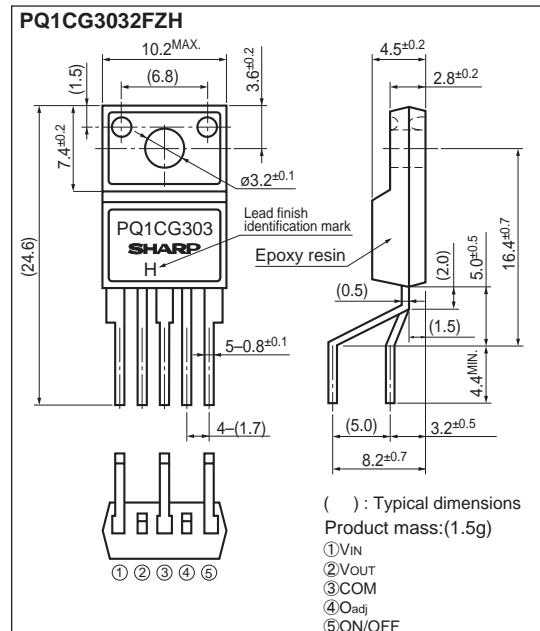

() : Typical dimensions
Product mass:(1.5g)
①V_{IN}
②V_{OUT}
③COM
④O_{adj}
⑤ON/OFF

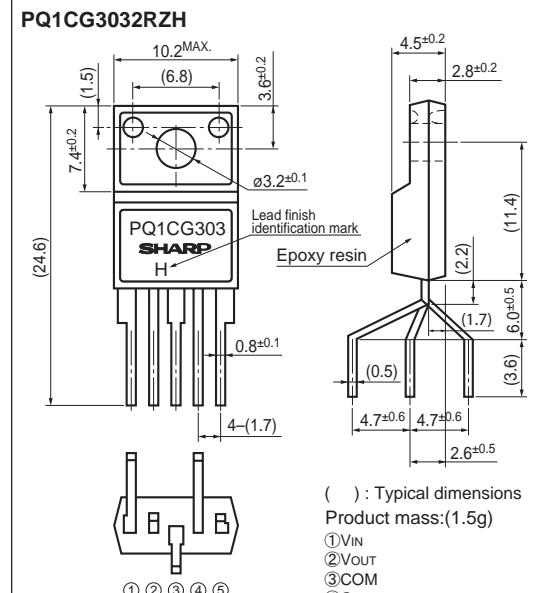

() : Typical dimensions
Product mass:(1.5g)
①V_{IN}
②V_{OUT}
③COM
④O_{adj}
⑤ON/OFF

Lead finish:Lead-free solder plating
(Composition: Sn2Cu)

Notice The content of data sheet is subject to change without prior notice.

In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.

■ Electrical Characteristics

(Unless otherwise specified, condition shall be $V_{IN}=12V$, $I_o=0.5A$, $V_o=5V$, ON-OFF terminals is open, $T_a=25^\circ C$)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Output saturation voltage	V_{SAT}	$I_{sw}=3A$	—	1.4	1.8	V
Reference voltage	V_{ref}	—	1.235	1.26	1.285	V
Reference voltage temperature fluctuation	ΔV_{ref}	$T_j=0$ to $125^\circ C$	—	± 0.5	—	%
Load regulation	$ RegL $	$I_o=0.5$ to $3A$	—	0.2	1.5	%
Line regulation	$ RegL $	$V_{IN}=8$ to $35V$	—	1	2.5	%
Efficiency	η	$I_o=3A$	—	80	—	%
Oscillation frequency	f_o	—	135	150	165	kHz
Oscillation frequency temperature fluctuation	Δf_o	$T_j=0$ to $125^\circ C$	—	± 2	—	%
Overshoot detecting level	I_L	—	3.6	4.7	5.8	A
Charge current	I_{CHG}	②,④ terminals is open, ⑤ terminal	—	-10	—	μA
Input threshold voltage	V_{THL}	Duty ratio=0%, ④ terminal=0V, ⑤ terminal	—	1.3	—	V
	V_{THH}	Duty ratio=100%, ④ terminal is open, ⑤ terminal	—	2.3	—	V
ON threshold voltage	V_{THON}	④ terminal=0V, ⑤ terminal	0.7	0.8	0.9	V
Stand-by current	I_{SD}	$V_{IN}=40V$, ⑤ terminal=0V	—	140	400	μA
Output OFF-state dissipation current	I_{QS}	$V_{IN}=40V$, ⑤ terminal =0.9V	—	8	16	mA

Fig.1 Test Circuit


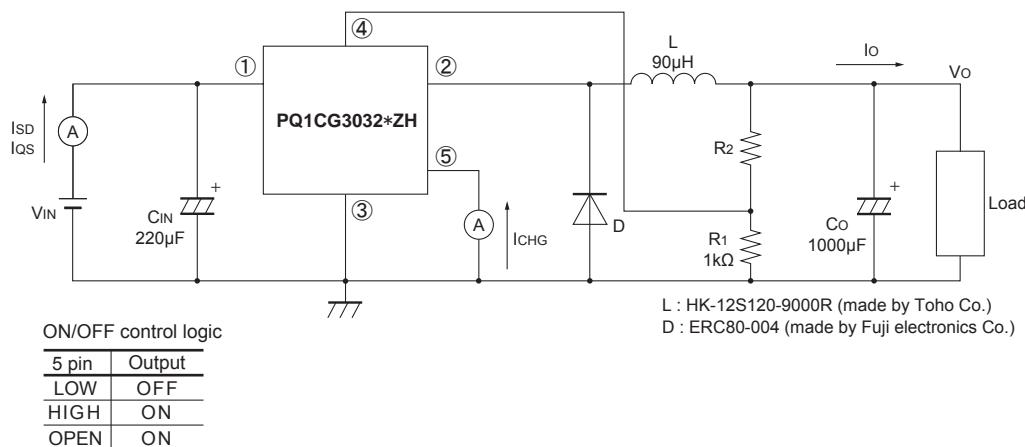


Fig.2 Power Dissipation vs.Ambient Temperature

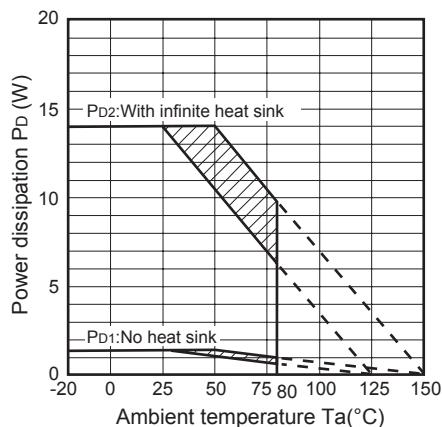

Note) Oblique line portion:Overheat protection may operate in this area

Fig.3 Overcurrent Protection Characteristics (Typical Value)

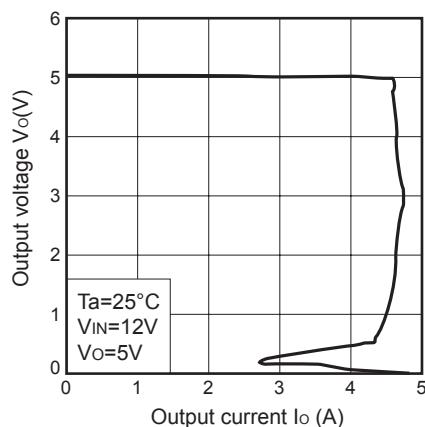


Fig.4 Efficiency vs. Input Voltage

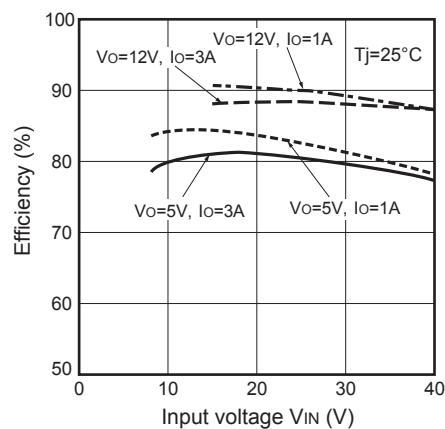


Fig.5 Output Saturation Voltage vs. Switching Current

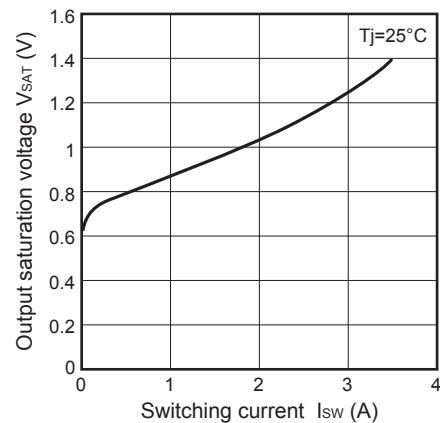


Fig.6 Stand-by Current vs. Input Voltage

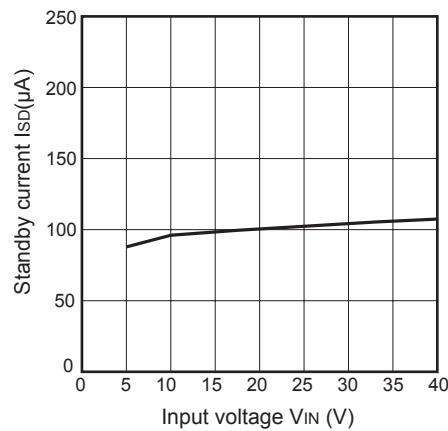


Fig.7 Reference Voltage Fluctuation vs. Junction Temperature

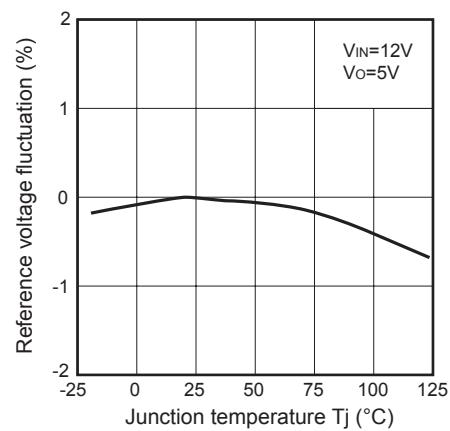


Fig.8 Load Regulation vs. Output Current

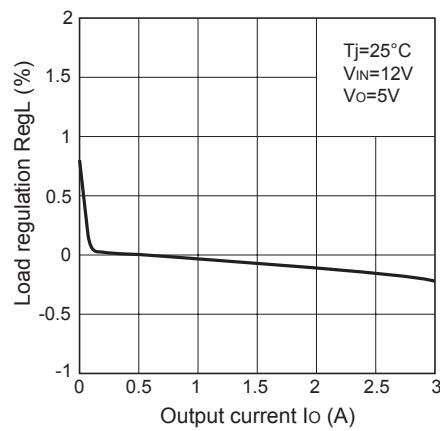


Fig.9 Line Regulation vs. Input Voltage

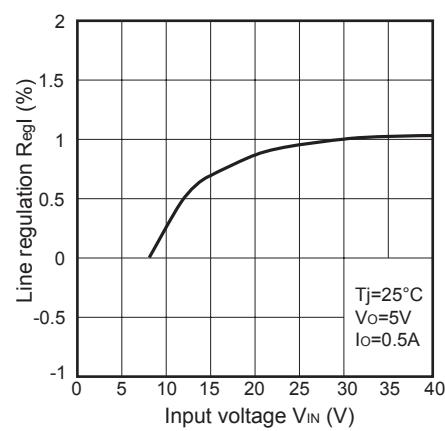


Fig.10 Oscillation Frequency Fluctuation vs. Junction Temperature

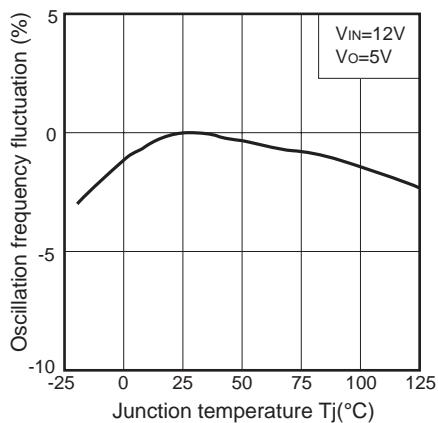


Fig.11 Overcurrent Detecting Level Fluctuation vs. Junction Temperature

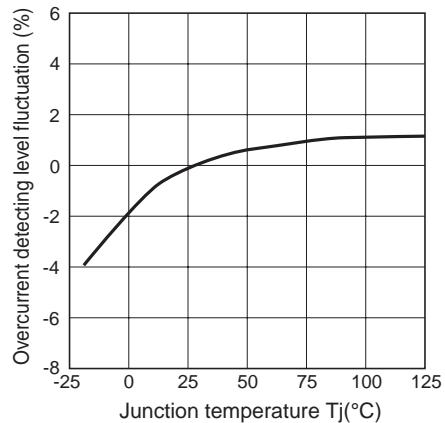


Fig.12 Threshold Voltage vs. Junction Temperature

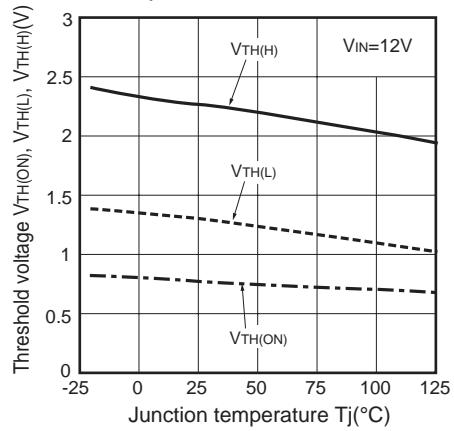


Fig.13 Operating Dissipation Current vs. Input Voltage

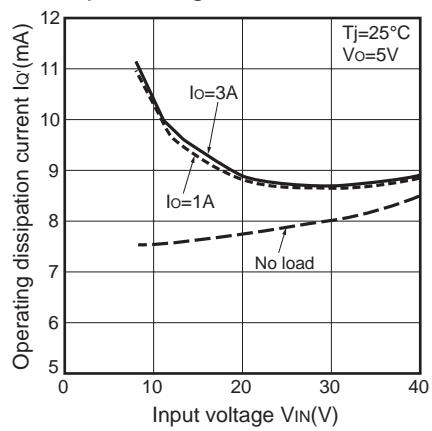


Fig.14 Block Diagram

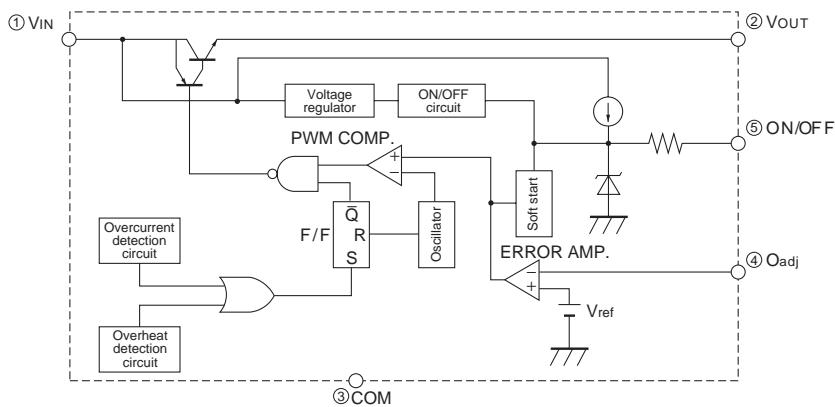


Fig.15 Step Down Type Circuit Diagram


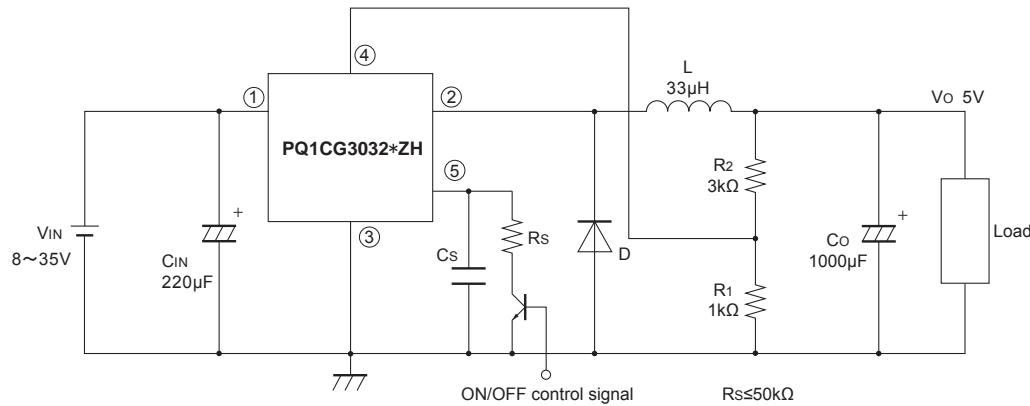


Fig.16 Polarity Inversion Type Circuit Diagram

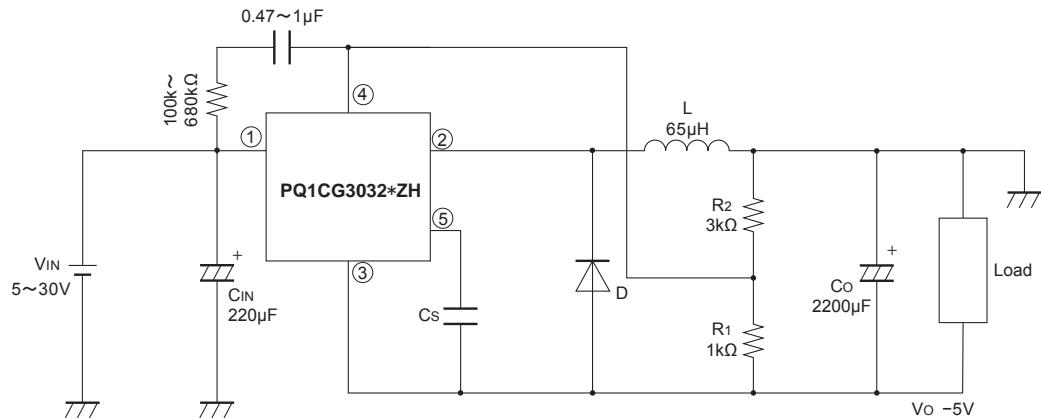

In case that polarity is reverse, depending on the conditions, there is cases that output voltage can not gain, please use this device after confirming the output voltage at the actual conditions.