

# M3T-F160-128NRD

Converter for Connecting 160-core Flexible Board FLX160 to 128-pin 0.5mm-pitch LQFP

## Function

The M3T-F160-128NRD is a converter for connecting the FLX160 160-core flexible board to a foot pattern of a 128-pin 0.5mm-pitch LQFP (128P6Q-A). This converter can be used during debugging and board-mounted evaluation in common.


## Attaching Procedure

### When debugging


- (1) Mount the NQPACK128RD on the foot pattern of the target system.
- (2) Attach the YQPACK128RD on top of (1).
- (3) Screw down the YQPACK128RD with YQ-GUIDE's.
- (4) Connect the probe of top of emulator to the upper connector of the M3T-F160-128NRD.
- (5) Connect the YQPACK128RD and M3T-F160-128NRD together for use.

### During board-mounted evaluation

On top of NQPACK128RD that is mounted on the target system, attach the MCU with on-chip flash memory or one-time PROM and the HQPACK128RD (option) in that order.

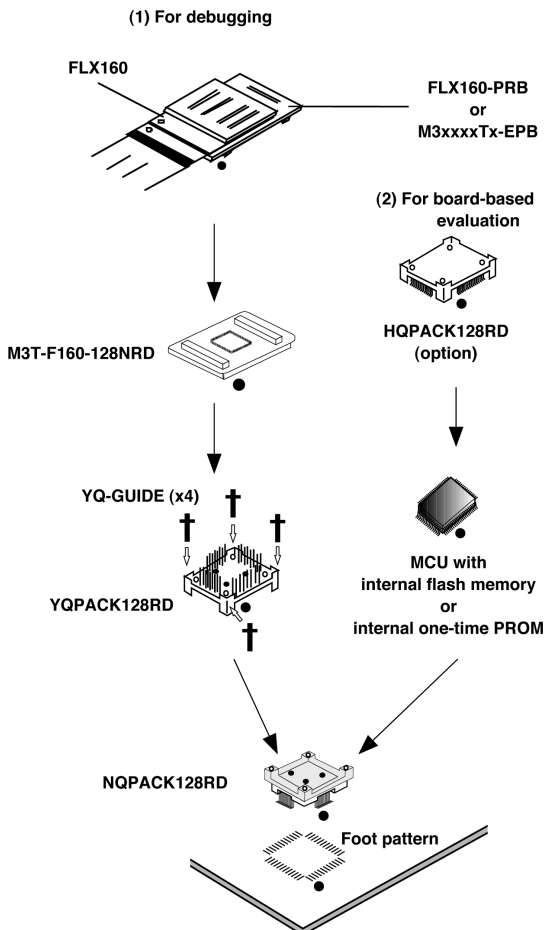

## External View and Dimensions

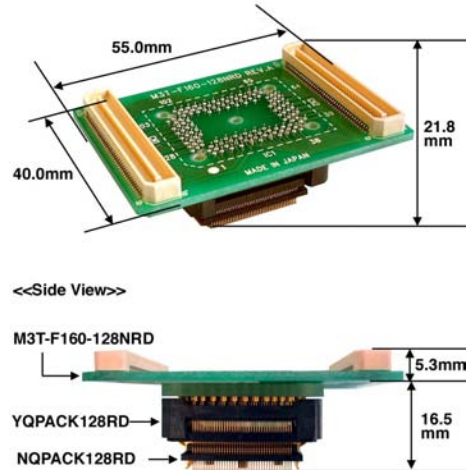


## Package Components

- M3T-F160-128NRD converter
- YQPACK128RD (made by Tokyo Eletech Co., Ltd.)
- NQPACK128RD (made by Tokyo Eletech Co., Ltd.)
- YQ-GUIDE (× 4)
- Phillips screw driver (made by Tokyo Eletech Co., Ltd.)
- User's manual

\*Required components to connect to the target system are included with this product package. Each component made by Tokyo Eletech Co., Ltd. is optionally available alone from Tokyo Eletech Co., Ltd. See Appendix G "Contact Addresses for Partner Products".

## Recommended Foot Pattern (Unit: mm)

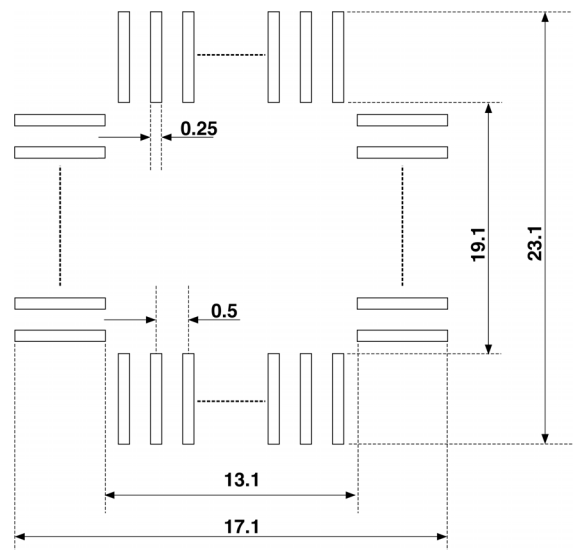

[Ordering Information] See Appendix H "Ordering Information".