

# STRAIGHT PLUG




with mechanical clamp nut



To specify a complete plug, substitute the Dash No. of the contact insert selected, for the Asterisk (\*) in the Catalog No. below. NOTE: The jack nut should not be used with current rupture insert configurations.

A PLUG WITH JACK COUPLING NUT SHOULD BE USED WITH INSERTS HAVING 37 OR MORE CONTACTS

Size Cable	Shell Size	Cat. No. With Standard Coupling Nut	DIMENSIONS WITH STANDARD CABLE ADAPTER					Cat. No. With Jack Coupling Nut	
			A	B	C	D	E		
			WITH STANDARD CABLE ADAPTER						WITH LONG CABLE ADAPTER
Select from Table Below and Substitute Symbol No. for Delta Δ	12	ZPLM-Δ 12-*	6 1/8	1 13/16	6 23/32	2 3/8	1 3/4	ZPLMJ-Δ 12-*	
	16	ZPLM-Δ 16-*	6 7/16	2 5/16	7 1/32	3	2 1/4	ZPLMJ-Δ 16-*	
	20	ZPLM-Δ 20-*	7	2 13/16	7 19/32	3 3/4	2 3/4	ZPLMJ-Δ 20*	
	C20	ZPLM-Δ C20-*	7 1/2	2 13/16	8 3/32	3 3/4	2 3/4	ZPLMJ-Δ C20-*	
	24	ZPLM-Δ 24-*	7 9/16	3 5/16	8 5/32	4 1/2	3 1/4	ZPLMJ-Δ 24-*	
	C24	ZPLM-Δ C24-*	8 1/16	3 5/16	8 21/32	4 1/2	3 1/4	ZPLMJ-Δ C24-*	
	28	ZPLM-Δ 28-*	8 1/8	3 13/16	8 23/32	5 1/8	3 3/4	ZPLMJ-Δ 28-*	
	C28	ZPLM-Δ C28-*	8 5/8	3 13/16	9 7/32	5 1/8	3 3/4	ZPLMJ-Δ C28-*	
	12	ZPLML-Δ 12-*	8 3/8	1 13/16	8 31/32	2 3/8	1 3/4	ZPLMLJ-Δ 12-*	
	16	ZPLML-Δ 16-*	8 11/16	2 5/16	9 9/32	3	2 1/4	ZPLMLJ-Δ 16-*	
	20	ZPLML-Δ 20-*	9 1/4	2 13/16	9 27/32	3 3/4	2 3/4	ZPLMLJ-Δ 20*	
	C20	ZPLML-Δ C20-*	9 3/4	2 13/16	10 11/32	3 3/4	2 3/4	ZPLMLJ-Δ C20-*	
	24	ZPLML-Δ 24-*	9 13/16	3 5/16	10 13/32	4 1/2	3 1/4	ZPLMLJ-Δ 24-*	
	C24	ZPLML-Δ C24-*	10 5/16	3 5/16	10 29/32	4 1/2	3 1/4	ZPLMLJ-Δ C24-*	
28	ZPLML-Δ 28-*	10 1/8	3 13/16	10 23/32	5 1/8	3 3/4	ZPLMLJ-Δ 28-*		
C28	ZPLML-Δ C28-*	10 5/8	3 13/16	11 7/32	5 1/8	3 3/4	ZPLMLJ-Δ C28-*		

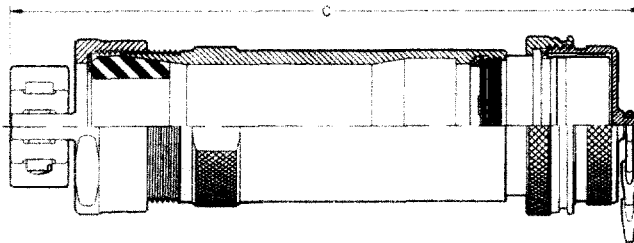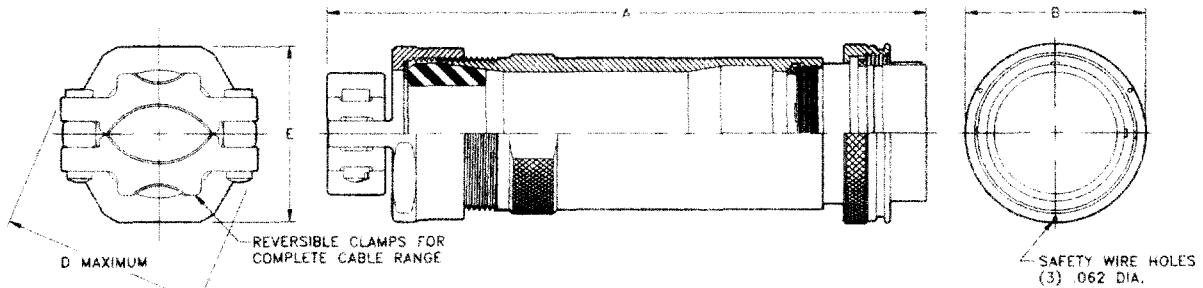

To specify plug with environmental cover, change third letter in Part No. "L" to "E". Example: ZPLM changes to ZPEM.

## OIL-RESISTANT RUBBER GROMMETS—SYMBOL NUMBERS OF SIZES AVAILABLE

Substitute the symbol Number for the Delta Δ in the Catalog Number of Plug. Example: ZPLM-Δ 12-\* for .500 to .625 Dia. Cable changes to ZPLM-10 12-\*.

Cable Dia.	Shell 12	Shell 16	Shells 20 & C20	Shells 24 & C24	Shells 28 & C28	Cable Dia.	Shell 12	Shell 16	Shells 20 & C20	Shells 24 & C24	Shells 28 & C28
.062 to .125	02	..	..	..	..	1.500 to 1.625	..	..	26	26	26
.125 to .250	04	..	..	..	..	1.625 to 1.750	..	..	28	28	28
.250 to .375	06	06	..	..	..	1.750 to 1.875	..	..	30	30	30
.375 to .500	08	08	..	..	..	1.875 to 1.937	..	..	31	..	..
.500 to .625	10	10	10	..	..	1.875 to 2.000	..	..	..	32	32
.625 to .750	12	12	12	..	..	2.000 to 2.125	..	..	..	34	34
.750 to .875	14	14	14	..	..	2.125 to 2.250	..	..	..	36	36
.875 to .937	15	..	..	..	..	2.250 to 2.375	..	..	..	38	38
.875 to 1.000	..	16	16	16	..	2.375 to 2.437	..	..	..	39	..
1.000 to 1.125	..	18	18	18	..	2.375 to 2.500	..	..	..	..	40
1.125 to 1.250	..	20	20	20	..	2.500 to 2.625	..	..	..	..	42
1.250 to 1.375	..	22	22	22	..	2.625 to 2.750	..	..	..	..	44
1.375 to 1.437	..	23	..	..	..	2.750 to 2.875	..	..	..	..	46
1.375 to 1.500	..	..	24	24	24						