

Introduction

(General Description)

The EC9509C / 08C Series is a high-precision voltage detector developed using CMOS process. The detection voltage is fixed internally with an accuracy of $\pm 2.0\%$. A time delayed reset can be accomplished with the addition of an external capacitor. Two output forms, N-channel open-drain and CMOS output, are available.

Features

- Ultra-low current consumption
 1.0 mA typ. (VDD=2.0 V)
 1.1 mA typ. (VDD=3.5 V)
- High-precision detection voltage $\pm 2.0\%$
- COperating voltage range 2.0 V to 6.0 V
- Detection voltage 2.2 V to 3.1 V (0.1 V step)
- Hysteresis characteristics 5 % typ.
- Two output forms: CMOS
 output active "L" Open-drain
 output active "L"

Applications

- Power supply monitor for portable equipment such as electronic organizers, notebook PCs, cellular phones, digital cameras
- Constant voltage power monitor for cameras, communication equipment and video equipment
- Power monitor and reset for CPUs and microcomputers


Packages

SOT-23-5


SOT343

Pin Assignment

(SOT-23-5)





SOT343(SC82)




SOT-23-5 Pin No	SOT343 Pin No	SYMBOL	DESCRIPTION
1	4	OUT	VOLTAGE DETECTION PIN
2	2	VDD	VOLTAGE INPUT PIN
3	1	VSS	GROUND PIN
4	---	N.C	NO CONNECTION
5	3	CD	CONNECTION PIN DELAY CAPACITOR

Block Diagrams

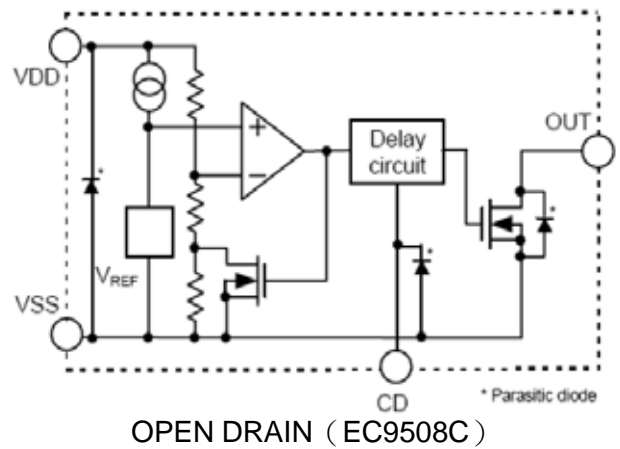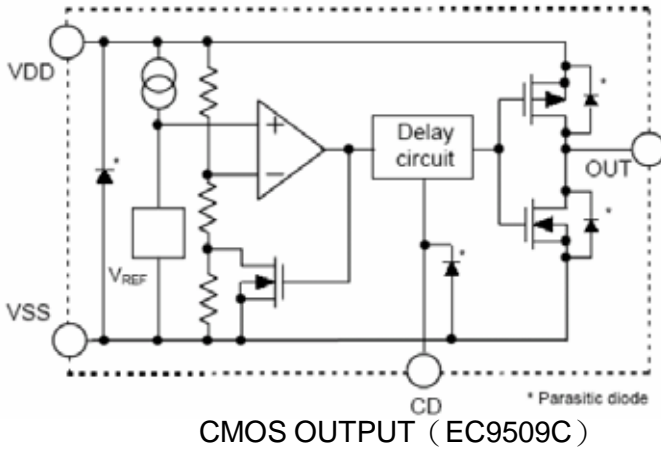


Ordering Information

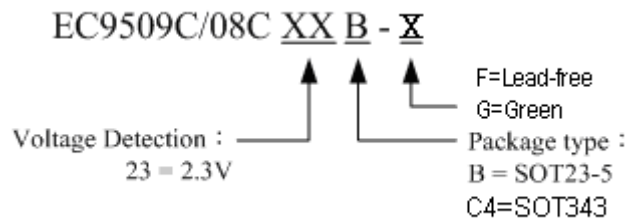

PART NUMBER	MARKING ID	PACKAGE	PACKING TYPE
EC9508C XXB-F	08CXXF	SOT23-5	TAPE / REEL
EC9508C XXB-G	08CXXG	SOT23-5	TAPE / REEL
EC9508CXXC4-G	XXYW	SOT343	TAPE/ REEL
EC9509C XXB-F	09CXXF	SOT23-5	TAPE / REEL
EC9509C XXB-G	09CXXG	SOT23-5	TAPE / REEL

Package Marking Indication SOT-23-5 Marking

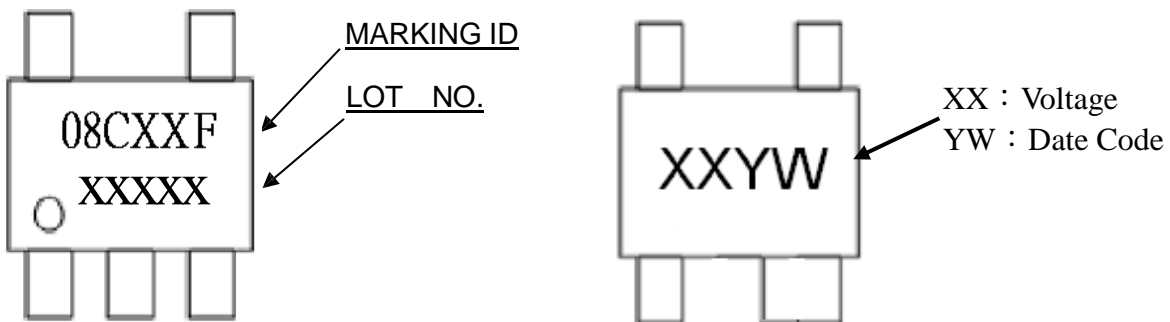



BUILT-IN DELAY CIRCUIT HIGH-PRECISION VOLTAGE DETECTOR

EC9509C/ 08C

Absolute Maximum Ratings

PARAMETER	SYMBOL	RATING	UNIT	
POWER SUPPLY VOLTAGE	$V_{DD} - V_{SS}$	8	V	
CD PIN INPUT VOLTAGE	V_{CD}	$V_{SS} - 0.3$ TO $V_{DD} + 0.3$	V	
OUTPUT VOLTAGE	V_{OUT}	$V_{SS} - 0.3$ TO $V_{DD} + 0.3$	V	
OUTPUT CURRENT	I_{OUT}	4	mA	
POWER DISSIPATION	P_d	SOT23 -5	500	mW
		SOT343	250	mW
OPERATING TEMPERATURE	T_{OPR}	-40 TO +85	°C	
STORAGE TEMPERATURE	T_{STG}	-40 TO +125	°C	
JUNCTION TEMPERATURE	$T_j(\max)$	150	°C	
JUNCTION TO AMBIENT THERMAL RESISTANCE	θ_{ja}	347	°C/W	
JUNCTION TO CASE THERMAL RESISTANCE	θ_{jc}	148	°C/W	


Electrical Characteristics

CMOS output products

($T_a=25^\circ\text{C}$ unless otherwise specified)


Parameter	Symbol	Conditions	Min	Typ	Max	Unit	Test circuit
Detection voltage	$-V_{DET}$	--	$-V_{DET}(S)$ X 0.98	$-V_{DET}$	$-V_{DET}(S)$ X 1.02	V	1
Hysteresis width	V_{HYS}	--	$-V_{DET}$ X0.03	$-V_{DET}$ X0.05	$-V_{DET}$ X0.08	V	1
Current consumption	I_{SS}	$V_{DD}=4V$	--	4.5	6.5	uA	2
Operating voltage	V_{DD}	--	2.0	--	6.0	V	1
Output Current of output transistor	I_{OUT}	N-channel $V_{DS}=0.5V$ $V_{DD}= 2.4V$	2.88	4.98	--	mA	3
		P-channel $V_{DS}=V_{DD}-0.5V$ $V_{DD}=4.8 V$	1.43	2.39	--	mA	5
Delay time	t_d	$CD=4.7nF$ $V_{DD}=3V$	6	13	20	ms	4

Test circuit

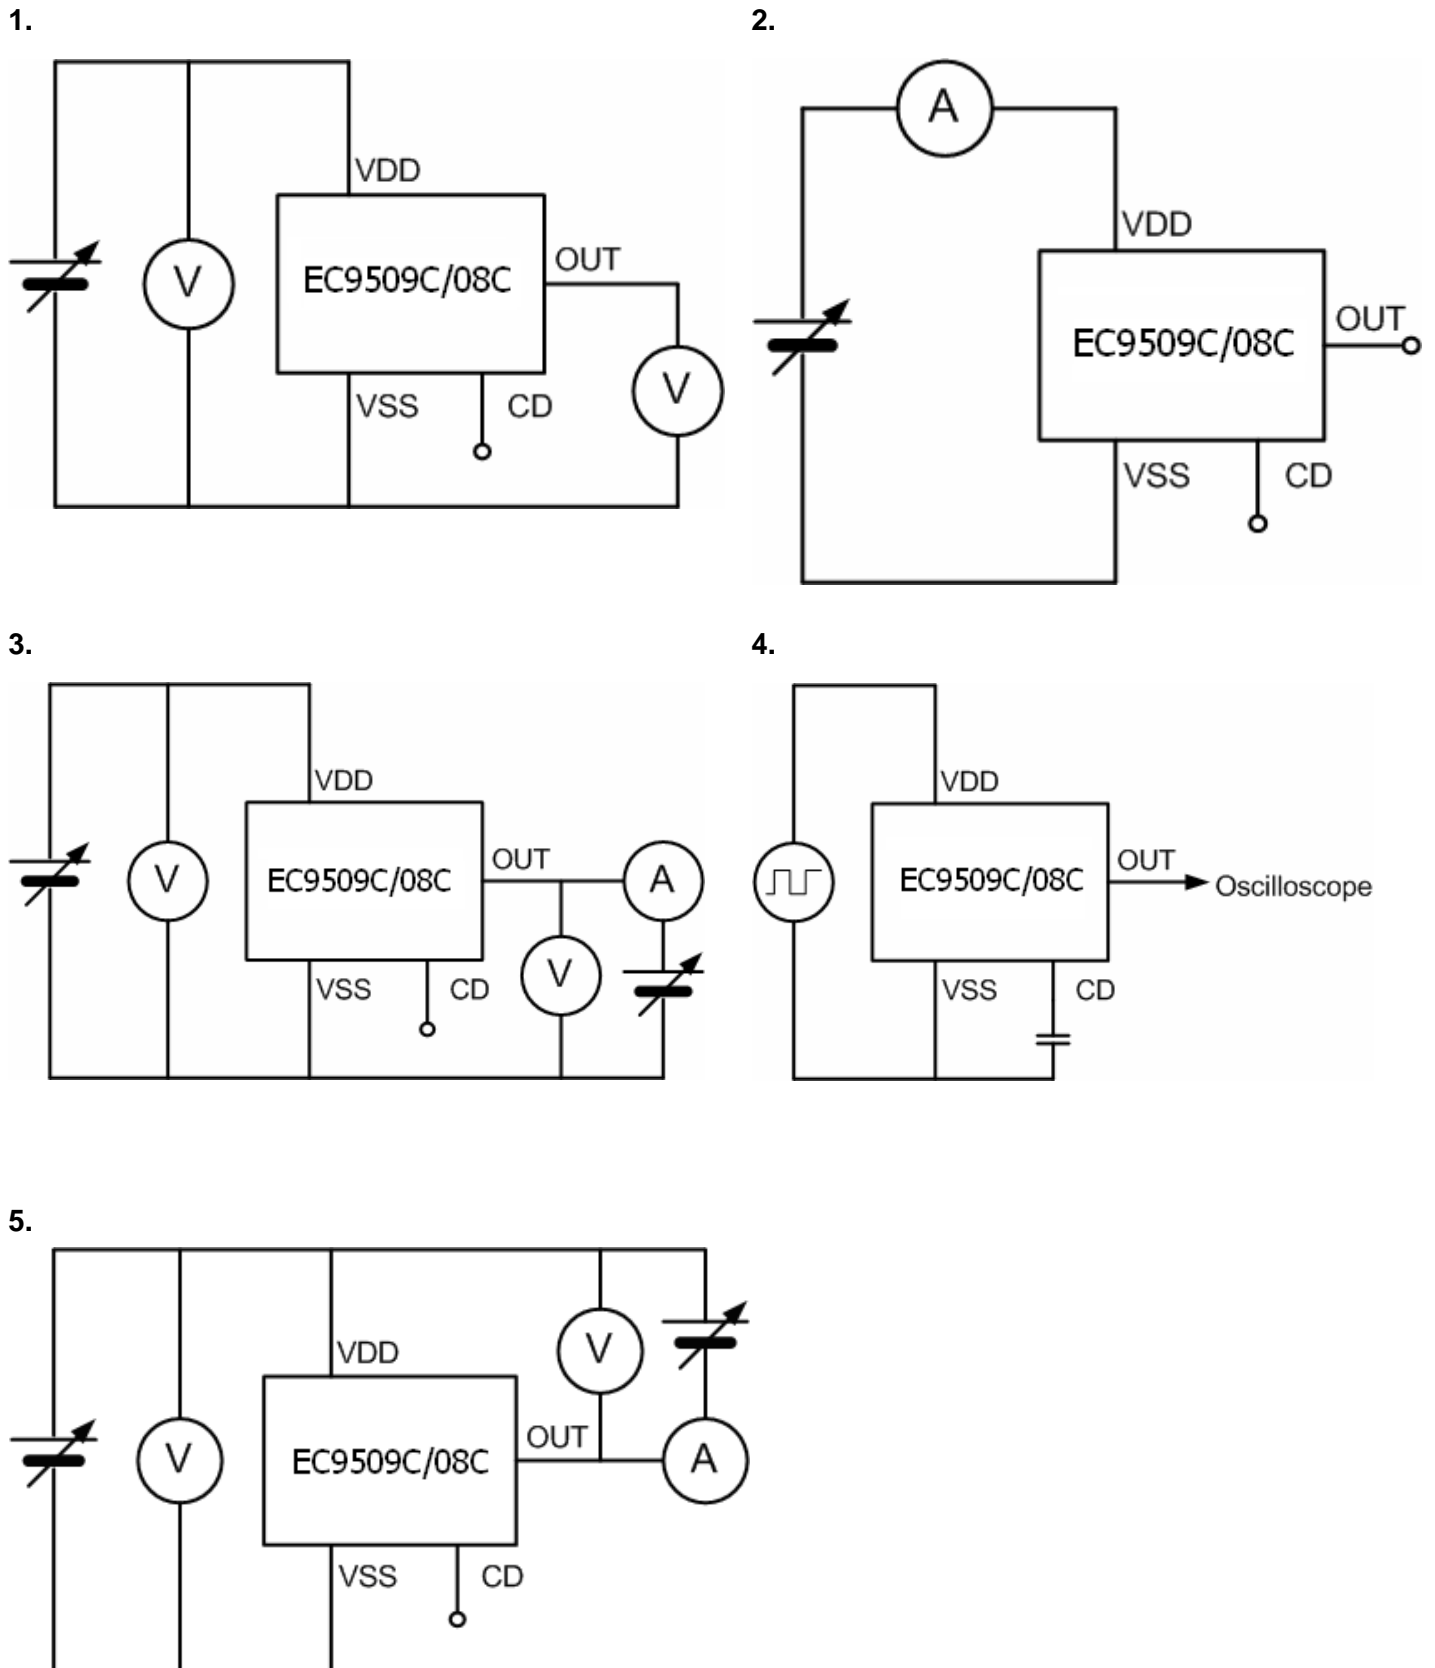


Timing chart

1. CMOS active low output

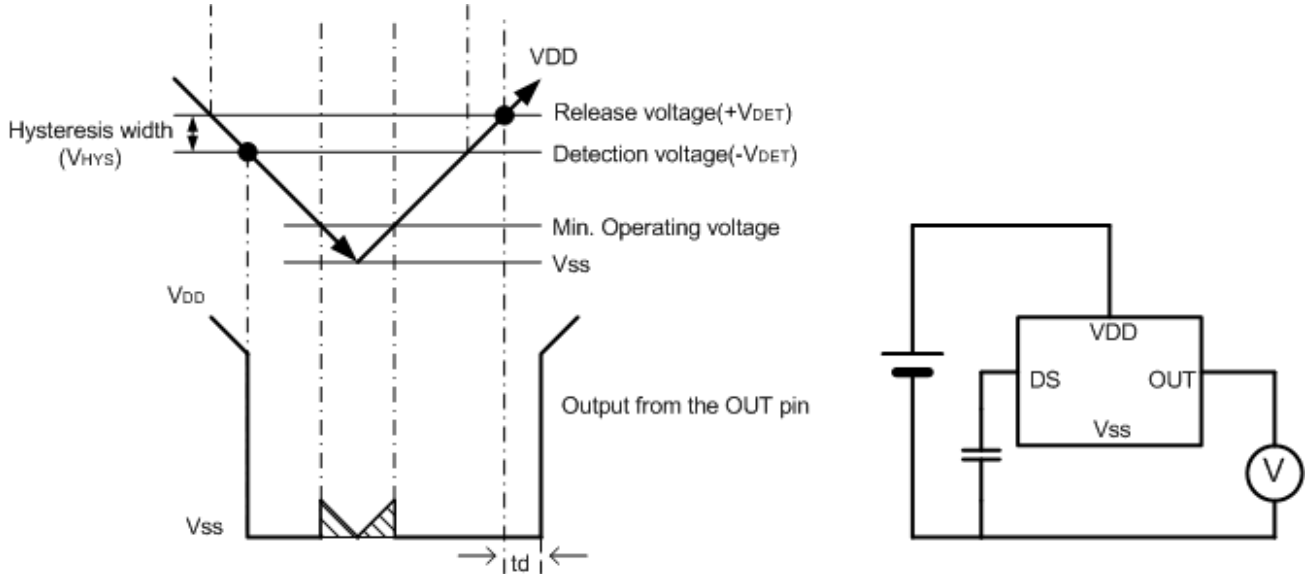

2. Nch open-drain active low output

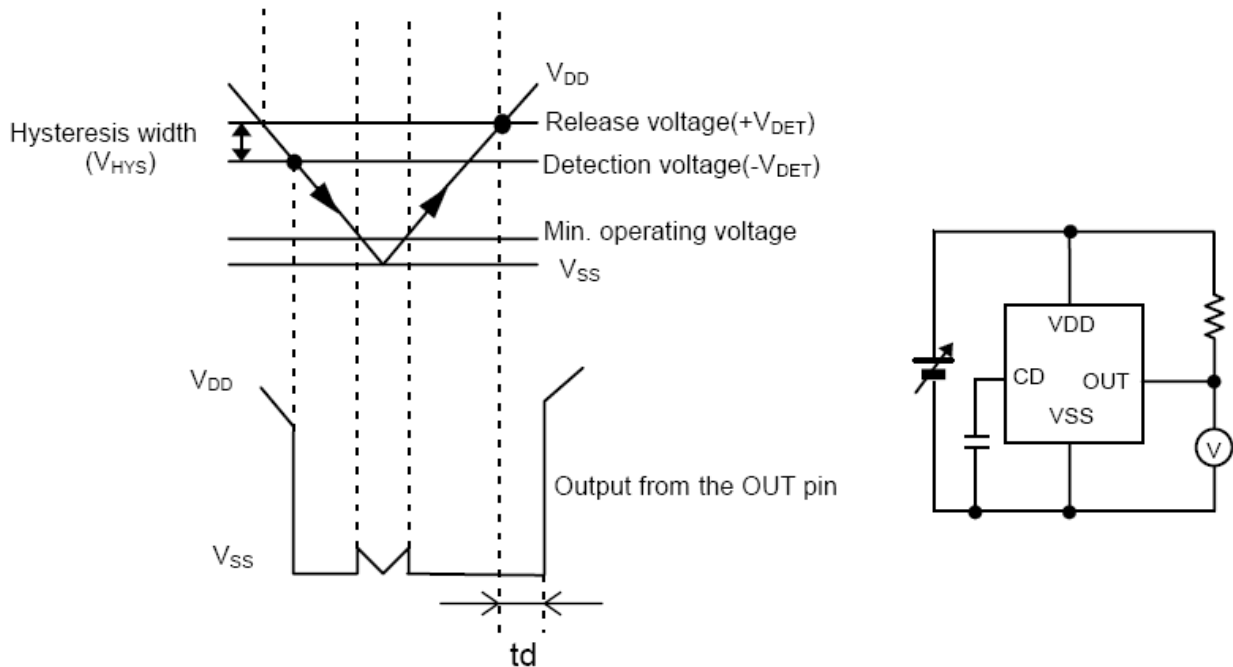

Note : For values of VDD less than minimum operating voltage, values of OUT terminal output is free of the shaded region.

Definition of Technical Terms

1. Detection voltage ($-V_{DET}$)

Detection voltage $-V_{DET}$ is a voltage at which the output turns to low. This detection voltage varies slightly among products of the same specification. The variation of detection voltage between the specified minimum [$(-V_{DET})_{min.}$] and maximum [$(-V_{DET})_{max.}$] is called the detection voltage range (See Figure A).

2. Release voltage ($+V_{DET}$)

Release voltage $+V_{DET}$ is a voltage at which the output turns to high. This release voltage varies slightly among products of the same specification. The variation of release voltage between the specified minimum [$(+V_{DET})_{min.}$] and maximum [$(+V_{DET})_{max.}$] is called the release voltage range (See B).

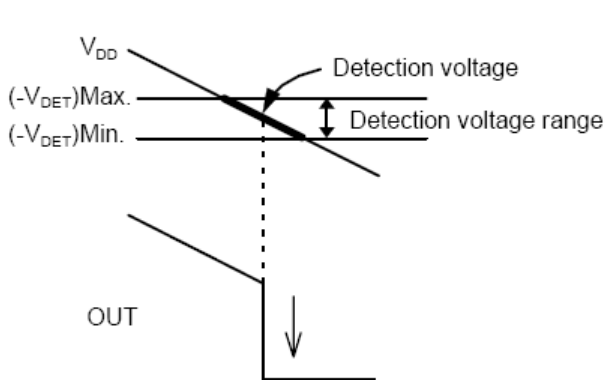


FIGURE A

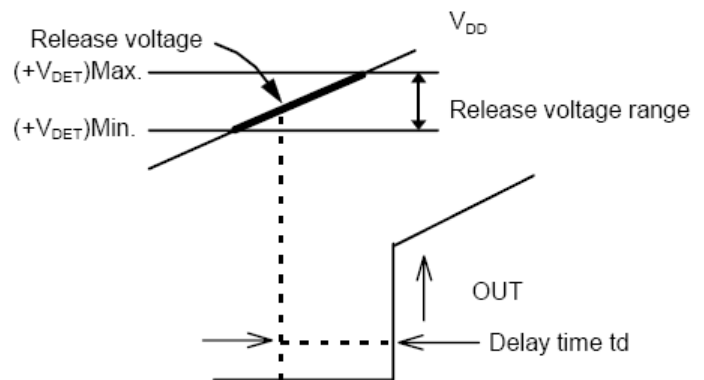



FIGURE B

3. Hysteresis width (V_{HYS})

Hysteresis width is the voltage difference between the detection voltage and the release voltage. The existence of the hysteresis width avoids malfunction caused by noise on input signal.

4. Delay time (t_d)

Delay time is a time internally measured from the instant at which V_{DD} pin exceeds the release voltage ($+V_{DET}$) to the point at which the output of the OUT pin inverts. The delay time changes according to the external capacitor C_D .

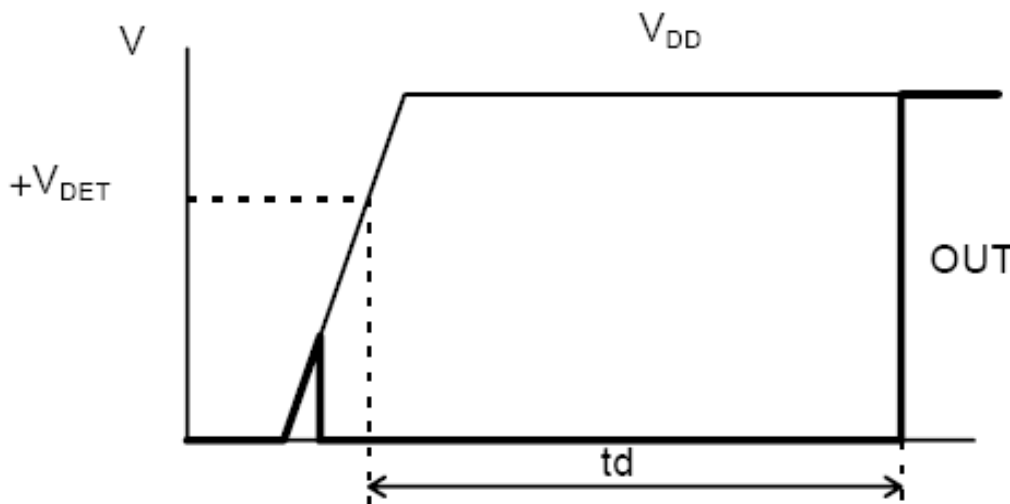

5. Short-circuit current


Short-circuit current refers to the current which flows instantaneously at the time of detection and release of a voltage detector. Short-circuit current is large in CMOS output products, and small in N channel open-drain output products.

6. Oscillation


In applications where a resistor is connected to the voltage detector input as shown in Figure , taking a CMOS active low product for example, the short-circuit current, which flows at release when the output goes from low to high, causes a voltage drop equal to [short-circuit current] × [input resistance] across the resistor. When the input voltage falls below the detection voltage -VDET as a result, the output voltage goes to low level. In this state, the short-circuit current stops and its resultant voltage drop disappears, and the output goes from low to high.

Short-circuit current again starts flowing, a voltage drop appears, and oscillation is finally induced by repeating the process.

Following is an example for bad implementation: input voltage divider for a CMOS output product.

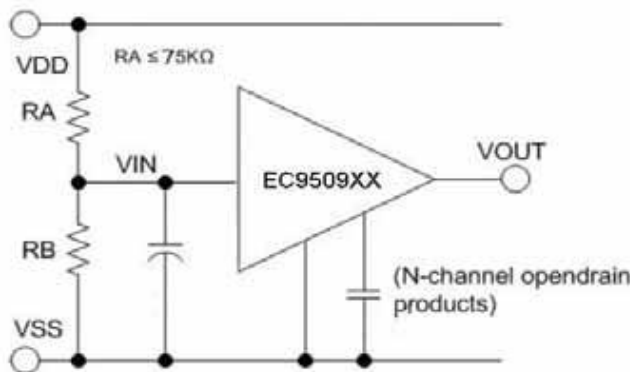

Standard Circuit

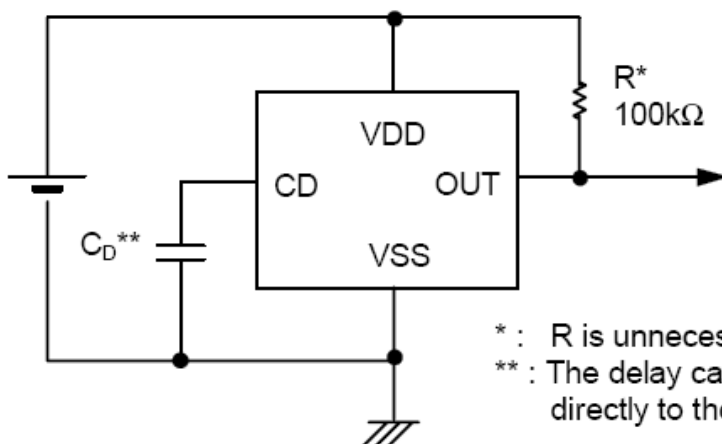


* : R is unnecessary for CMOS output products.

** : The delay capacitor C_D should be connected directly to the CD pin and to the VSS pin.


Application Circuit Examples

1. Microcomputer reset circuits

With the EC9509CXX Series which has a low operating voltage, a high-precision detection voltage and hysteresis characteristic, the reset circuits shown in Figures A to B can be easily constructed.

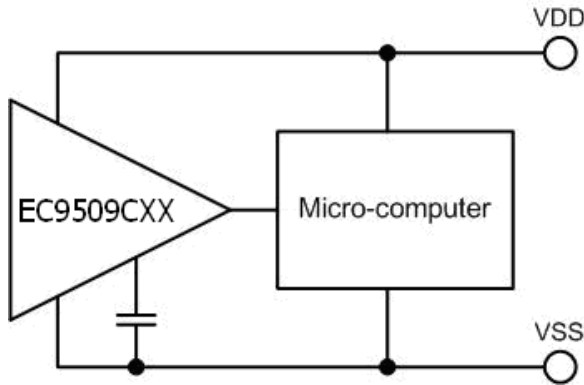

Figures A

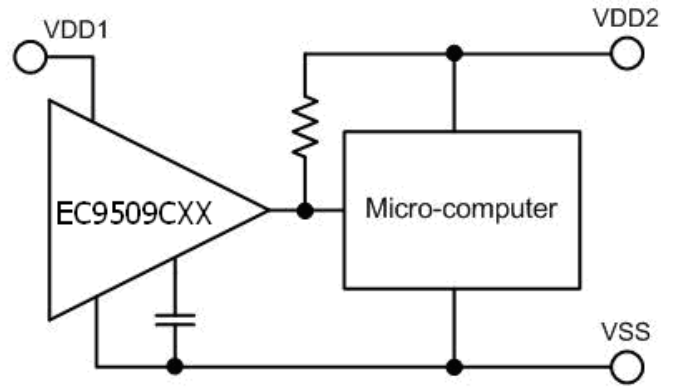


(Nch open-drain output products only)


Figures B

2. Change of detection voltage

In Nch open-drain output products of the EC9508CXX Series, detection voltage can be changed using resistance dividers or diodes as shown in Figures C and D. Hysteresis width is also changed.

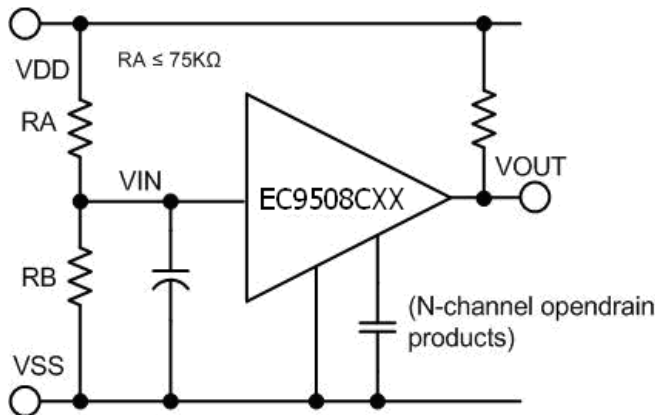

Figures C

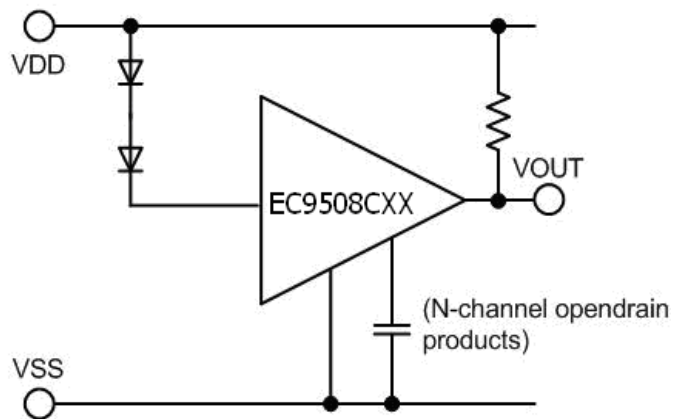

Figures D

$$\text{Detection Voltage} = \frac{RA + RB}{RB} - V_{DET}$$

$$\text{Hysteresis width} = \frac{RA + RB}{RB} - V_{HYS}$$

$$\text{Detection Voltage} = Vf1 + Vf2 + (-V_{DET})$$


Note1: If RA and RB are large, the hysteresis width may also be larger than the value given by the equation above due to short-circuit current (which flows slightly in an N channel open-drain product).

Note2: RA should be 75k Ω or less to prevent oscillation.

PACKAGE TYPE : SOT23-5

● Dimensions

Unit : mm

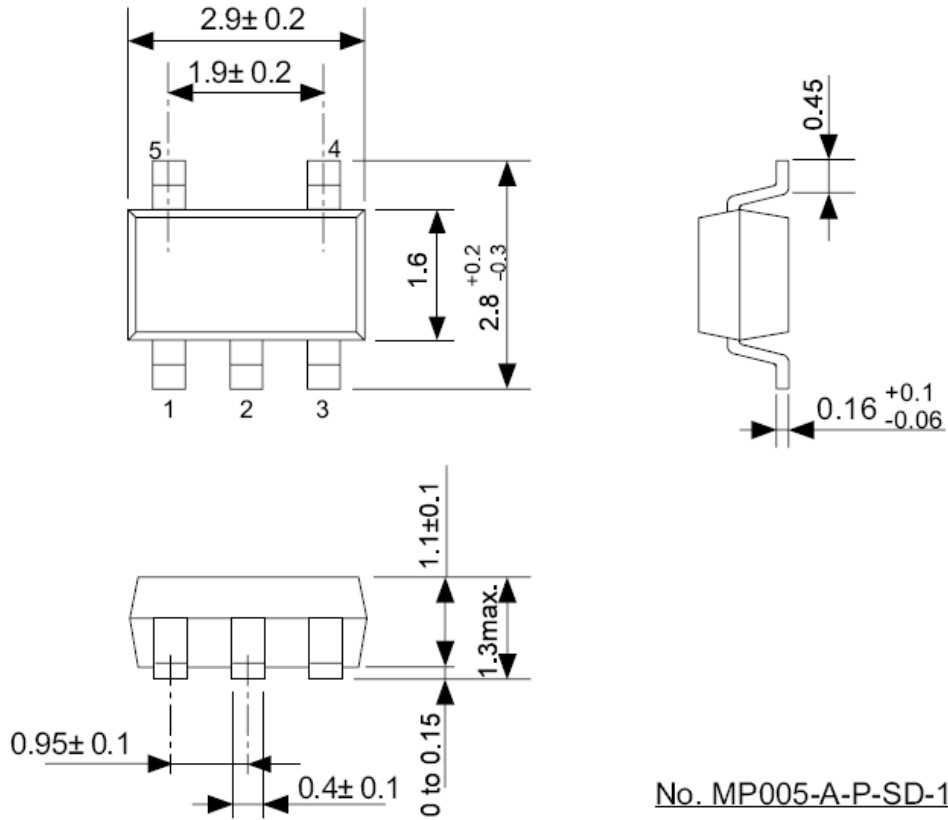


No. MP005-A-P-SD-1.1



BUILT-IN DELAY CIRCUIT HIGH-PRECISION VOLTAGE DETECTOR

EC9509C/ 08C

PACKAGE TYPE : SOT343

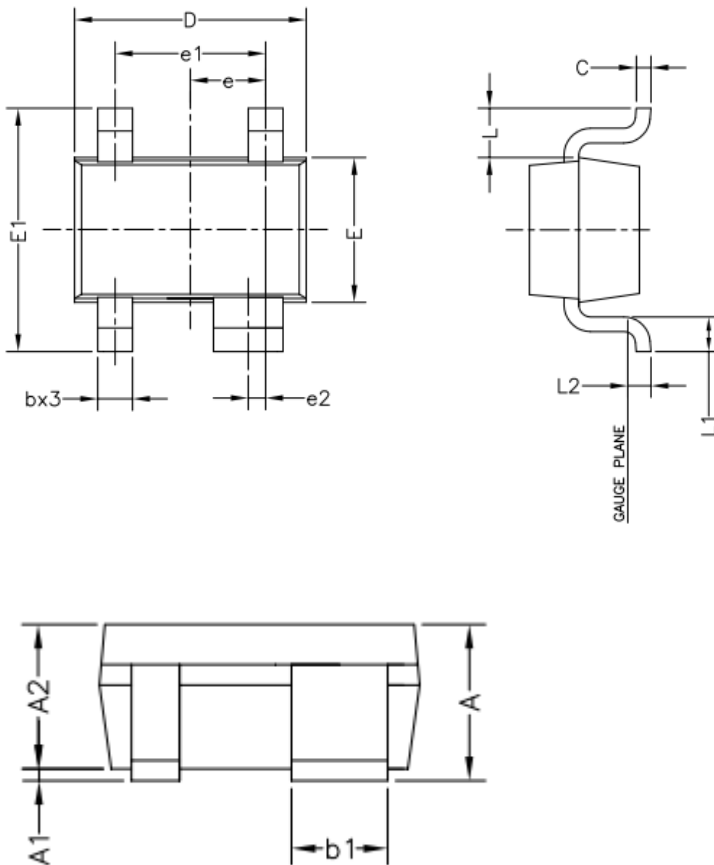

Symbol	Millimeters		Inches	
	MIN.	MAX.	MIN.	MAX.
A	0.90	1.10	.036	.044
A1	0.025	0.10	.001	.004
A2	0.875	1.00	.035	.040
b	0.20	0.40	.008	.016
b1	0.40	0.60	.015	.024
C	0.10	0.15	.004	.006
D	1.90	2.10	.076	.084
E	1.15	1.35	.046	.054
E1	2.00	2.30	.080	.091
e	0.65 BSC.		.026 BSC.	
e1	1.30 BSC.		.052 BSC.	
e2	0.15 BSC.		.006 BSC.	
L	0.425 REF.		.017 REF.	
L1	0.25	0.45	.010	.018
L2	0.200 REF.		.007 REF.	

Note:

1. All dimensions are in millimeters, and the dimensions in inches are for reference only.
2. 1mm=40mils=0.04inches