


TOSHIBA TRANSISTOR SILICON NPN EPITAXIAL TYPE (PCT PROCESS)

**RN1601, RN1602, RN1603, RN1604, RN1605, RN1606**


SWITCHING, INVERTER CIRCUIT, INTERFACE CIRCUIT AND DRIVER CIRCUIT APPLICATIONS.

Unit in mm

- Including Two Devices in SM6 (Super Mini Type with 6 leads)
- With Built-in Bias Resistors
- Simplify Circuit Design
- Reduce a Quantity of Parts and Manufacturing Process
- Complementary to RN2601~RN2606

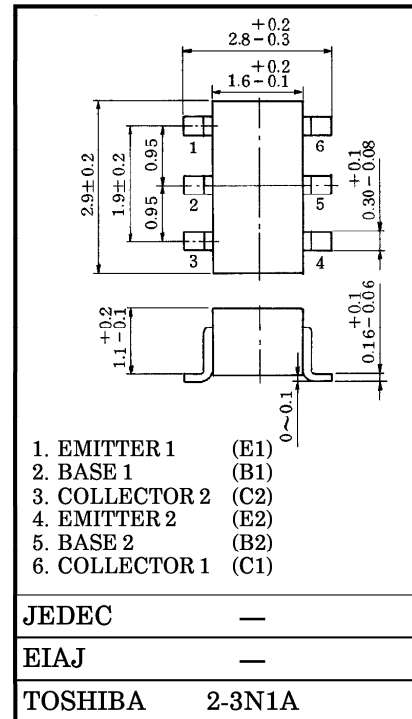


EQUIVALENT CIRCUIT AND BIAS RESISTOR VALUES



TYPE NO.	R1 (kΩ)	R2 (kΩ)
RN1601	4.7	4.7
RN1602	10	10
RN1603	22	22
RN1604	47	47
RN1605	2.2	47
RN1606	4.7	47

Weight : 0.015g

EQUIVALENT CIRCUIT (TOP VIEW)



MAXIMUM RATINGS (Ta = 25°C) (Q1, Q2 COMMON)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Collector-Base Voltage	RN1601~1606	V <sub>CB0</sub>	50	V
Collector-Emitter Voltage		V <sub>CEO</sub>	50	V
Emitter-Base Voltage	RN1601~1604	V <sub>EBO</sub>	10	V
	RN1605, 1606		5	
Collector Current	RN1601~1606	I <sub>C</sub>	100	mA
Collector Power Dissipation		P <sub>C</sub> *	300	mW
Junction Temperature		T <sub>j</sub>	150	°C
Storage Temperature Range		T <sub>stg</sub>	-55~150	°C

\* Total Rating

961001EAA2

● TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.







ELECTRICAL CHARACTERISTICS (Ta = 25°C) (Q1, Q2 COMMON)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	RN1601~1606	ICBO	V <sub>CB</sub> = 50V, I <sub>E</sub> = 0	—	—	100	nA
		ICEO	V <sub>CE</sub> = 50V, I <sub>B</sub> = 0	—	—	500	
Emitter Cut-off Current	RN1601	I <sub>EBO</sub>	V <sub>EB</sub> = 10V, I <sub>C</sub> = 0	0.82	—	1.52	mA
	RN1602			0.38	—	0.71	
	RN1603			0.17	—	0.33	
	RN1604		0.082	—	0.15		
	RN1605		V <sub>EB</sub> = 5V, I <sub>C</sub> = 0	0.078	—	0.145	
	RN1606			0.074	—	0.138	
DC Current Gain	RN1601	h <sub>FE</sub>	V <sub>CE</sub> = 5V, I <sub>C</sub> = 10mA	30	—	—	
	RN1602			50	—	—	
	RN1603			70	—	—	
	RN1604			80	—	—	
	RN1605			80	—	—	
	RN1606			80	—	—	
Collector-Emitter Saturation Voltage	RN1601~1606	V <sub>CE (sat)</sub>	I <sub>C</sub> = 5mA, I <sub>B</sub> = 0.25mA	—	0.1	0.3	V
Input Voltage (ON)	RN1601	V <sub>I (ON)</sub>	V <sub>CE</sub> = 0.2V, I <sub>C</sub> = 5mA	1.1	—	2.0	V
	RN1602			1.2	—	2.4	
	RN1603			1.3	—	3.0	
	RN1604			1.5	—	5.0	
	RN1605			0.6	—	1.1	
	RN1606			0.7	—	1.3	
Input Voltage (OFF)	RN1601~1604	V <sub>I (OFF)</sub>	V <sub>CE</sub> = 5V, I <sub>C</sub> = 0.1mA	1.0	—	1.5	V
	RN1605, 1606			0.5	—	0.8	
Transition Frequency	RN1601~1606	f <sub>T</sub>	V <sub>CE</sub> = 10V, I <sub>C</sub> = 5mA	—	250	—	MHz
Collector Output Capacitance	RN1601~1606	C <sub>ob</sub>	V <sub>CB</sub> = 10V, I <sub>E</sub> = 0 f = 1MHz	—	3	6	pF
Input Resistor	RN1601	R <sub>1</sub>		3.29	4.7	6.11	kΩ
	RN1602			7	10	13	
	RN1603			15.4	22	28.6	
	RN1604			32.9	47	61.1	
	RN1605			1.54	2.2	2.86	
	RN1606			3.29	4.7	6.11	
Resistor Ratio	RN1601~1604	R <sub>1</sub> / R <sub>2</sub>		0.9	1.0	1.1	
	RN1605			0.0421	0.0468	0.0515	
	RN1606			0.09	0.1	0.11	







961001EAA2'

- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.







(Q1, Q2 COMMON)

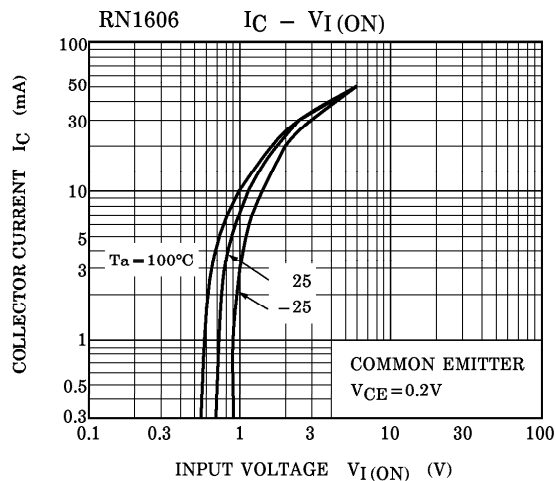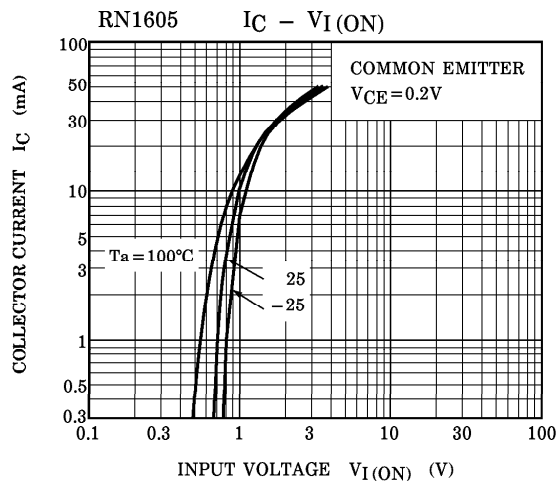
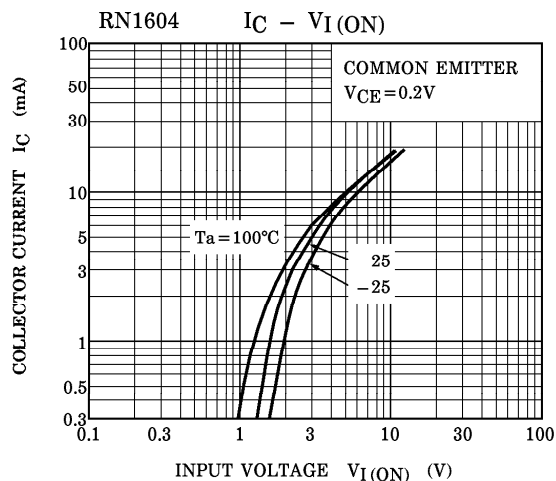
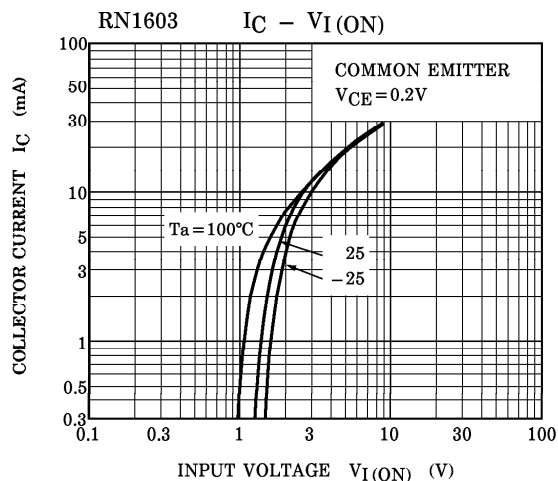
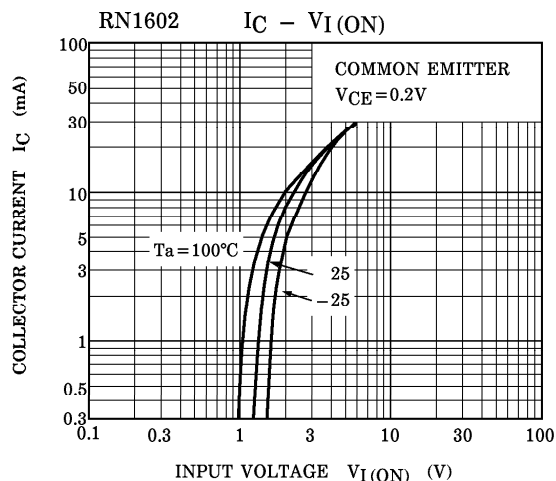
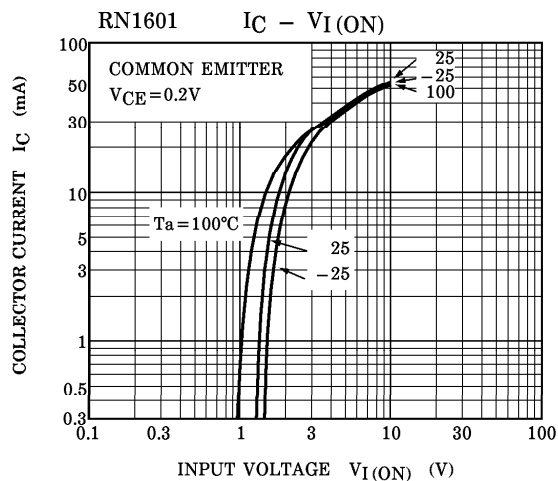


(Q1, Q2 COMMON)

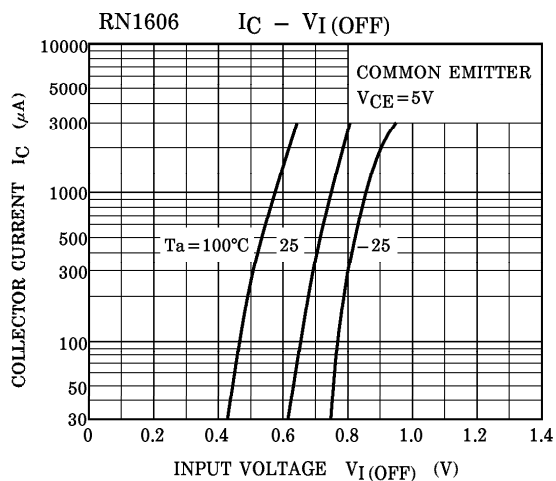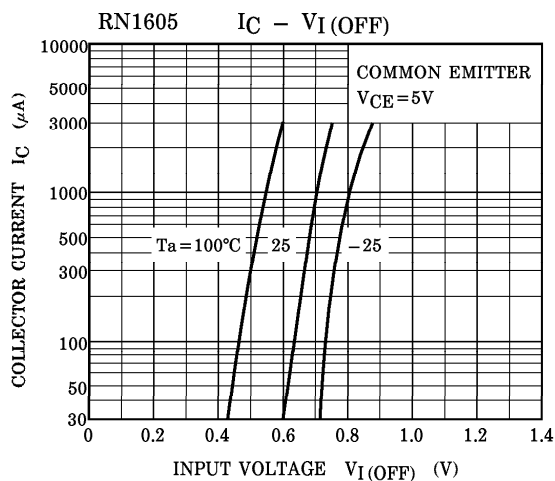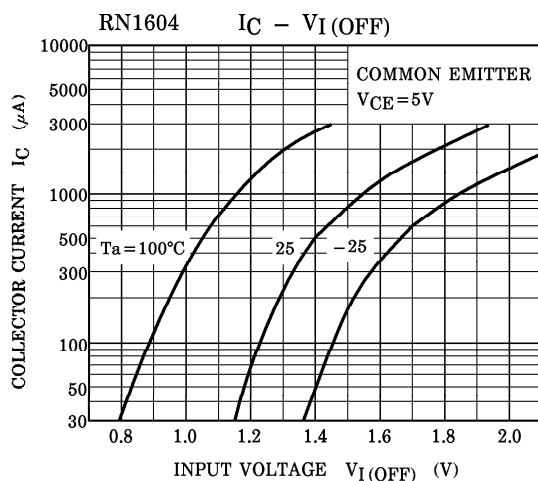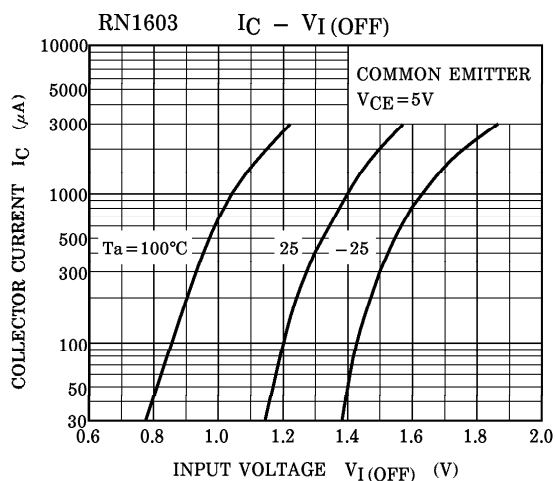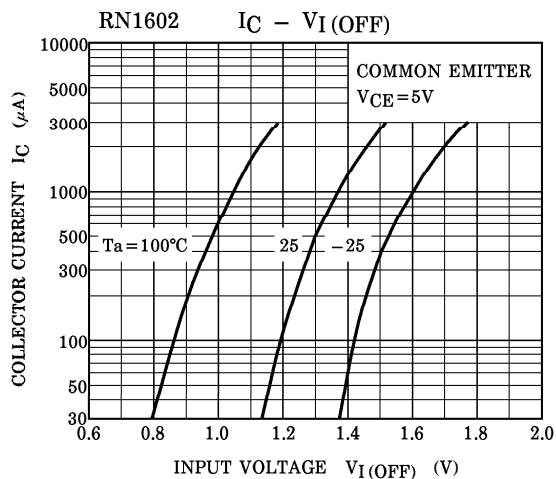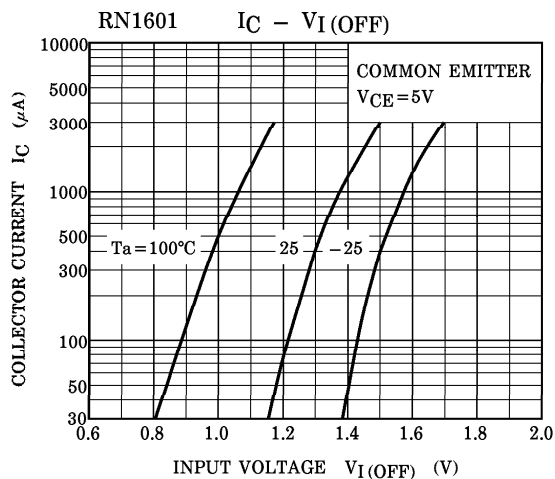

(Q1, Q2 COMMON)

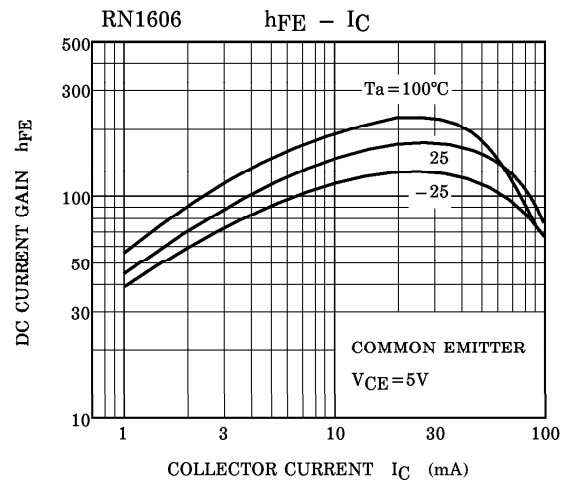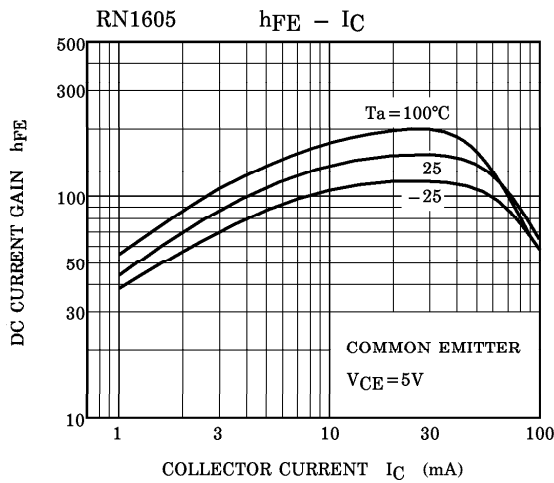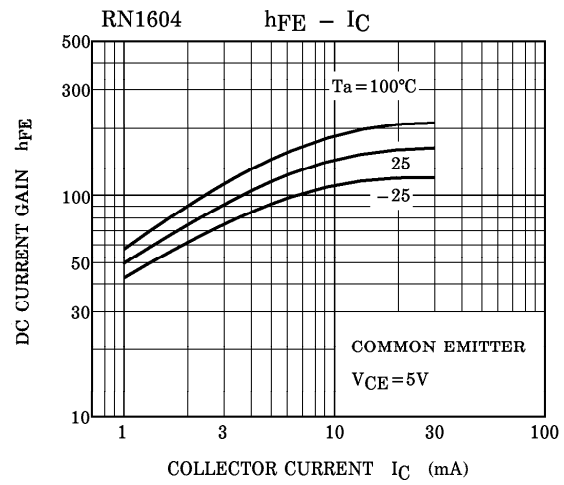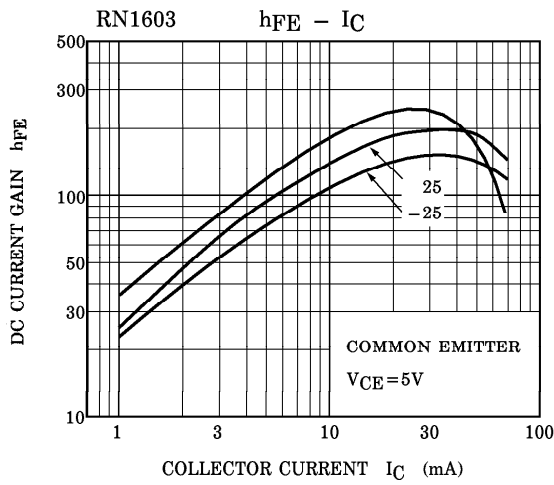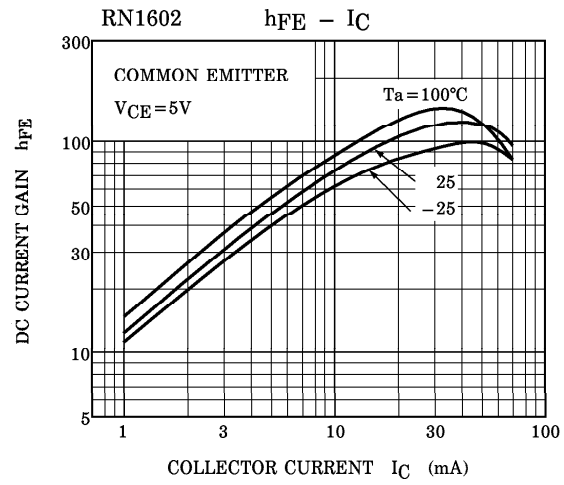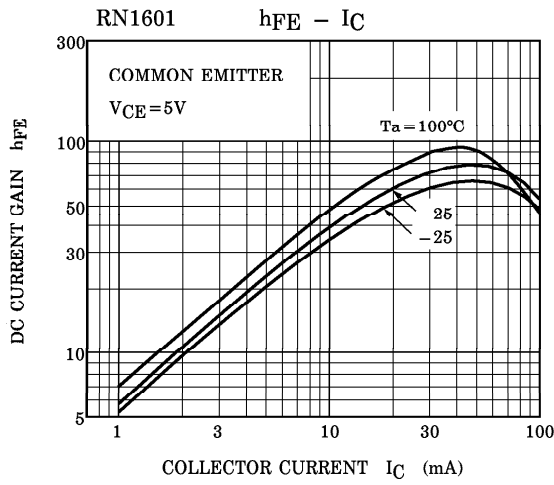

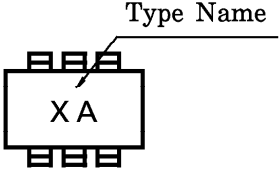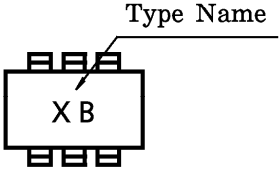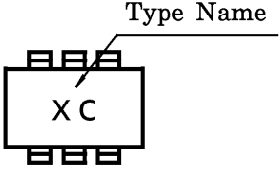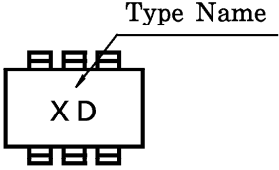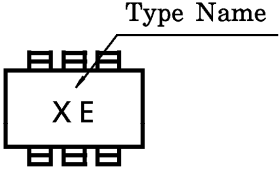TYPE NAME	MARKING
RN1601	
RN1602	
RN1603	
RN1604	
RN1605	
RN1606	