



TSC144C

NPN Digital Transistor



Pin assignment:
1. Input (Base)
2. Gnd (Emitter)
3. Output (Collector)

V_{cc} = 50V
V_{in} = -10V ~ +12V
I_o = 100mA(max.)

Features

- Build-in bias resistor enable the configuration of an inverter circuit without connecting external input resistors (see equivalent circuit)
- The bias resistors consist of thin-film resistors with complete isolation to allow negative biasing of the input. This also has the advantage of almost completely eliminating parasitic effects.
- Only the on/off conditions need to be set for operation, making device design easy.
- Complements the TSA144C


Ordering Information

Part No.	Packing	Package
TSC144CCX	Tape & Reel	SOT-23
TSC144CCU		SOT-323

Note: x is the build-in resistor value type, option as

Code	R1 (KΩ)	R2 (KΩ)	Marking
C	47	47	8C

Equivalent Circuit

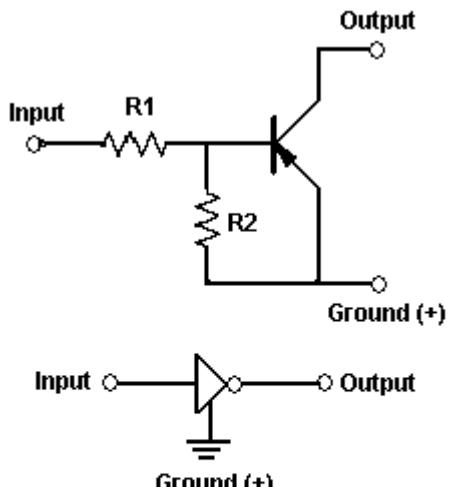

Input : Base

Output : Collector

Ground : Emitter

Absolute Maximum Rating (Ta = 25 °C unless otherwise noted)

Parameter	Symbol	Limit	Unit
Supply Voltage	V _{cc}	50	V
Input Voltage	V _{in}	-10 ~ +12	V
Output Current	I _o	100	mA
		100	
Power Dissipation	P _D	250	mW
		200	
Operating Junction Temperature	T _J	+150	°C
Operating Junction and Storage Temperature Range	T _{STG}	-55 to +150	°C

Note: 1. Single pulse, P_w = 300μS, Duty <= 2%
2. When mounted on an FR-4 PCB



Electrical Characteristics

T_a = 25 °C unless otherwise noted


Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Input Voltage	V _{cc} = 5V, I _o = 100uA	V _{in} (off)	--	--	0.5	V
	V _o = 0.3V, I _o = 2mA	V _{in} (on)	3	--	--	V
Output Voltage	I _o /I _{lin} = 10mA/ 0.5mA	V _o (on)	--	0.1	0.3	V
Input Current	V _{in} = 5V	I _{lin}	--	--	0.18	mA
Output Current	V _{cc} = 50V, V _{in} = 0V	I _o (off)	--	--	0.5	uA
DC Current Gain	V _o = 5V, I _o = 5mA	G _i	68	--	--	
Input Resistance		R ₁	0.7	47	1.3	KΩ
Resistance Ratio		R ₂ /R ₁	0.8		1.2	
Transition Frequency	V _{ce} = 10V, I _e = 5mA, f= 100MHz (note 1)	f _t	--	250	--	MHz

Note : 1. Transition frequency of the device.


2. Pulse test: pulse width <=380uS, duty cycle <=2%

Electrical Characteristics Curve


current gain vs output current

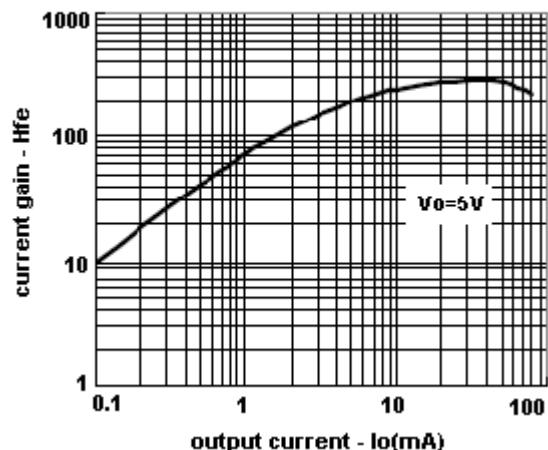


output voltage vs output current

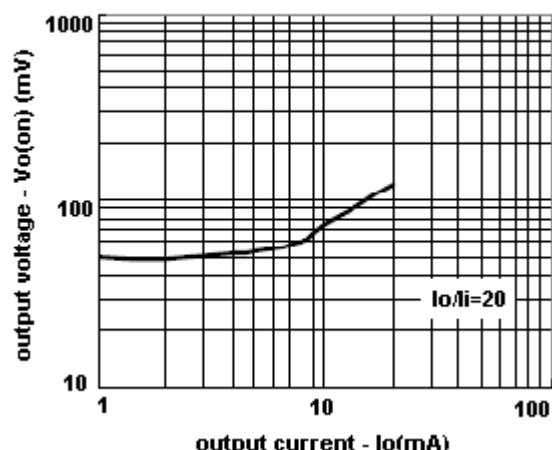


input voltage vs output current (on)

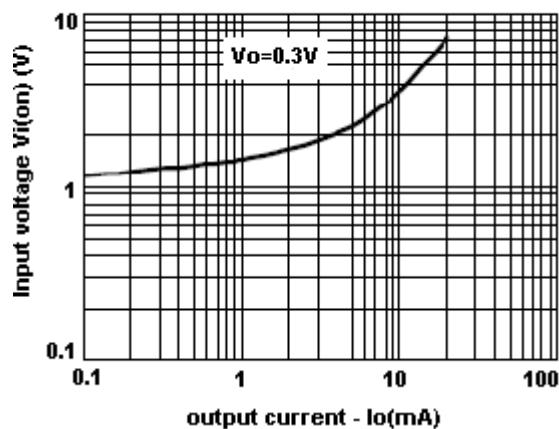


output current vs input voltage (off)

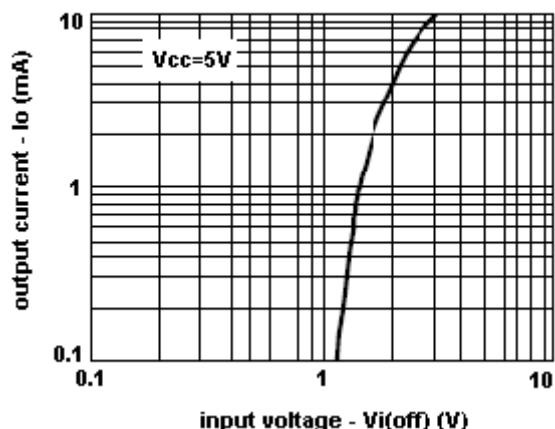

power dissipation vs temperature

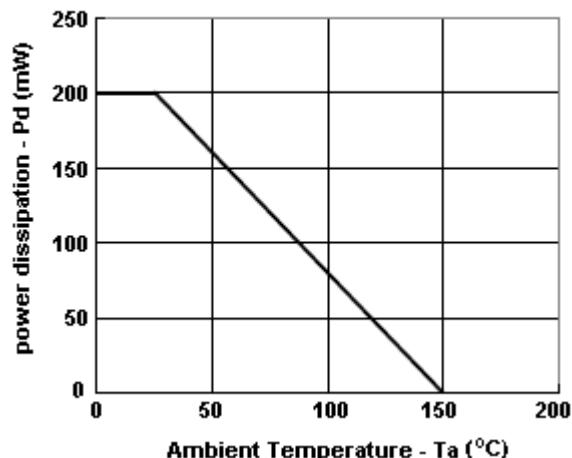


SOT-23 Mechanical Drawing

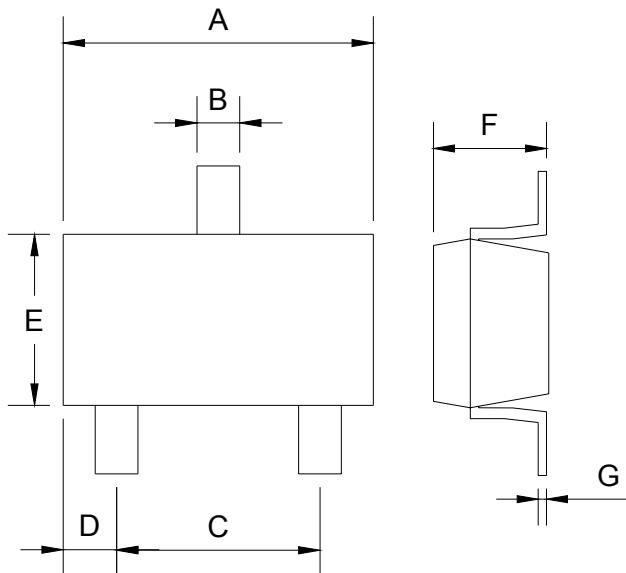

SOT-23 DIMENSION				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	2.88	2.91	0.113	0.115
B	0.39	0.42	0.015	0.017
C	1.78	2.03	0.070	0.080
D	0.51	0.61	0.020	0.024
E	1.59	1.66	0.063	0.065
F	1.04	1.08	0.041	0.043
G	0.07	0.09	0.003	0.004

SOT-323 Mechanical Drawing

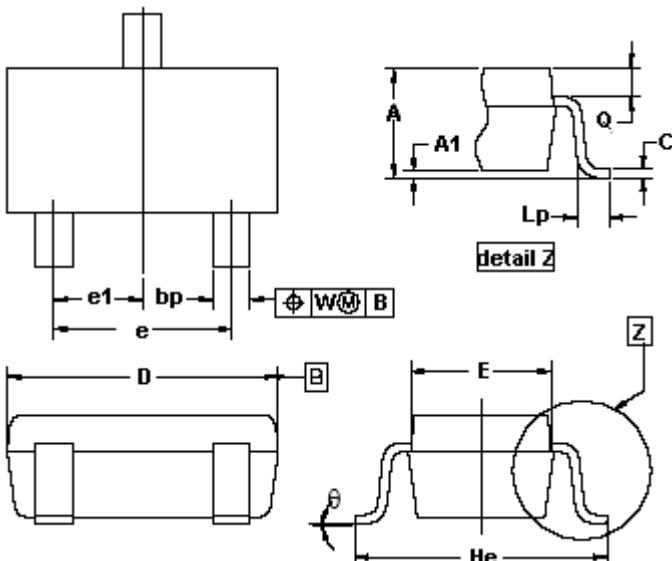

SOT-323 DIMENSION				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	0.80	1.10	0.0315	0.0433
A1	--	0.10	--	0.0039
bp	0.30	0.40	0.0118	0.0157
C	0.10	0.25	0.0039	0.0098
D	1.80	2.20	0.0709	0.0866
E	1.15	1.35	0.0453	0.0531
e	1.30	--	0.0512	--
e1	0.65	--	0.0256	--
He	2.00	2.20	0.0787	0.0866
Lp	0.15	0.45	0.0059	0.0177
Q	0.13	0.23	0.0051	0.0091
W	0.20	--	0.0079	--
Θ	10°	--	10°	--