

# MN676011NPS

## NTSC Color Camera Synchronizing Signal Generator LSI

### ■ Overview

The MN676011NPS is a CMOS LSI that generates NTSC color camera synchronizing signals as defined by the EIA RS-170A standard.

It features a built-in  $4f_{SC}$  (14.31818 MHz) crystal oscillator circuit and divides that frequency to generate the horizontal synchronizing signal  $f_H$  (15.7 kHz), the vertical synchronizing signal  $f_V$  (60 Hz), and the composite synchronizing signal.

It also divides the  $4f_{SC}$  clock signal frequency by four to generate the color subcarrier frequency signals SC1 and SC2 and the burst signal gated with the burst flag (BF) pulse.

It includes a vertical reset (VR) input pin for resetting the leading edge of the vertical synchronizing pulse (VP) with the falling edge of the input signal. It also includes separate clock input pins for the color subcarrier frequency signal circuits and the synchronizing signal circuits to permit synchronization with such external synchronizing LSIs as the MN6761S.


### ■ Features

- Power-saving CMOS synchronizing signal generator (conformed to EIA RS-170A standard)
- Built-in 14.31818 MHz clock generator
- 12 signal outputs including horizontal and vertical synchronizing signals and color subcarrier frequency signals (The vertical synchronizing signal is available as the VP signal output.)
- Pins for switching BLK signal pulse widths


### ■ Applications

- Color video cameras

### ■ Pin Assignment

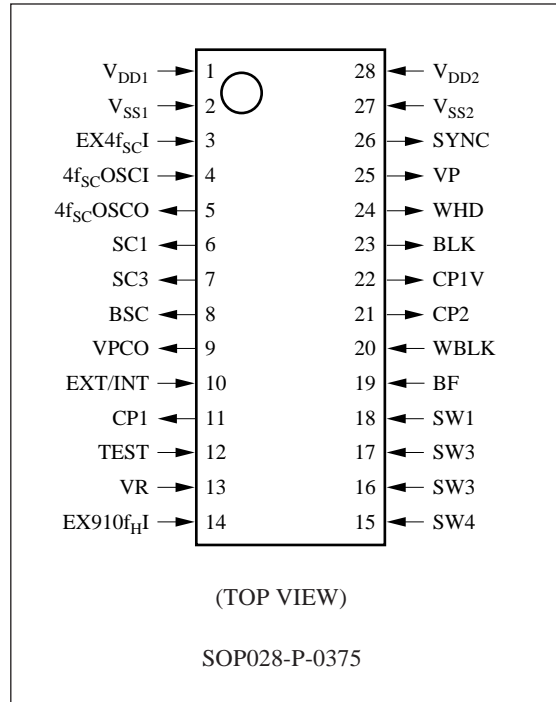

■ Block Diagram

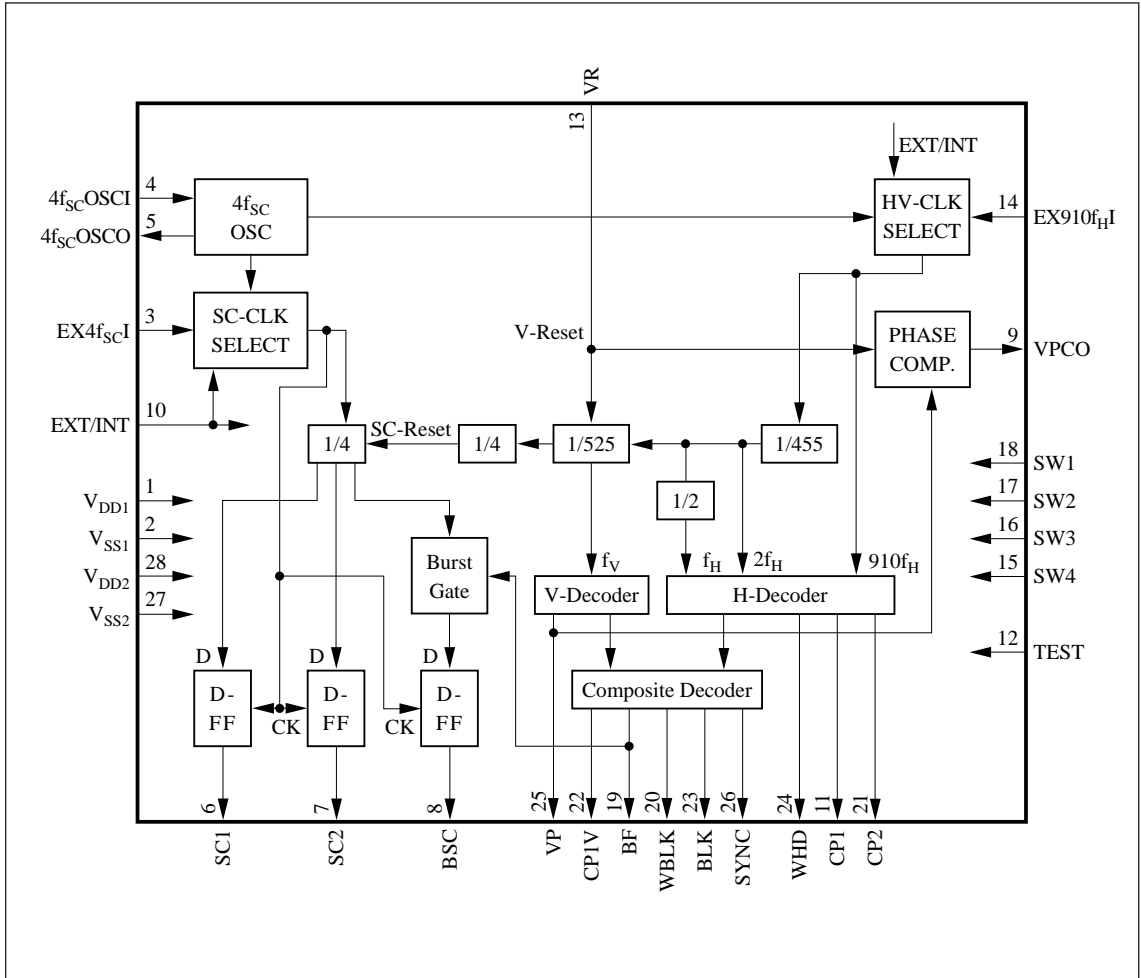

■ Pin Descriptions

Pin No.	Symbol	Pin Name	Function Description
1	V <sub>DD1</sub>	Power supply	"H" level power supply (Connect this pin to +5.0 ±0.5 V.) Power supply for color subcarrier frequency signal circuits
2	V <sub>SS1</sub>	Power supply	"L" level power supply (Connect this pin to 0 V.) Power supply for color subcarrier frequency signal circuits
28	V <sub>DD2</sub>	Power supply	"H" level power supply (Connect this pin to +5.0 ±0.5 V.) Power supply for horizontal and vertical synchronizing signals
27	V <sub>SS2</sub>	Power supply	"L" level power supply (Connect this pin to 0 V.) Power supply for horizontal and vertical synchronizing signals


■ Pin Descriptions (continued)

Pin No.	Symbol	Pin Name	Function Description															
4	$4f_{SC}OSCI$	Crystal oscillator input	Connect these pins to a 14.31818-MHz crystal oscillator through capacitors appropriate for $V_{SS1}$ . "L" level input to the EXT/INT pin (which includes a built-in feedback resistor) produces oscillation; "H" level input stops it.															
5	$4f_{SC}OSCO$	Crystal oscillator output																
3	$EX4f_{SC}I$	External clock input	Color subcarrier frequency ( $4f_{SC}$ ) input "H" level input to the EXT/INT pin enables external clock input. If this pin is not used, keep it at "L" level.															
14	$EX910f_H I$	External clock input	External $910f_H$ (14.31818 MHz) input for horizontal and vertical synchronizing signals "H" level input to the EXT/INT pin enables external clock input. If this pin is not used, keep it at "L" level.															
10	EXT/INT	External/internal synchronization switch input	This pin switches the chip between external and internal synchronization modes. "H" level input produces external synchronization; "L" level, internal synchronization. Incorporating pull-down resistor.															
13	VR	Vertical reset input	Falling edge input resets the leading edge of the vertical synchronizing signal (VP). The pin includes a built-in pull-up resistor.															
12	TEST	Test input	Test input Keep this pin at "H" level. The pin includes a built-in pull-up resistor.															
9	VPCO	Phase comparator output	This pin gives the results of comparing the phases of the falling edge of the VR input and rising edge of the VP output. The output is at "H" level when the VR leads the VP and is at "L" level when the VR trails the VP.															
18	SW1	H-BLK pulse width selection	<p>These pins control the widths of H-BLK and V-BLK pulses.</p> <table border="1"> <thead> <tr> <th>SW1</th> <th>SW2</th> <th>H-BLK (<math>\mu</math>s)</th> </tr> </thead> <tbody> <tr> <td>L</td> <td>L</td> <td>10.69</td> </tr> <tr> <td>H</td> <td>L</td> <td>10.82</td> </tr> <tr> <td>L</td> <td>H</td> <td>10.97</td> </tr> <tr> <td>H</td> <td>H</td> <td>11.10</td> </tr> </tbody> </table>	SW1	SW2	H-BLK ( $\mu$ s)	L	L	10.69	H	L	10.82	L	H	10.97	H	H	11.10
SW1	SW2			H-BLK ( $\mu$ s)														
L	L	10.69																
H	L	10.82																
L	H	10.97																
H	H	11.10																
17	SW2																	
16	SW3	V-BLK pulse width selection	<table border="1"> <thead> <tr> <th>SW3</th> <th>SW4</th> <th>V-BLK (H)</th> </tr> </thead> <tbody> <tr> <td>L</td> <td>L</td> <td>19</td> </tr> <tr> <td>H</td> <td>L</td> <td>20</td> </tr> <tr> <td>L</td> <td>H</td> <td>21</td> </tr> <tr> <td>H</td> <td>H</td> <td>21</td> </tr> </tbody> </table>	SW3	SW4	V-BLK (H)	L	L	19	H	L	20	L	H	21	H	H	21
SW3	SW4			V-BLK (H)														
L	L	19																
H	L	20																
L	H	21																
H	H	21																
15	SW4																	

■ Pin Descriptions (continued)


Pin No.	Symbol	Pin Name	Function Description
6	SC1	$f_{SC}$ (R-Y) output	Color subcarrier frequency signal (3.58 MHz) formed by dividing the crystal oscillator signal ( $4f_{SC}$ ) by four.
7	SC2	$f_{SC}$ (B-Y) output	Color subcarrier frequency signal (3.58 MHz) formed by dividing the crystal oscillator signal ( $4f_{SC}$ ) by four. This signal lags SC1 by 90°.
8	BSC	Burst output	Burst output signal If SC1 is the 180° signal, BSC is the 0° signal.
26	SYNC	Composite synchronizing signal output	Composite synchronizing signal
25	VP	Vertical synchronizing signal output	Vertical synchronizing signal output (width: 3H)
24	WHD	Wide HD output	Wide HD signal Preblanking signal with pulse width of 9.71 $\mu$ s
23	BLK	Composite blanking signal output	Composite blanking signal See the entries for SW1–SW4 for the pulse width.
22	CP1V	Composite clamp pulse output	Composite pulse for black level playback
21	CP2	Clamp pulse output	Clamp pulses for luminance and color difference signals Horizontal deflection start pulses
20	WBLK	Composite wide blanking output	Composite wide blanking signal This signal provides a horizontal blanking interval of 26.89 $\mu$ s and a vertical blanking interval of 134.5H
19	BF	Burst flag output	Gate signal for color subcarrier frequencies The pulse width is 2.51 $\mu$ s with the vertical interval (9H) dropped out.
11	CP1	Clamp pulse output	Pulse for black level playback

■ H Decoder Pulse Timing Diagram

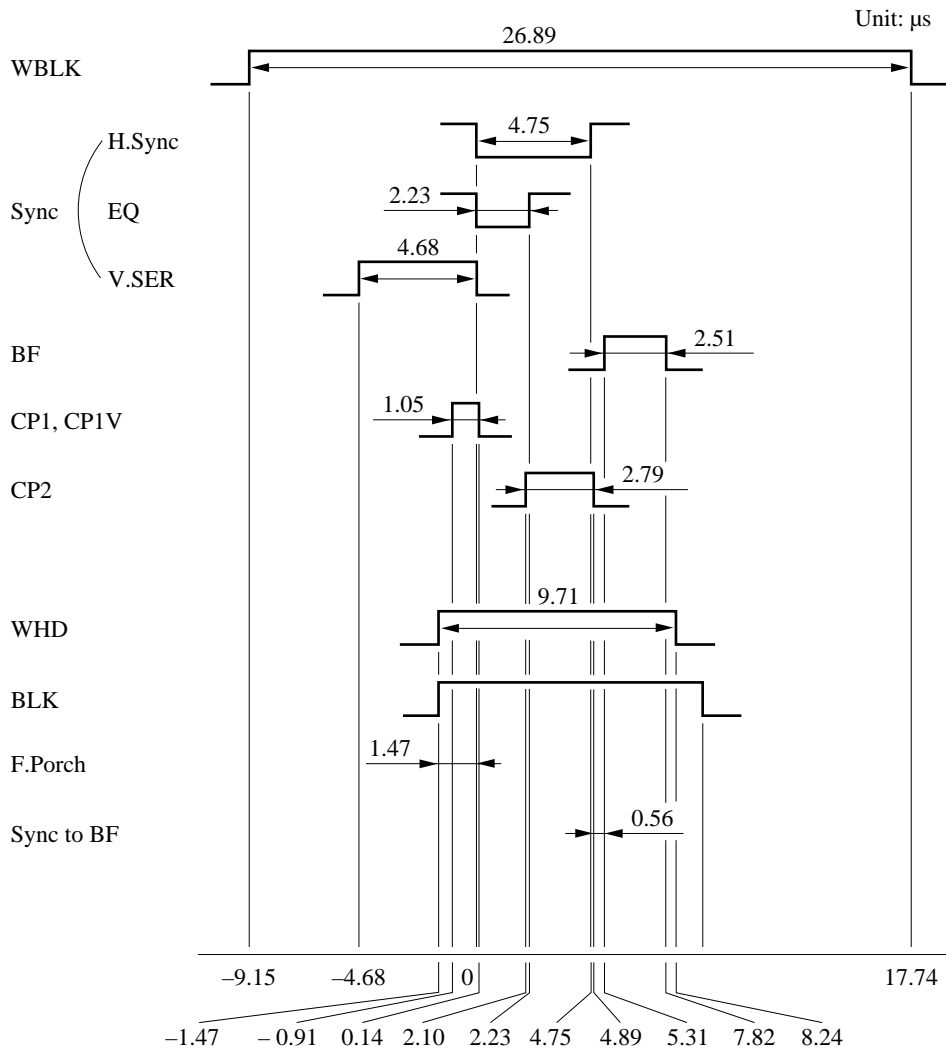


SW1	SW2	H-BLK ( $\mu\text{s}$ )
L	L	10.69
H	L	10.82
L	H	10.97
H	H	11.10

■ Pulse Timing Diagram for Composite and Vertical Synchronizing Signals

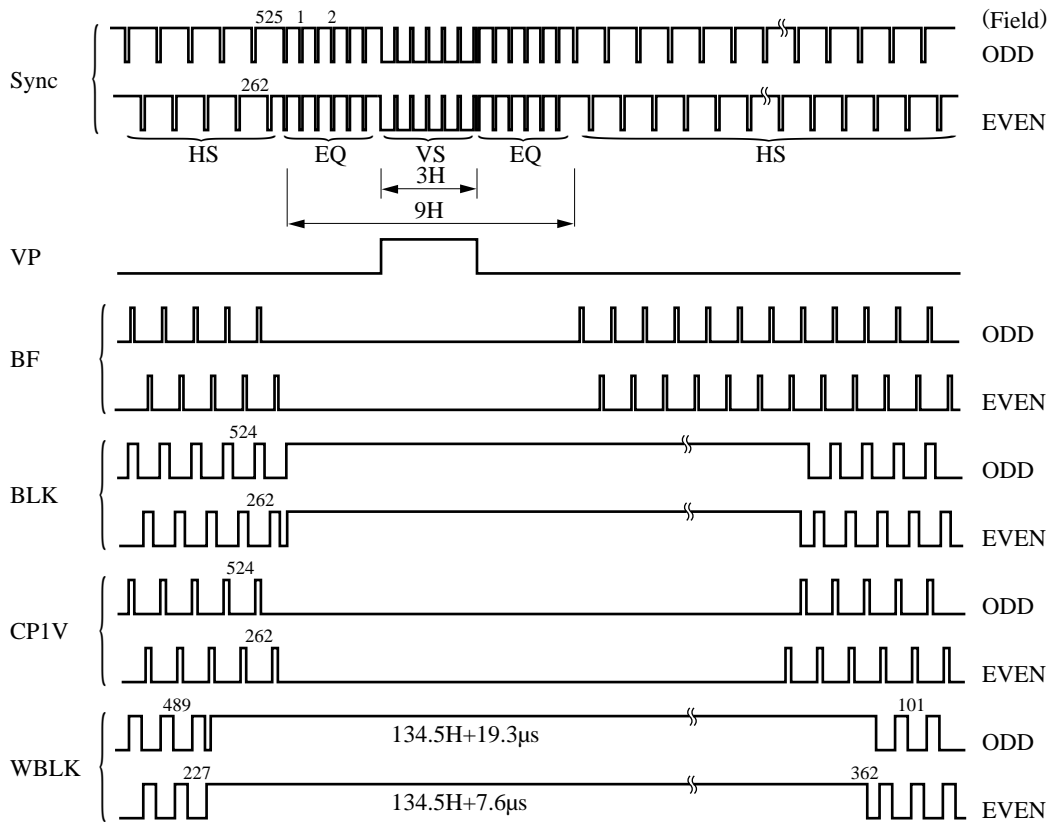


SW3	SW4	V-BLK (H)
L	L	19
H	L	20
L	H	21
H	H	21

■ Application Circuit Example

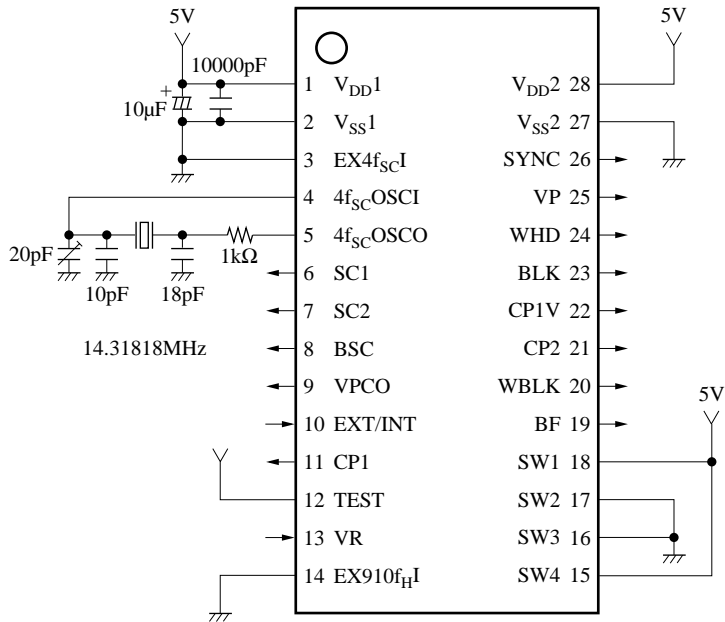

■ Package Dimensions (Unit: mm)

SOP028-P-0375

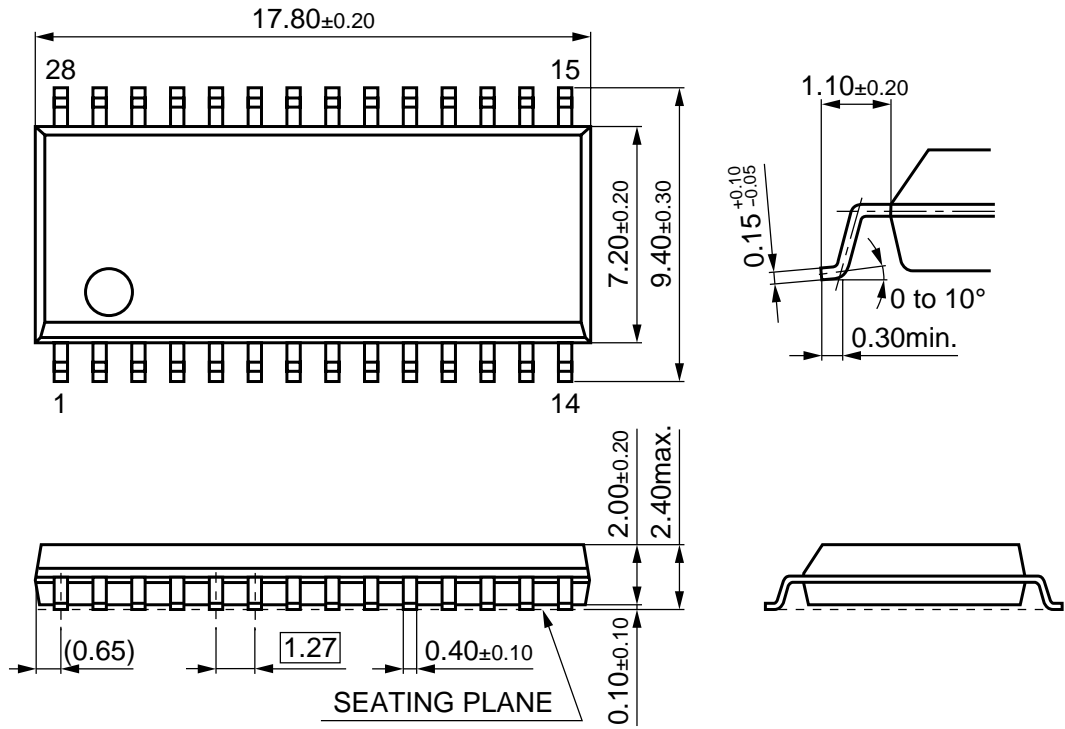



## Request for your special attention and precautions in using the technical information and semiconductors described in this material

- (1) An export permit needs to be obtained from the competent authorities of the Japanese Government if any of the products or technologies described in this material and controlled under the "Foreign Exchange and Foreign Trade Law" is to be exported or taken out of Japan.
- (2) The technical information described in this material is limited to showing representative characteristics and applied circuit examples of the products. It does not constitute the warranting of industrial property, the granting of relative rights, or the granting of any license.
- (3) The products described in this material are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).  
Consult our sales staff in advance for information on the following applications:
  - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
  - Any applications other than the standard applications intended.
- (4) The products and product specifications described in this material are subject to change without notice for reasons of modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the guaranteed values, in particular those of maximum rating, the range of operating power supply voltage and heat radiation characteristics. Otherwise, we will not be liable for any defect which may arise later in your equipment.  
Even when the products are used within the guaranteed values, redundant design is recommended, so that such equipment may not violate relevant laws or regulations because of the function of our products.
- (6) When using products for which dry packing is required, observe the conditions (including shelf life and after-unpacking standby time) agreed upon when specification sheets are individually exchanged.
- (7) No part of this material may be reprinted or reproduced by any means without written permission from our company.

## Please read the following notes before using the datasheets

- A. These materials are intended as a reference to assist customers with the selection of Panasonic semiconductor products best suited to their applications.  
Due to modification or other reasons, any information contained in this material, such as available product types, technical data, and so on, is subject to change without notice.  
Customers are advised to contact our semiconductor sales office and obtain the latest information before starting precise technical research and/or purchasing activities.
- B. Panasonic is endeavoring to continually improve the quality and reliability of these materials but there is always the possibility that further rectifications will be required in the future. Therefore, Panasonic will not assume any liability for any damages arising from any errors etc. that may appear in this material.
- C. These materials are solely intended for a customer's individual use.  
Therefore, without the prior written approval of Panasonic, any other use such as reproducing, selling, or distributing this material to a third party, via the Internet or in any other way, is prohibited.