

## The RF Line NPN Silicon Low Noise Transistors

**MRF959T1**

**I<sub>Cmax</sub> = 100 mA  
LOW NOISE  
TRANSISTORS**

Motorola's MRF959 is a high performance silicon NPN transistor designed for use in high gain, low noise small-signal amplifiers. The MRF959 is well suited for low voltage applications. This device features a 9 GHz DC current gain-bandwidth product with excellent linearity.

- Low Noise Figure,  $NF_{min} = 1.3$  dB (Typ) @ 1 GHz @ 5 mA
- High Current Gain-Bandwidth Product,  $f_t = 9$  GHz @ 30 mA
- Maximum Available Gain,  $MAG = 17$  dB (Typ) @ 1 GHz @ 15 mA
- Output Third Order Intercept,  $OIP_3 = +30$  dBm @ 1 GHz @ 30 mA
- Fully Ion-Implanted with Gold Metallization and Nitride Passivation
- Available in Tape and Reel Packaging Options:  
T1 Suffix = 3,000 Units per Reel



**CASE 463-01, STYLE 1  
(SC-90)**

### MAXIMUM RATINGS

| Rating   | Symbol          | Value       | Unit                          |
|--|-----------------|-------------|-------------------------------|
| Collector-Emitter Voltage  | $V_{CEO}$       | 10          | Vdc                           |
| Collector-Base Voltage   | $V_{CBO}$       | 20          | Vdc                           |
| Emitter-Base Voltage   | $V_{EBO}$       | 1.5         | Vdc                           |
| Power Dissipation (1) $T_C = 75^\circ\text{C}$<br>Derate linearly above $T_C = 75^\circ\text{C}$ @ | $P_{Dmax}$      | 0.150<br>2  | Watts<br>mW/ $^\circ\text{C}$ |
| Collector Current — Continuous (2)   | $I_C$           | 100         | mA                            |
| Maximum Junction Temperature   | $T_{Jmax}$      | 150         | $^\circ\text{C}$              |
| Storage Temperature  | $T_{stg}$       | -55 to +150 | $^\circ\text{C}$              |
| Thermal Resistance, Junction to Case   | $R_{\theta JC}$ | 500         | $^\circ\text{C}/\text{W}$     |

### DEVICE MARKINGS

MRF959T1 = V1

(1) To calculate the junction temperature use  $T_J = (P_D \times R_{\theta JC}) + T_C$ . The case temperature is measured on collector lead adjacent to the package body.

(2)  $I_C$  — Continuous (MTBF > 10 years).

**ELECTRICAL CHARACTERISTICS** ( $T_A = 25^\circ\text{C}$  unless otherwise noted)

| Characteristic   | Symbol        | Min | Typ | Max | Unit          |
|--|---------------|-----|-----|-----|---------------|
| <b>OFF CHARACTERISTICS (3)</b>   |               |     |     |     |               |
| Collector–Emitter Breakdown Voltage<br>( $I_C = 0.1\text{ mA}$ , $I_B = 0$ ) | $V_{(BR)CEO}$ | 10  | 13  | —   | Vdc           |
| Collector–Base Breakdown Voltage<br>( $I_C = 0.1\text{ mA}$ , $I_E = 0$ )    | $V_{(BR)CBO}$ | 20  | 25  | —   | Vdc           |
| Emitter Cutoff Current<br>( $V_{EB} = 1\text{ V}$ , $I_C = 0$ )              | $I_{EBO}$     | —   | —   | 0.1 | $\mu\text{A}$ |
| Collector Cutoff Current<br>( $V_{CB} = 10\text{ V}$ , $I_E = 0$ )           | $I_{CBO}$     | —   | —   | 0.1 | $\mu\text{A}$ |

**ON CHARACTERISTICS (3)**

|   |          |    |   |     |   |
|---|----------|----|---|-----|---|
| DC Current Gain ( $V_{CE} = 6\text{ V}$ , $I_C = 5\text{ mA}$ ) | $h_{FE}$ | 75 | — | 150 | — |
|---|----------|----|---|-----|---|

**DYNAMIC CHARACTERISTICS**

|  |          |        |              |        |     |
|--|----------|--------|--------------|--------|-----|
| Collector–Base Capacitance<br>( $V_{CB} = 1\text{ V}$ , $I_E = 0$ , $f = 1\text{ MHz}$ )<br>( $V_{CB} = 5\text{ V}$ , $I_E = 0$ , $f = 1\text{ MHz}$ ) | $C_{cb}$ | —<br>— | 0.63<br>0.44 | —<br>— | pF  |
| Current Gain — Bandwidth Product<br>( $V_{CE} = 6\text{ V}$ , $I_C = 30\text{ mA}$ , $f = 1\text{ GHz}$ )  | $f_T$    | —      | 9            | —      | GHz |

**PERFORMANCE CHARACTERISTICS**

| Conditions   | Symbol       | Min    | Typ        | Max    | Unit     |
|--|--------------|--------|------------|--------|----------|
| Insertion Gain<br>( $V_{CE} = 1\text{ V}$ , $I_C = 1\text{ mA}$ , $f = 1\text{ GHz}$ )<br>( $V_{CE} = 6\text{ V}$ , $I_C = 15\text{ mA}$ , $f = 1\text{ GHz}$ )  | $ S_{21} ^2$ | —<br>— | 4<br>14    | —<br>— | dB       |
| Maximum Unilateral Gain (4)<br>( $V_{CE} = 1\text{ V}$ , $I_C = 1\text{ mA}$ , $f = 1\text{ GHz}$ )<br>( $V_{CE} = 6\text{ V}$ , $I_C = 15\text{ mA}$ , $f = 1\text{ GHz}$ )                           | $G_{Umax}$   | —<br>— | 9<br>15    | —<br>— | dB       |
| Maximum Stable Gain and/or Maximum Available Gain (5)<br>( $V_{CE} = 1\text{ V}$ , $I_C = 1\text{ mA}$ , $f = 1\text{ GHz}$ )<br>( $V_{CE} = 6\text{ V}$ , $I_C = 15\text{ mA}$ , $f = 1\text{ GHz}$ ) | MSG<br>MAG   | —<br>— | 10<br>17   | —<br>— | dB       |
| Noise Figure — Minimum<br>( $V_{CE} = 1\text{ V}$ , $I_C = 1\text{ mA}$ , $f = 1\text{ GHz}$ )<br>( $V_{CE} = 6\text{ V}$ , $I_C = 5\text{ mA}$ , $f = 1\text{ GHz}$ )                                 | $NF_{min}$   | —<br>— | 1.6<br>1.3 | —<br>— | dB       |
| Noise Resistance<br>( $V_{CE} = 1\text{ V}$ , $I_C = 1\text{ mA}$ , $f = 1\text{ GHz}$ )<br>( $V_{CE} = 6\text{ V}$ , $I_C = 5\text{ mA}$ , $f = 1\text{ GHz}$ )                                       | $R_N$        | —<br>— | 14<br>9    | —<br>— | $\Omega$ |
| Associated Gain at Minimum NF<br>( $V_{CE} = 1\text{ V}$ , $I_C = 1\text{ mA}$ , $f = 1\text{ GHz}$ )<br>( $V_{CE} = 6\text{ V}$ , $I_C = 5\text{ mA}$ , $f = 1\text{ GHz}$ )                          | $G_{NF}$     | —<br>— | 8<br>13    | —<br>— | dB       |
| Output Power at 1 dB Gain Compression (6)<br>( $V_{CE} = 6\text{ V}$ , $I_C = 15\text{ mA}$ , $f = 1\text{ GHz}$ )   | $P_{1dB}$    | —      | +12        | —      | dBm      |
| Output Third Order Intercept (6)<br>( $V_{CE} = 6\text{ V}$ , $I_C = 15\text{ mA}$ , $f = 1\text{ GHz}$ )  | $OIP_3$      | —      | +26        | —      | dBm      |

(3) Pulse width  $\leq 300\ \mu\text{s}$ , duty cycle  $\leq 2\%$  pulsed.


(4) Maximum unilateral gain is  $G_{Umax} = \frac{|S_{21}|^2}{(1-|S_{11}|^2)(1-|S_{22}|^2)}$

(5) Maximum available gain and maximum stable gain are defined by the K factor as follows:  $MAG = \frac{|S_{21}|}{|S_{12}|} (K \pm \sqrt{K^2 - 1})$ , if  $K > 1$


(6)  $Z_{in} = 50\ \Omega$  and  $Z_{out}$  matched for small signal maximum gain.

$$MSG = \frac{|S_{21}|}{|S_{12}|}, \text{ if } K < 1$$


## TYPICAL CHARACTERISTICS

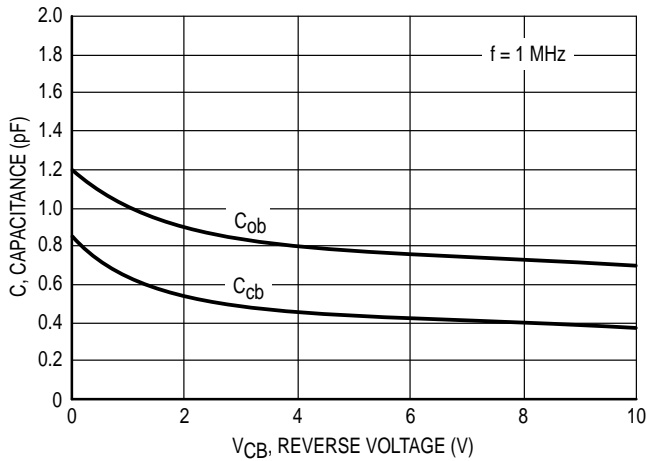


**Figure 1. Capacitance versus Voltage**

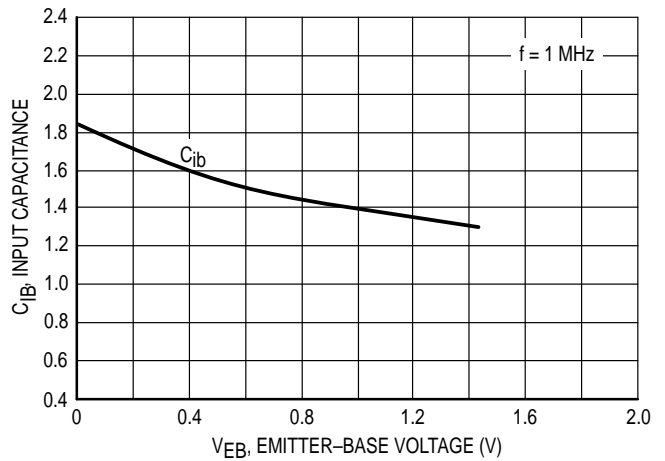


**Figure 2. Input Capacitance versus Voltage**

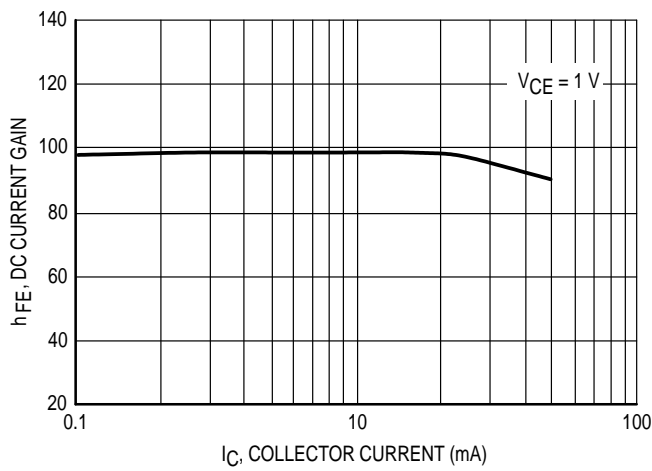

**Figure 3. DC Current Gain versus Collector Current**

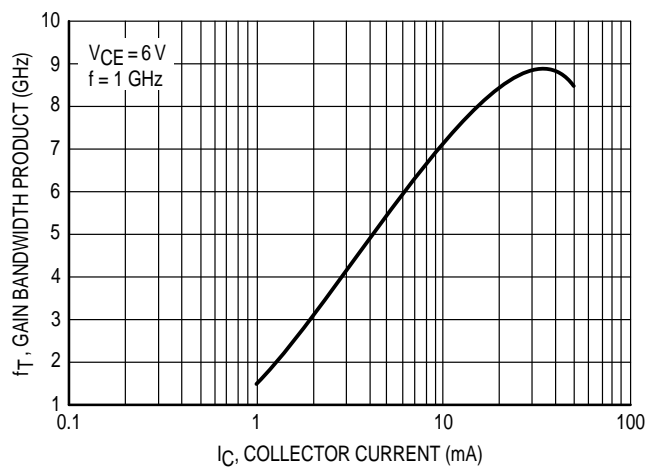


**Figure 4. Gain-Bandwidth Product versus Collector Current**

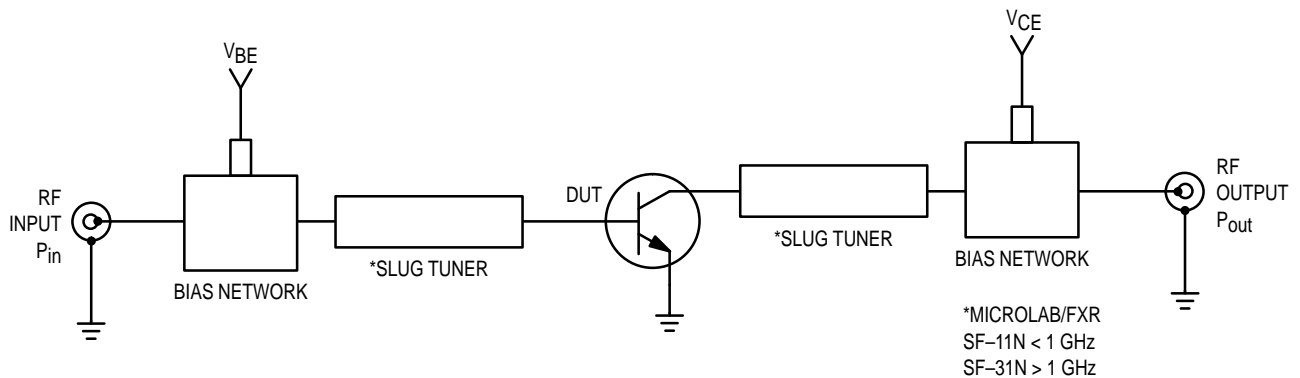


**Figure 5. Functional Circuit Schematic**


## TYPICAL CHARACTERISTICS

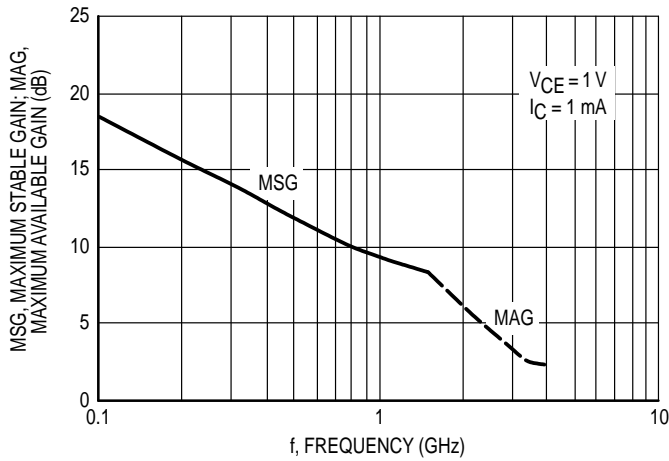


**Figure 6. Maximum Stable/Available Gain versus Frequency**

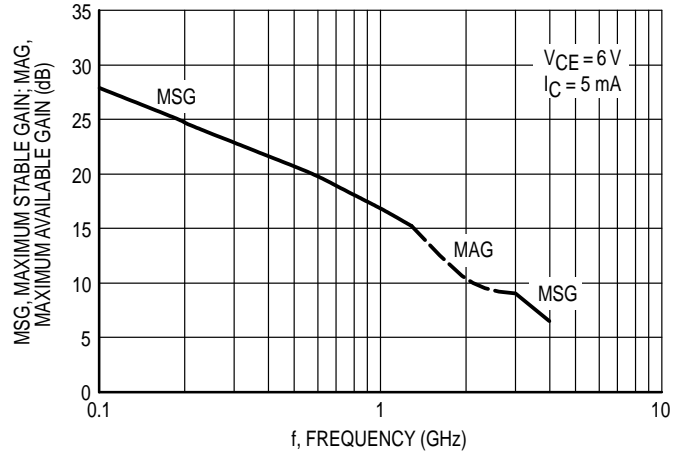


**Figure 7. Maximum Stable/Available Gain versus Frequency**

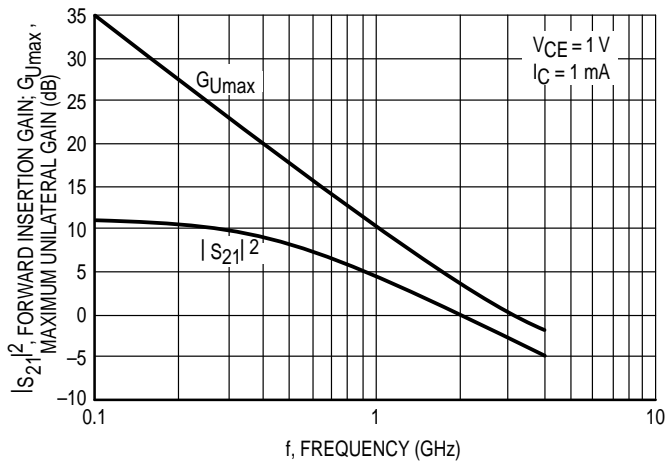


**Figure 8. Maximum Unilateral Gain and Forward Insertion Gain versus Frequency**

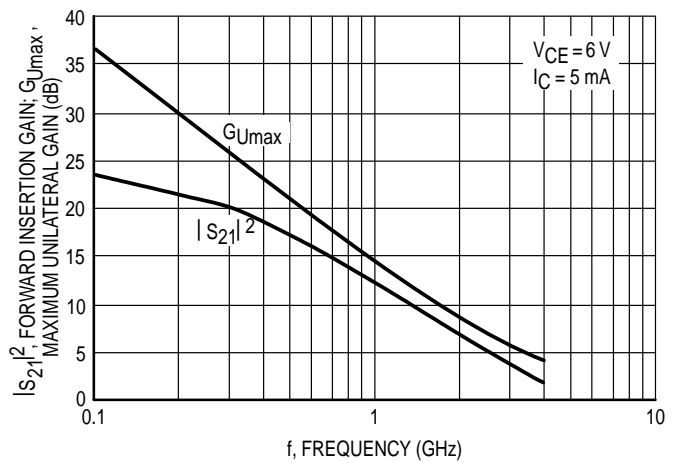

**Figure 9. Maximum Unilateral Gain and Forward Insertion Gain versus Frequency**

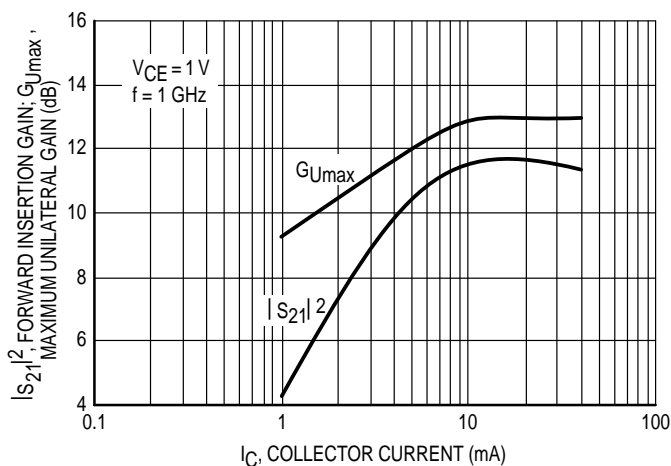


**Figure 10. Maximum Unilateral Gain and Forward Insertion Gain versus Collector Current**

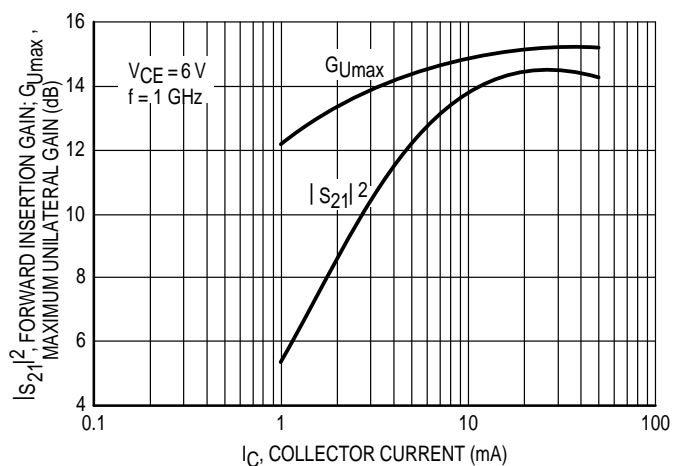


**Figure 11. Maximum Unilateral Gain and Forward Insertion Gain versus Collector Current**


## TYPICAL CHARACTERISTICS

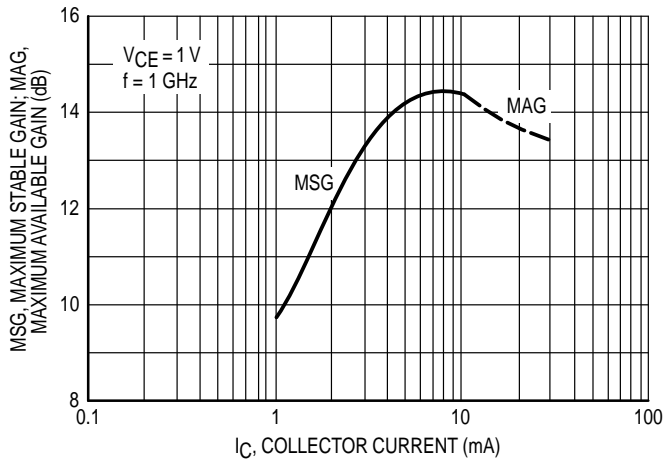


**Figure 12. Maximum Stable/Available Gain versus Collector Current**

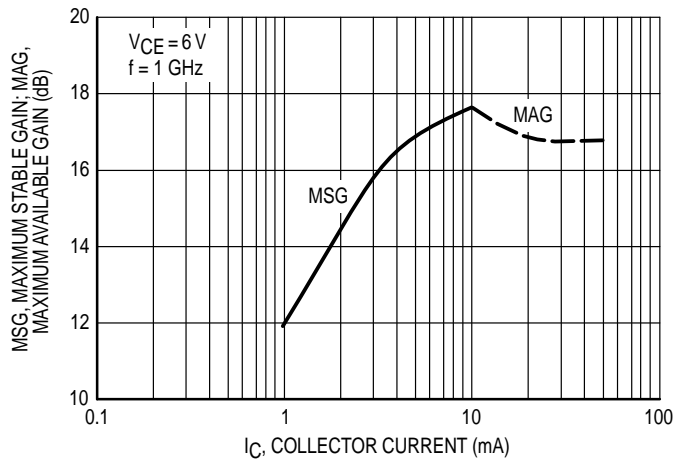


**Figure 13. Maximum Stable/Available Gain versus Collector Current**

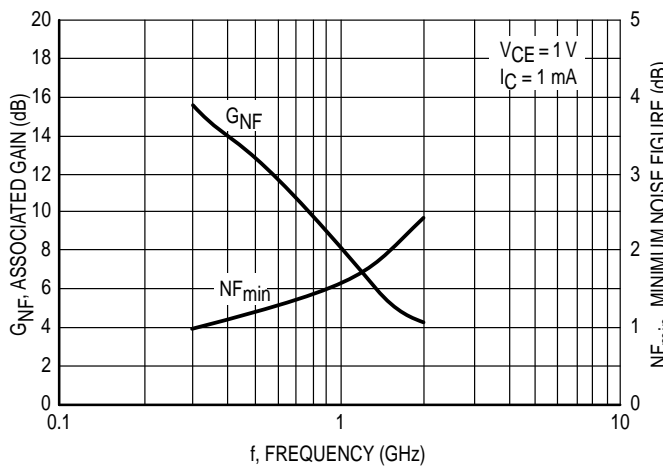


**Figure 14. Minimum Noise Figure and Associated Gain versus Frequency**

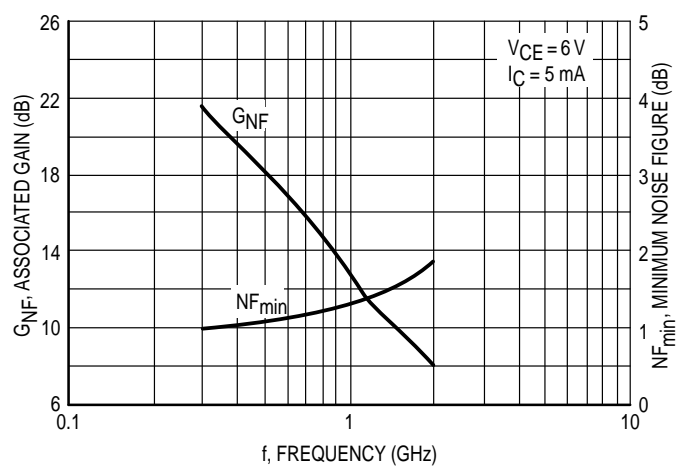

**Figure 15. Minimum Noise Figure and Associated Gain versus Frequency**

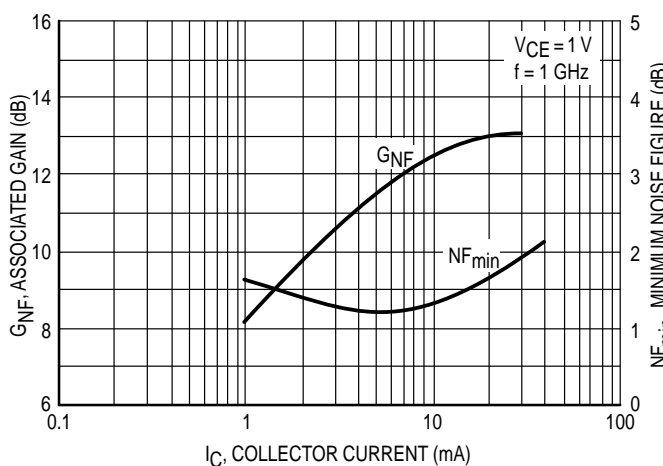


**Figure 16. Minimum Noise Figure and Associated Gain versus Collector Current**

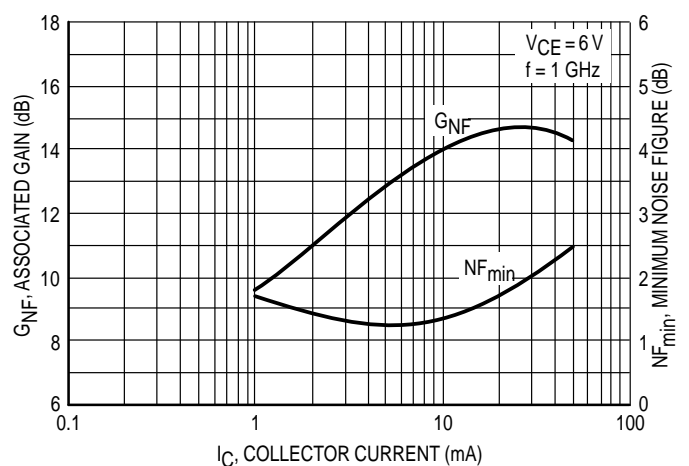

**Figure 17. Minimum Noise Figure and Associated Gain versus Collector Current**

## TYPICAL CHARACTERISTICS

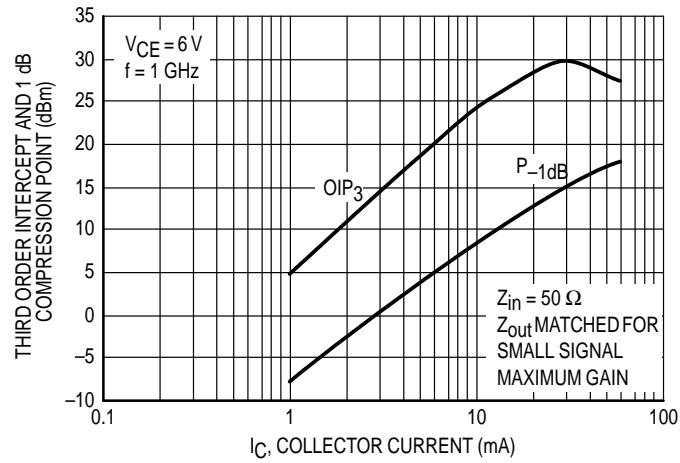

**Figure 18. Output Third Order Intercept and Output Power at 1 dB Gain Compression versus Collector Current**

$V_{CE} = 1\text{ V}$   
 $I_C = 1\text{ mA}$

| f (GHz) | NF OPT  | $\Gamma_O$                | $R_N$ | K    |
|---------|---------|---------------------------|-------|------|
| 1.0     | 1.61 dB | $0.53 \angle 111.4^\circ$ | 14    | 0.53 |

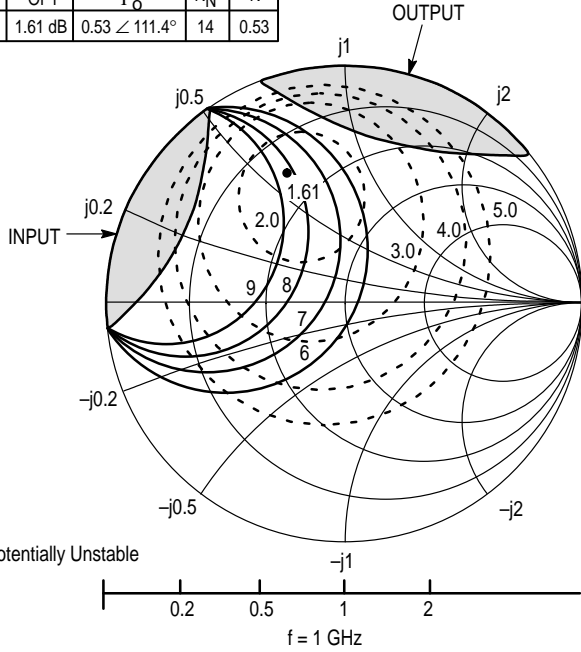


Figure 19. MRF959T1 Series Constant Gain and Noise Figure Contours

$V_{CE} = 1\text{ V}$   
 $I_C = 1\text{ mA}$

| f (GHz) | NF OPT  | $\Gamma_O$                | $R_N$ | K    |
|---------|---------|---------------------------|-------|------|
| 2.0     | 2.39 dB | $0.64 \angle 174.6^\circ$ | 4     | 1.12 |

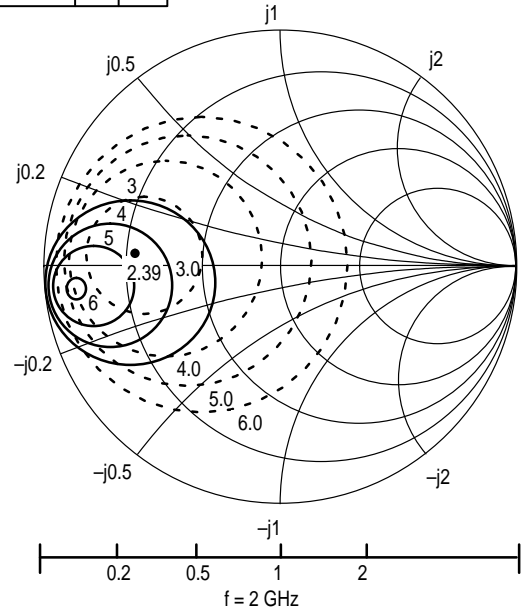


Figure 20. MRF959T1 Series Constant Gain and Noise Figure Contours

$V_{CE} = 3\text{ V}$   
 $I_C = 3\text{ mA}$

| f (GHz) | NF OPT  | $\Gamma_O$                | $R_N$ | K    |
|---------|---------|---------------------------|-------|------|
| 1.0     | 1.29 dB | $0.37 \angle 108.0^\circ$ | 9     | 0.73 |

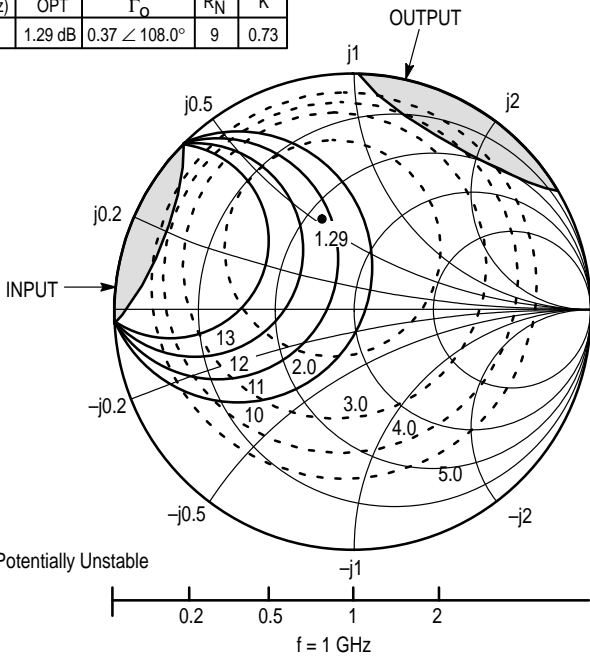


Figure 21. MRF959T1 Series Constant Gain and Noise Figure Contours

$V_{CE} = 6\text{ V}$   
 $I_C = 5\text{ mA}$

| f (GHz) | NF OPT | $\Gamma_O$                | $R_N$ | K    |
|---------|--------|---------------------------|-------|------|
| 1.0     | 1.3 dB | $0.31 \angle 104.0^\circ$ | 8.5   | 0.88 |

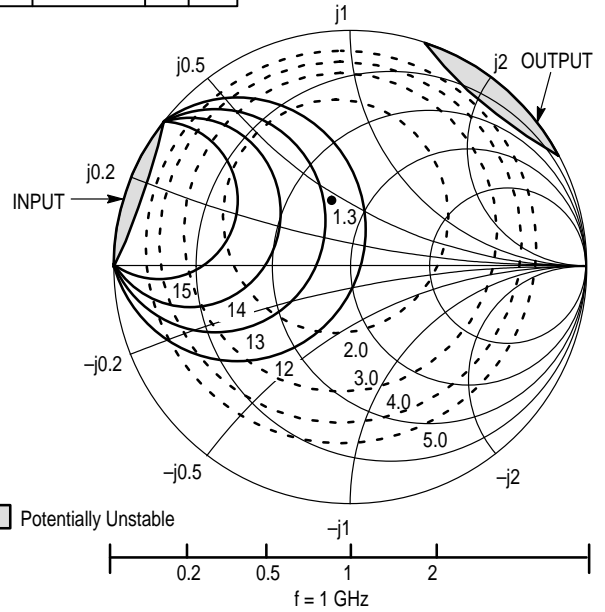


Figure 22. MRF959T1 Series Constant Gain and Noise Figure Contours

| V <sub>CE</sub><br>(Vdc) | I <sub>C</sub><br>(mA) | f<br>(GHz) | S <sub>11</sub> |       | S <sub>21</sub> |       | S <sub>12</sub> |       | S <sub>22</sub> |       |      |
|--------------------------|------------------------|------------|-----------------|-------|-----------------|-------|-----------------|-------|-----------------|-------|------|
|                          |                        |            | S <sub>11</sub> | ∠φ    | S <sub>21</sub> | ∠φ    | S <sub>12</sub> | ∠φ    | S <sub>22</sub> | ∠φ    |      |
| 1.0                      | 1.0                    | 0.1        | 0.946           | -21   | 3.53            | 165   | 0.047           | 78    | 0.980           | -9    |      |
|                          |                        | 0.3        | 0.888           | -60   | 3.08            | 139   | 0.122           | 56    | 0.889           | -24   |      |
|                          |                        | 0.5        | 0.801           | -89   | 2.49            | 118   | 0.160           | 41    | 0.778           | -32   |      |
|                          |                        | 0.7        | 0.748           | -111  | 2.06            | 102   | 0.177           | 30    | 0.698           | -39   |      |
|                          |                        | 0.9        | 0.711           | -128  | 1.74            | 90    | 0.183           | 24    | 0.646           | -45   |      |
|                          |                        | 1.0        | 0.700           | -135  | 1.62            | 85    | 0.182           | 21    | 0.629           | -47   |      |
|                          |                        | 1.3        | 0.688           | -153  | 1.33            | 72    | 0.174           | 17    | 0.591           | -54   |      |
|                          |                        | 1.5        | 0.682           | -163  | 1.18            | 64    | 0.166           | 15    | 0.579           | -59   |      |
|                          |                        | 2.0        | 0.680           | 179   | 0.94            | 49    | 0.141           | 21    | 0.571           | -73   |      |
|                          |                        | 2.5        | 0.702           | 163   | 0.77            | 37    | 0.135           | 39    | 0.568           | -90   |      |
|                          |                        | 3.0        | 0.713           | 152   | 0.67            | 30    | 0.172           | 56    | 0.582           | -104  |      |
|                          |                        | 3.5        | 0.712           | 138   | 0.59            | 26    | 0.235           | 62    | 0.596           | -118  |      |
|                          |                        | 4.0        | 0.727           | 127   | 0.55            | 25    | 0.312           | 60    | 0.603           | -132  |      |
|                          |                        | 4.5        | 0.710           | 117   | 0.54            | 24    | 0.393           | 55    | 0.602           | -145  |      |
|                          |                        | 5.0        | 0.705           | 108   | 0.55            | 23    | 0.463           | 48    | 0.598           | -160  |      |
|                          | 3.0                    | 3.0        | 0.1             | 0.850 | -34             | 9.36  | 158             | 0.044 | 72              | 0.934 | -18  |
|                          |                        |            | 0.3             | 0.736 | -86             | 6.84  | 126             | 0.096 | 49              | 0.707 | -42  |
|                          |                        |            | 0.5             | 0.640 | -117            | 4.86  | 107             | 0.115 | 39              | 0.532 | -51  |
|                          |                        |            | 0.7             | 0.606 | -137            | 3.74  | 95              | 0.123 | 35              | 0.436 | -56  |
|                          |                        |            | 0.9             | 0.584 | -151            | 3.01  | 86              | 0.129 | 35              | 0.385 | -61  |
|                          |                        |            | 1.0             | 0.578 | -156            | 2.76  | 82              | 0.132 | 35              | 0.370 | -63  |
|                          |                        |            | 1.3             | 0.581 | -170            | 2.20  | 72              | 0.140 | 37              | 0.331 | -68  |
|                          |                        |            | 1.5             | 0.580 | -178            | 1.93  | 66              | 0.146 | 39              | 0.321 | -73  |
|                          |                        |            | 2.0             | 0.581 | 168             | 1.51  | 53              | 0.167 | 45              | 0.315 | -85  |
|                          |                        |            | 2.5             | 0.611 | 156             | 1.25  | 42              | 0.195 | 50              | 0.316 | -101 |
|                          |                        |            | 3.0             | 0.619 | 147             | 1.09  | 33              | 0.237 | 53              | 0.336 | -113 |
|                          |                        |            | 3.5             | 0.621 | 135             | 0.96  | 26              | 0.285 | 53              | 0.358 | -124 |
|                          |                        |            | 4.0             | 0.645 | 127             | 0.87  | 20              | 0.338 | 51              | 0.381 | -136 |
|                          |                        |            | 4.5             | 0.638 | 118             | 0.81  | 16              | 0.397 | 47              | 0.400 | -147 |
|                          |                        |            | 5.0             | 0.65  | 110             | 0.758 | 12              | 0.45  | 43              | 0.415 | -160 |
| 5.0                      | 5.0                    | 0.1        | 0.650           | -53   | 23.10           | 147   | 0.025           | 68    | 0.844           | -27   |      |
|                          |                        | 0.3        | 0.535           | -114  | 13.19           | 114   | 0.048           | 53    | 0.513           | -50   |      |
|                          |                        | 0.5        | 0.474           | -140  | 8.59            | 100   | 0.060           | 54    | 0.359           | -52   |      |
|                          |                        | 0.7        | 0.465           | -156  | 6.34            | 91    | 0.072           | 57    | 0.290           | -53   |      |
|                          |                        | 0.9        | 0.459           | -166  | 5.01            | 84    | 0.084           | 59    | 0.256           | -55   |      |
|                          |                        | 1.0        | 0.456           | -170  | 4.55            | 81    | 0.091           | 60    | 0.247           | -56   |      |
|                          |                        | 1.3        | 0.467           | 180   | 3.56            | 74    | 0.112           | 62    | 0.220           | -58   |      |
|                          |                        | 1.5        | 0.469           | 174   | 3.11            | 69    | 0.126           | 62    | 0.212           | -61   |      |
|                          |                        | 2.0        | 0.473           | 163   | 2.40            | 59    | 0.162           | 62    | 0.203           | -71   |      |
|                          |                        | 2.5        | 0.509           | 152   | 1.96            | 49    | 0.198           | 61    | 0.189           | -86   |      |
|                          |                        | 3.0        | 0.514           | 146   | 1.69            | 41    | 0.237           | 58    | 0.202           | -95   |      |
|                          |                        | 3.5        | 0.518           | 135   | 1.49            | 33    | 0.276           | 56    | 0.214           | -105  |      |
|                          |                        | 4.0        | 0.544           | 129   | 1.35            | 26    | 0.316           | 53    | 0.230           | -115  |      |
|                          |                        | 4.5        | 0.543           | 122   | 1.24            | 20    | 0.358           | 49    | 0.247           | -123  |      |
|                          |                        | 5.0        | 0.568           | 114   | 1.14            | 14    | 0.398           | 45    | 0.255           | -136  |      |

Table 1. Common Emitter S-Parameters



| V <sub>CE</sub><br>(Vdc) | I <sub>C</sub><br>(mA) | f<br>(GHz) | S <sub>11</sub> |       | S <sub>21</sub> |       | S <sub>12</sub> |       | S <sub>22</sub> |      |
|--------------------------|------------------------|------------|-----------------|-------|-----------------|-------|-----------------|-------|-----------------|------|
|                          |                        |            | S <sub>11</sub> | ∠φ    | S <sub>21</sub> | ∠φ    | S <sub>12</sub> | ∠φ    | S <sub>22</sub> | ∠φ   |
| 3.0                      | 3.0                    | 0.1        | 0.866           | -28   | 9.71            | 161   | 0.031           | 75    | 0.954           | -13  |
|                          |                        | 0.3        | 0.760           | -76   | 7.57            | 131   | 0.072           | 54    | 0.782           | -31  |
|                          |                        | 0.5        | 0.653           | -106  | 5.59            | 113   | 0.089           | 43    | 0.630           | -37  |
|                          |                        | 0.7        | 0.607           | -127  | 4.37            | 100   | 0.097           | 39    | 0.541           | -40  |
|                          |                        | 0.9        | 0.578           | -142  | 3.55            | 91    | 0.102           | 38    | 0.491           | -43  |
|                          |                        | 1.0        | 0.569           | -148  | 3.26            | 87    | 0.105           | 38    | 0.475           | -45  |
|                          |                        | 1.3        | 0.566           | -163  | 2.60            | 77    | 0.111           | 41    | 0.437           | -48  |
|                          |                        | 1.5        | 0.562           | -172  | 2.28            | 71    | 0.116           | 43    | 0.425           | -51  |
|                          |                        | 2.0        | 0.561           | 173   | 1.77            | 58    | 0.131           | 50    | 0.411           | -61  |
|                          |                        | 2.5        | 0.588           | 160   | 1.45            | 47    | 0.155           | 56    | 0.396           | -73  |
|                          |                        | 3.0        | 0.598           | 151   | 1.26            | 38    | 0.190           | 60    | 0.406           | -84  |
|                          |                        | 3.5        | 0.603           | 139   | 1.10            | 30    | 0.233           | 61    | 0.419           | -95  |
|                          |                        | 4.0        | 0.629           | 130   | 0.98            | 23    | 0.282           | 60    | 0.433           | -106 |
|                          |                        | 4.5        | 0.626           | 122   | 0.90            | 18    | 0.338           | 57    | 0.447           | -117 |
|                          |                        | 5.0        | 0.644           | 113   | 0.83            | 13    | 0.394           | 53    | 0.452           | -130 |
|                          | 5.0                    | 0.1        | 0.792           | -36   | 14.53           | 156   | 0.029           | 72    | 0.921           | -18  |
|                          |                        | 0.3        | 0.663           | -90   | 10.09           | 124   | 0.062           | 52    | 0.676           | -39  |
|                          |                        | 0.5        | 0.566           | -120  | 7.01            | 107   | 0.074           | 46    | 0.510           | -43  |
|                          |                        | 0.7        | 0.535           | -139  | 5.32            | 96    | 0.083           | 45    | 0.425           | -46  |
|                          |                        | 0.9        | 0.517           | -153  | 4.25            | 88    | 0.091           | 47    | 0.380           | -48  |
|                          |                        | 1.0        | 0.510           | -158  | 3.89            | 84    | 0.096           | 48    | 0.367           | -49  |
|                          |                        | 1.3        | 0.515           | -171  | 3.06            | 75    | 0.109           | 51    | 0.333           | -52  |
|                          |                        | 1.5        | 0.515           | -178  | 2.69            | 70    | 0.118           | 53    | 0.322           | -55  |
|                          |                        | 2.0        | 0.516           | 169   | 2.08            | 58    | 0.146           | 56    | 0.310           | -64  |
|                          |                        | 2.5        | 0.548           | 156   | 1.70            | 48    | 0.176           | 58    | 0.294           | -77  |
|                          |                        | 3.0        | 0.556           | 149   | 1.47            | 39    | 0.213           | 59    | 0.306           | -87  |
|                          |                        | 3.5        | 0.559           | 137   | 1.29            | 31    | 0.253           | 58    | 0.319           | -97  |
|                          |                        | 4.0        | 0.587           | 130   | 1.16            | 24    | 0.296           | 56    | 0.334           | -108 |
|                          |                        | 4.5        | 0.586           | 122   | 1.06            | 18    | 0.345           | 53    | 0.351           | -117 |
|                          |                        | 5.0        | 0.608           | 114   | 0.98            | 12    | 0.393           | 49    | 0.358           | -130 |
| 10.0                     | 0.1                    | 0.823      | -24             | 14.80 | 161             | 0.018 | 77              | 0.952 | -13             |      |
|                          | 0.3                    | 0.666      | -63             | 11.47 | 131             | 0.045 | 60              | 0.790 | -29             |      |
|                          | 0.5                    | 0.514      | -87             | 8.47  | 113             | 0.058 | 53              | 0.653 | -34             |      |
|                          | 0.7                    | 0.425      | -108            | 6.60  | 100             | 0.069 | 51              | 0.577 | -38             |      |
|                          | 0.9                    | 0.366      | -124            | 5.37  | 91              | 0.078 | 50              | 0.532 | -40             |      |
|                          | 1.0                    | 0.347      | -132            | 4.91  | 86              | 0.083 | 50              | 0.512 | -42             |      |
|                          | 1.3                    | 0.309      | -152            | 3.91  | 75              | 0.098 | 50              | 0.479 | -44             |      |
|                          | 1.5                    | 0.295      | -163            | 3.44  | 70              | 0.108 | 49              | 0.465 | -48             |      |
|                          | 2.0                    | 0.284      | 172             | 2.65  | 55              | 0.134 | 48              | 0.449 | -55             |      |
|                          | 2.5                    | 0.277      | 151             | 2.18  | 43              | 0.161 | 45              | 0.442 | -63             |      |
|                          | 3.0                    | 0.291      | 134             | 1.87  | 31              | 0.190 | 42              | 0.440 | -71             |      |
|                          | 3.5                    | 0.298      | 118             | 1.63  | 20              | 0.221 | 37              | 0.441 | -82             |      |
|                          | 4.0                    | 0.299      | 108             | 1.46  | 11              | 0.245 | 32              | 0.431 | -92             |      |
|                          | 4.5                    | 0.343      | 96              | 1.35  | 1               | 0.278 | 29              | 0.430 | -102            |      |
|                          | 5.0                    | 0.373      | 82              | 1.24  | -8              | 0.313 | 23              | 0.436 | -113            |      |

Table 1. Common Emitter S-Parameters (continued)


| V <sub>CE</sub><br>(Vdc) | I <sub>C</sub><br>(mA) | f<br>(GHz) | S <sub>11</sub> |       | S <sub>21</sub> |       | S <sub>12</sub> |       | S <sub>22</sub> |       |      |
|--------------------------|------------------------|------------|-----------------|-------|-----------------|-------|-----------------|-------|-----------------|-------|------|
|                          |                        |            | S <sub>11</sub> | ∠φ    | S <sub>21</sub> | ∠φ    | S <sub>12</sub> | ∠φ    | S <sub>22</sub> | ∠φ    |      |
| 6.0                      | 5.0                    | 0.1        | 0.809           | -32   | 14.52           | 158   | 0.024           | 74    | 0.934           | -15   |      |
|                          |                        | 0.3        | 0.665           | -83   | 10.44           | 126   | 0.053           | 55    | 0.721           | -32   |      |
|                          |                        | 0.5        | 0.550           | -112  | 7.37            | 109   | 0.065           | 49    | 0.572           | -35   |      |
|                          |                        | 0.7        | 0.507           | -132  | 5.63            | 98    | 0.074           | 49    | 0.493           | -37   |      |
|                          |                        | 0.9        | 0.482           | -146  | 4.52            | 90    | 0.082           | 50    | 0.452           | -38   |      |
|                          |                        | 1.0        | 0.472           | -152  | 4.12            | 86    | 0.086           | 51    | 0.440           | -39   |      |
|                          |                        | 1.3        | 0.471           | -166  | 3.27            | 77    | 0.098           | 55    | 0.409           | -41   |      |
|                          |                        | 1.5        | 0.469           | -174  | 2.87            | 72    | 0.108           | 57    | 0.398           | -44   |      |
|                          |                        | 2.0        | 0.469           | 172   | 2.22            | 60    | 0.135           | 61    | 0.385           | -52   |      |
|                          |                        | 2.5        | 0.502           | 160   | 1.82            | 50    | 0.166           | 63    | 0.364           | -62   |      |
|                          |                        | 3.0        | 0.512           | 151   | 1.57            | 41    | 0.203           | 64    | 0.372           | -72   |      |
|                          |                        | 3.5        | 0.514           | 140   | 1.38            | 33    | 0.244           | 63    | 0.381           | -81   |      |
|                          |                        | 4.0        | 0.548           | 132   | 1.24            | 25    | 0.289           | 61    | 0.391           | -92   |      |
|                          |                        | 4.5        | 0.545           | 124   | 1.13            | 19    | 0.341           | 58    | 0.404           | -102  |      |
|                          |                        | 5.0        | 0.571           | 117   | 1.04            | 13    | 0.394           | 54    | 0.403           | -114  |      |
|                          | 15.0                   | 15.0       | 0.1             | 0.598 | -56             | 28.57 | 144             | 0.020 | 68              | 0.814 | -26  |
|                          |                        |            | 0.3             | 0.458 | -115            | 15.28 | 111             | 0.038 | 59              | 0.491 | -43  |
|                          |                        |            | 0.5             | 0.396 | -141            | 9.78  | 98              | 0.050 | 62              | 0.367 | -40  |
|                          |                        |            | 0.7             | 0.387 | -156            | 7.18  | 90              | 0.063 | 64              | 0.315 | -39  |
|                          |                        |            | 0.9             | 0.381 | -166            | 5.67  | 84              | 0.077 | 66              | 0.290 | -39  |
|                          |                        |            | 1.0             | 0.377 | -170            | 5.12  | 81              | 0.084 | 67              | 0.284 | -40  |
|                          |                        |            | 1.3             | 0.389 | -179            | 4.01  | 74              | 0.106 | 68              | 0.264 | -41  |
|                          |                        |            | 1.5             | 0.394 | 174             | 3.51  | 70              | 0.120 | 68              | 0.257 | -44  |
|                          |                        |            | 2.0             | 0.397 | 164             | 2.71  | 60              | 0.157 | 66              | 0.247 | -52  |
|                          |                        |            | 2.5             | 0.436 | 154             | 2.21  | 51              | 0.194 | 65              | 0.224 | -64  |
|                          |                        |            | 3.0             | 0.443 | 148             | 1.91  | 43              | 0.233 | 62              | 0.233 | -73  |
|                          |                        |            | 3.5             | 0.448 | 138             | 1.68  | 35              | 0.272 | 59              | 0.240 | -82  |
|                          |                        |            | 4.0             | 0.479 | 131             | 1.52  | 28              | 0.311 | 56              | 0.250 | -92  |
|                          |                        |            | 4.5             | 0.474 | 125             | 1.39  | 21              | 0.353 | 53              | 0.265 | -101 |
|                          |                        |            | 5.0             | 0.506 | 118             | 1.29  | 15              | 0.395 | 49              | 0.263 | -113 |
|                          | 30.0                   | 30.0       | 0.1             | 0.476 | -76             | 36.18 | 135             | 0.017 | 66              | 0.706 | -33  |
|                          |                        |            | 0.3             | 0.396 | -134            | 16.55 | 104             | 0.032 | 65              | 0.387 | -44  |
|                          |                        |            | 0.5             | 0.364 | -156            | 10.31 | 94              | 0.046 | 69              | 0.296 | -38  |
|                          |                        |            | 0.7             | 0.365 | -167            | 7.50  | 87              | 0.061 | 71              | 0.261 | -36  |
|                          |                        |            | 0.9             | 0.364 | -175            | 5.88  | 81              | 0.077 | 72              | 0.245 | -36  |
|                          |                        |            | 1.0             | 0.360 | -178            | 5.23  | 79              | 0.085 | 72              | 0.242 | -37  |
|                          |                        |            | 1.3             | 0.376 | 175             | 4.16  | 73              | 0.108 | 71              | 0.228 | -39  |
|                          |                        |            | 1.5             | 0.382 | 170             | 3.63  | 69              | 0.124 | 71              | 0.222 | -41  |
|                          |                        |            | 2.0             | 0.387 | 161             | 2.79  | 59              | 0.163 | 68              | 0.215 | -50  |
|                          |                        |            | 2.5             | 0.428 | 152             | 2.28  | 51              | 0.200 | 65              | 0.193 | -63  |
|                          |                        |            | 3.0             | 0.436 | 146             | 1.96  | 43              | 0.240 | 62              | 0.202 | -72  |
|                          |                        |            | 3.5             | 0.440 | 136             | 1.73  | 35              | 0.279 | 59              | 0.210 | -82  |
|                          |                        |            | 4.0             | 0.473 | 130             | 1.56  | 28              | 0.317 | 55              | 0.219 | -92  |
|                          |                        |            | 4.5             | 0.470 | 124             | 1.43  | 21              | 0.359 | 52              | 0.234 | -101 |
|                          |                        |            | 5.0             | 0.499 | 118             | 1.32  | 15              | 0.400 | 48              | 0.233 | -113 |

Table 1. Common Emitter S-Parameters (continued)

| V <sub>CE</sub><br>(Vdc) | I <sub>C</sub><br>(mA) | f<br>(GHz) | NF <sub>min</sub><br>(dB) | Γ <sub>o</sub> |     | R <sub>N</sub><br>(Ω) | R <sub>N</sub> | GNF<br>(dB) |
|--------------------------|------------------------|------------|---------------------------|----------------|-----|-----------------------|----------------|-------------|
|                          |                        |            |                           | MAG            | ∠φ  |                       |                |             |
| 1.0                      | 1.0                    | 0.3        | 0.97                      | 0.58           | 38  | 18                    | 0.35           | 15.6        |
|                          |                        | 0.5        | 1.16                      | 0.56           | 62  | 18                    | 0.36           | 13.1        |
|                          |                        | 0.7        | 1.35                      | 0.54           | 83  | 17                    | 0.34           | 10.9        |
|                          |                        | 0.9        | 1.52                      | 0.53           | 102 | 15                    | 0.30           | 9.0         |
|                          |                        | 1.0        | 1.61                      | 0.53           | 111 | 14                    | 0.28           | 8.2         |
|                          |                        | 1.5        | 2.02                      | 0.56           | 149 | 8                     | 0.16           | 5.2         |
|                          |                        | 2.0        | 2.39                      | 0.64           | 175 | 4                     | 0.08           | 4.5         |
| 3.0                      | 3.0                    | 0.3        | 0.93                      | 0.37           | 37  | 10                    | 0.20           | 19.8        |
|                          |                        | 0.5        | 1.03                      | 0.36           | 59  | 10                    | 0.20           | 17.0        |
|                          |                        | 0.7        | 1.13                      | 0.36           | 80  | 10                    | 0.20           | 14.6        |
|                          |                        | 0.9        | 1.24                      | 0.37           | 99  | 9                     | 0.18           | 12.4        |
|                          |                        | 1.0        | 1.29                      | 0.37           | 108 | 9                     | 0.18           | 11.4        |
|                          |                        | 1.5        | 1.59                      | 0.43           | 146 | 7                     | 0.13           | 8.6         |
|                          |                        | 2.0        | 1.92                      | 0.53           | 172 | 4                     | 0.08           | 6.8         |
| 6.0                      | 5.0                    | 0.3        | 0.98                      | 0.29           | 34  | 10                    | 0.19           | 21.4        |
|                          |                        | 0.5        | 1.05                      | 0.29           | 56  | 10                    | 0.19           | 18.5        |
|                          |                        | 0.7        | 1.12                      | 0.29           | 76  | 9                     | 0.19           | 16.0        |
|                          |                        | 0.9        | 1.20                      | 0.30           | 95  | 9                     | 0.18           | 13.9        |
|                          |                        | 1.0        | 1.28                      | 0.31           | 104 | 9                     | 0.17           | 13.0        |
|                          |                        | 1.5        | 1.51                      | 0.37           | 142 | 7                     | 0.13           | 10.1        |
|                          |                        | 2.0        | 1.84                      | 0.47           | 170 | 5                     | 0.10           | 8.2         |

Table 2. Common Emitter Noise Parameters

## PACKAGE DIMENSIONS

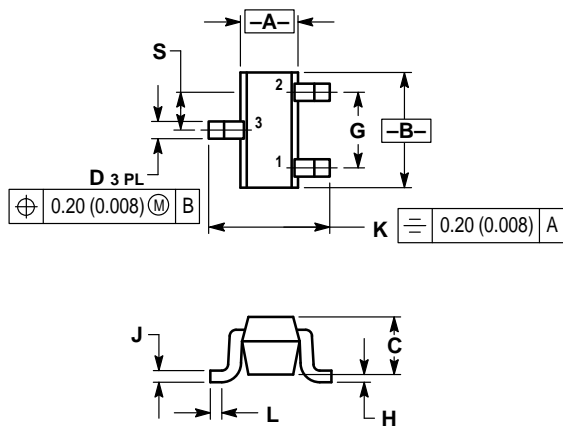


- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: MILLIMETER.

| DIM | MILLIMETERS |      | INCHES    |       |
|-----|-------------|------|-----------|-------|
|     | MIN         | MAX  | MIN       | MAX   |
| A   | 0.70        | 0.80 | 0.028     | 0.031 |
| B   | 1.40        | 1.80 | 0.055     | 0.071 |
| C   | 0.60        | 0.90 | 0.024     | 0.035 |
| D   | 0.15        | 0.30 | 0.006     | 0.012 |
| G   | 1.00 BSC    |      | 0.039 BSC |       |
| H   | —           | 0.10 | —         | 0.004 |
| J   | 0.10        | 0.25 | 0.004     | 0.010 |
| K   | 1.45        | 1.75 | 0.057     | 0.069 |
| L   | 0.10        | 0.20 | 0.004     | 0.008 |
| S   | 0.50 BSC    |      | 0.020 BSC |       |

- STYLE 1:  
 PIN 1. BASE  
 2. EMITTER  
 3. COLLECTOR

### CASE 463-01 ISSUE A

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Mfax is a trademark of Motorola, Inc.

**How to reach us:**

**USA/EUROPE/Locations Not Listed:** Motorola Literature Distribution;  
 P.O. Box 5405, Denver, Colorado 80217. 1-303-675-2140 or 1-800-441-2447

**JAPAN:** Nippon Motorola Ltd.: SPD, Strategic Planning Office, 4-32-1,  
 Nishi-Gotanda, Shinagawa-ku, Tokyo 141, Japan. 81-3-5487-8488

**Customer Focus Center: 1-800-521-6274**

**Mfax™:** RMFAX0@email.sps.mot.com – TOUCHTONE 1-602-244-6609  
 Motorola Fax Back System – US & Canada ONLY 1-800-774-1848  
 – http://sps.motorola.com/mfax/

**ASIA/PACIFIC:** Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,  
 51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298

**HOME PAGE:** <http://motorola.com/sps/>

