



Shanghai Lunsure Electronic
Technology Co.,Ltd
Tel:0086-21-37185008
Fax:0086-21-57152769

MS820 THRU MS8100

Features

- Low Switching Noise
- Low Forward Voltage Drop
- High Current Capability
- High Surge Current Capability

Maximum Ratings

- Operating Temperature: -55°C to +125°C
- Storage Temperature: -55°C to +150°C
- Maximum Thermal Resistance; 30°C/W Junction To Lead

Catalog Number	Device Marking	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
MS820	MS820	20V	14V	20V
MS830	MS830	30V	21V	30V
MS835	MS835	35V	24.5V	35V
MS840	MS840	40V	28V	40V
MS845	MS845	45V	31.5V	45V
MS860	MS860	60V	42V	60V
MS880	MS880	80V	56V	80V
MS8100	MS8100	100V	70V	100V


Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current	$I_{F(AV)}$	8.0A	$T_A = 120^\circ C$
Peak Forward Surge Current	I_{FSM}	200A	8.3ms, half sine
Maximum Instantaneous Forward Voltage			
MS820-MS860	V_F	.62V	$I_{FM} = 8.0A;$
MS880-MS8100		.85V	$T_A = 25^\circ C^*$
Maximum DC Reverse Current At Rated DC Blocking Voltage	I_R	1.0mA	$T_A = 25^\circ C$
		50mA	$T_A = 100^\circ C$
Typical Junction Capacitance	C_J	550pF	Measured at 1.0MHz, $V_R=4.0V$

*Pulse test: Pulse width 300 μ sec, Duty cycle 1%

**8 Amp Schottky
Barrier Rectifier
20 to 100 Volts**


DO-201AD

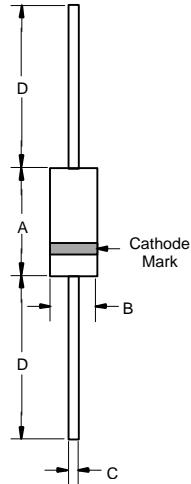

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	---	.370	---	9.50	
B	---	.250	---	6.40	
C	.048	.052	1.20	1.30	
D	1.000	---	25.40	---	


MS820 thru MS8100

Figure 1
Typical Forward Characteristics

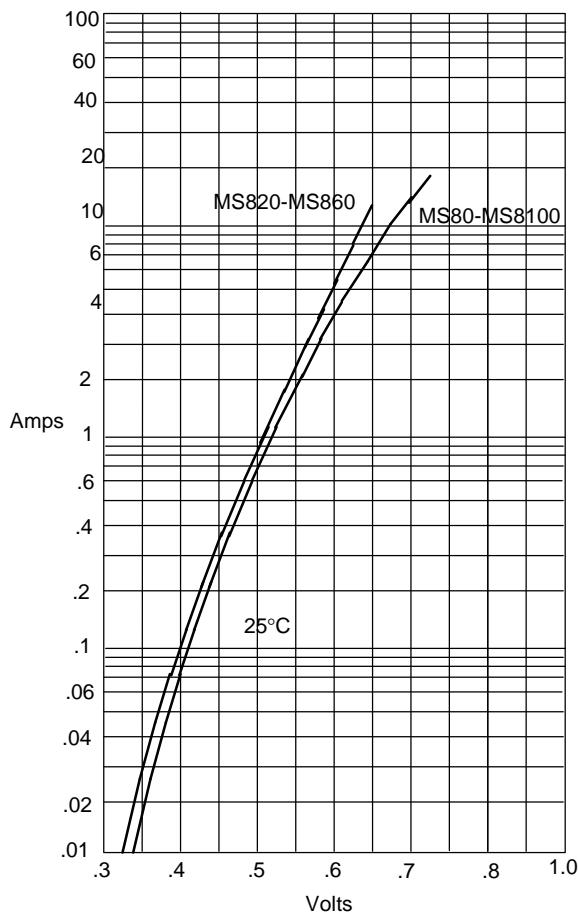


Instantaneous Forward Current - Amperesversus
Instantaneous Forward Voltage - Volts

Figure 2
Forward Derating Curve

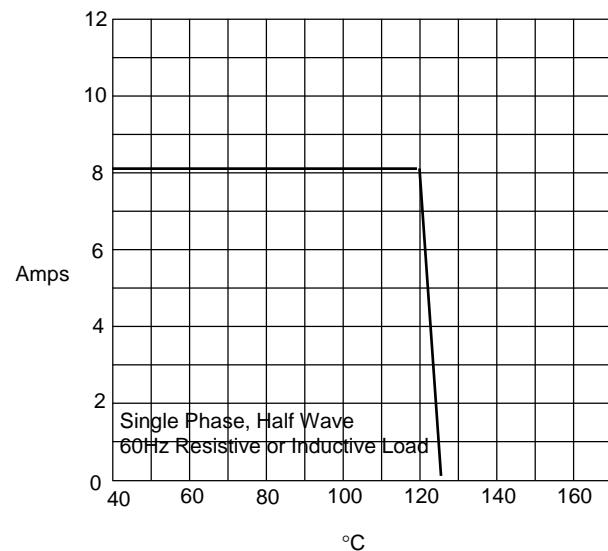

Average Forward Rectified Current - Amperesversus
Ambient Temperature - °C

Figure 3
Junction Capacitance

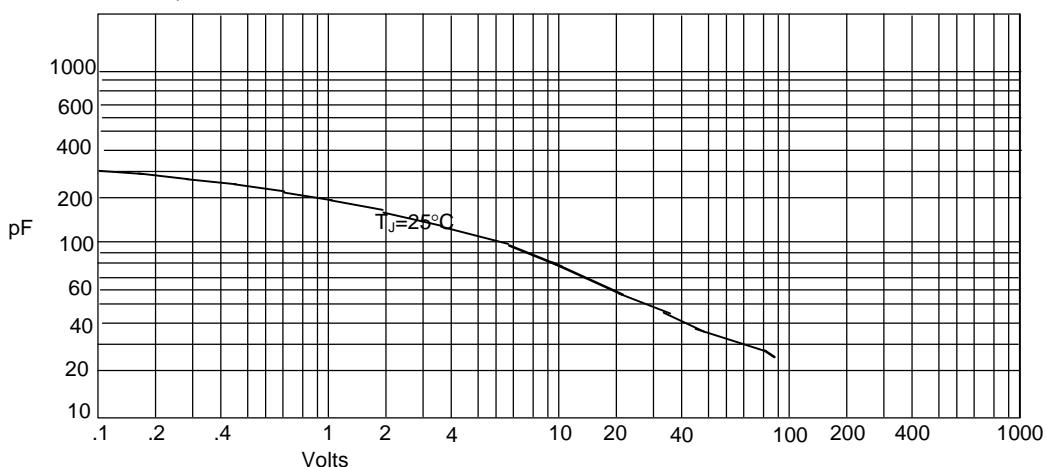


Junction Capacitance - pFversus
Reverse Voltage - Volts


MS820 thru MS8100



Figure 4
Typical Reverse Characteristics

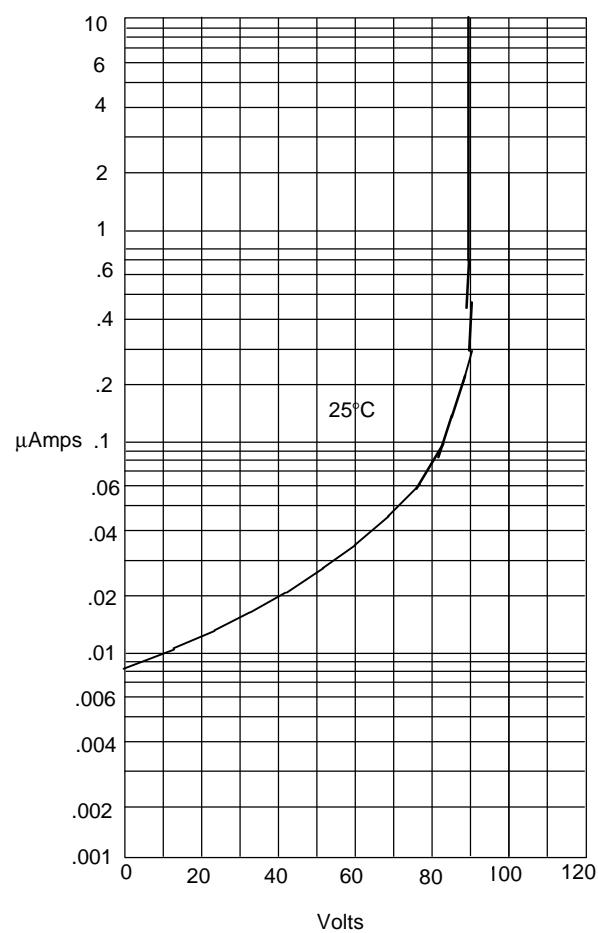

Instantaneous Reverse Leakage Current - MicroAmperesversus
Percent Of Rated Peak Reverse Voltage - Volts

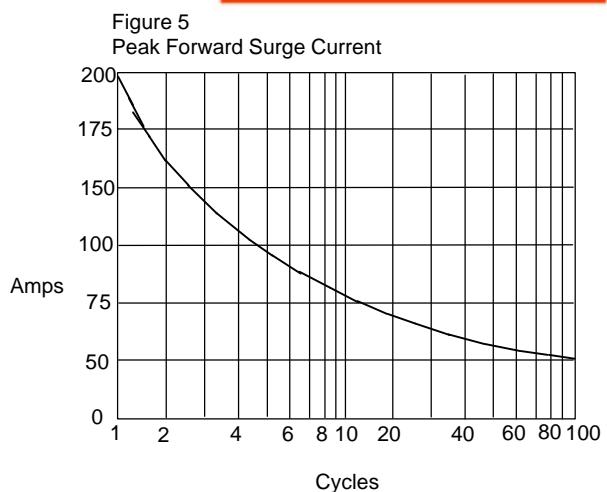

Peak Forward Surge Current - Amperesversus
Number Of Cycles At 60Hz - Cycles