



# LM2931XX, LM2931AXX33 LM2931AXX50

## Very low drop voltage regulators with inhibit function


### Features

- Very low dropout voltage (0.15 V typ. at 10 mA load)
- Low quiescent current (typ. 2.5 mA, at 100 mA load)
- Output current up to 100 mA
- Adjustable (from  $V_{OUT} = 2.5$  V only SO-8) and fixed (3.3 V and 5 V) output voltage version
- Internal current and thermal limit
- Load dump protection up to 60 V
- Reverse transient protection up to -50 V
- Temperature range: -40 to 125 °C
- Package available: TO-92, DPAK, SO-8 (with inhibit control)

### Description

The LM2931xx are very low drop regulators. The very low drop voltage and the low quiescent current make them particularly suitable for low noise, low power applications and in battery-powered systems. In the 8-pin configuration (SO-8), fully compatible with the older L78Lxx family, a shutdown logic control function is available.

This means that when the device is used as a local regulator it is possible to put a part of the board in standby, decreasing total power consumption. Ideal for automotive applications, LM2931xx is protected from reverse battery installations or 2 battery jumps. During the transient, such as a 60 V load dump, when the

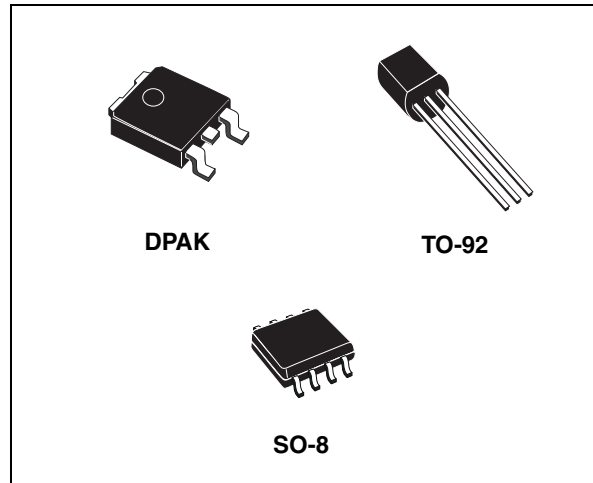

input voltage can exceed the specified maximum operating input voltage of 26 V, the regulator automatically shuts down to protect both internal circuitry and the load.

Table 1. Device summary


| Order codes  |             |             | Output voltages |
|--------------|-------------|-------------|-----------------|
| DPAK         | TO-92 (Bag) | SO-8        |                 |
|              |             | LM2931AD33R | 3.3 V           |
| LM2931ADT50R | LM2931AZ50R | LM2931AD50R | 5.0 V           |
|              |             | LM2931D-R   | 2.5 to 26 V     |

# Contents

|   |                                  |    |
|---|----------------------------------|----|
| 1 | Diagram .....                    | 3  |
| 2 | Pin configuration .....          | 4  |
| 3 | Maximum ratings .....            | 5  |
| 4 | Application circuits .....       | 6  |
| 5 | Electrical characteristics ..... | 7  |
| 6 | Typical characteristics .....    | 10 |
| 7 | Package mechanical data .....    | 14 |
| 8 | Revision history .....           | 20 |


# 1 Diagram

Figure 1. Schematic diagram

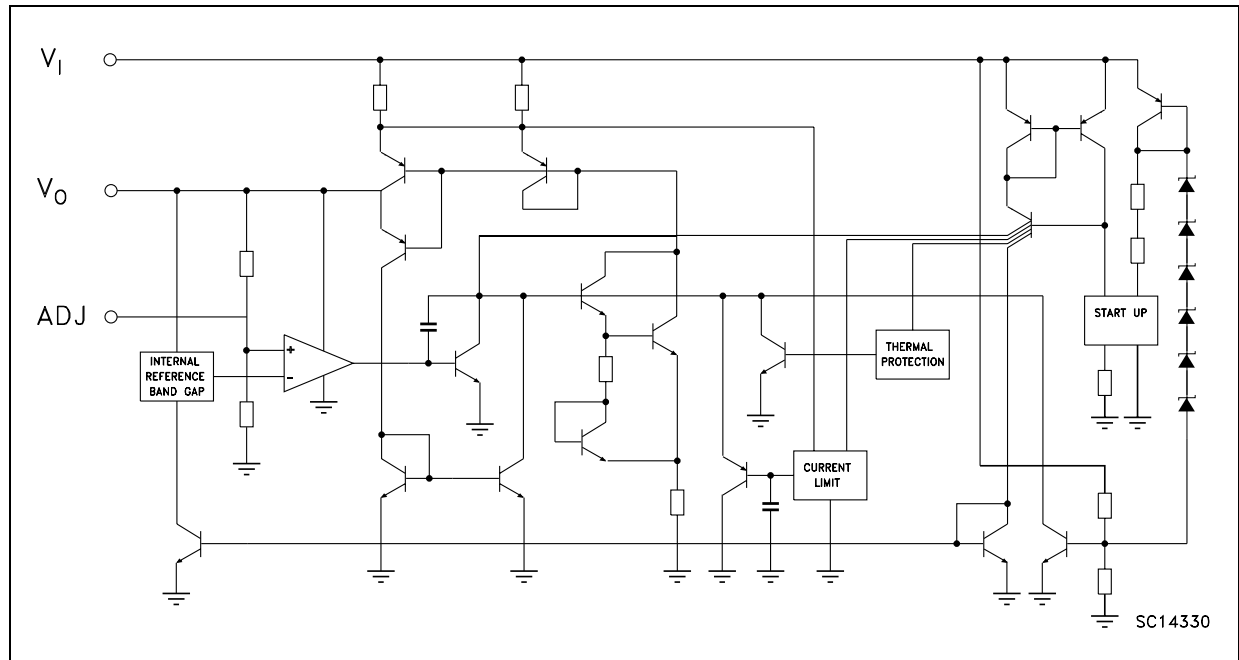

## 2 Pin configuration

Figure 2. Pin connections (top view)

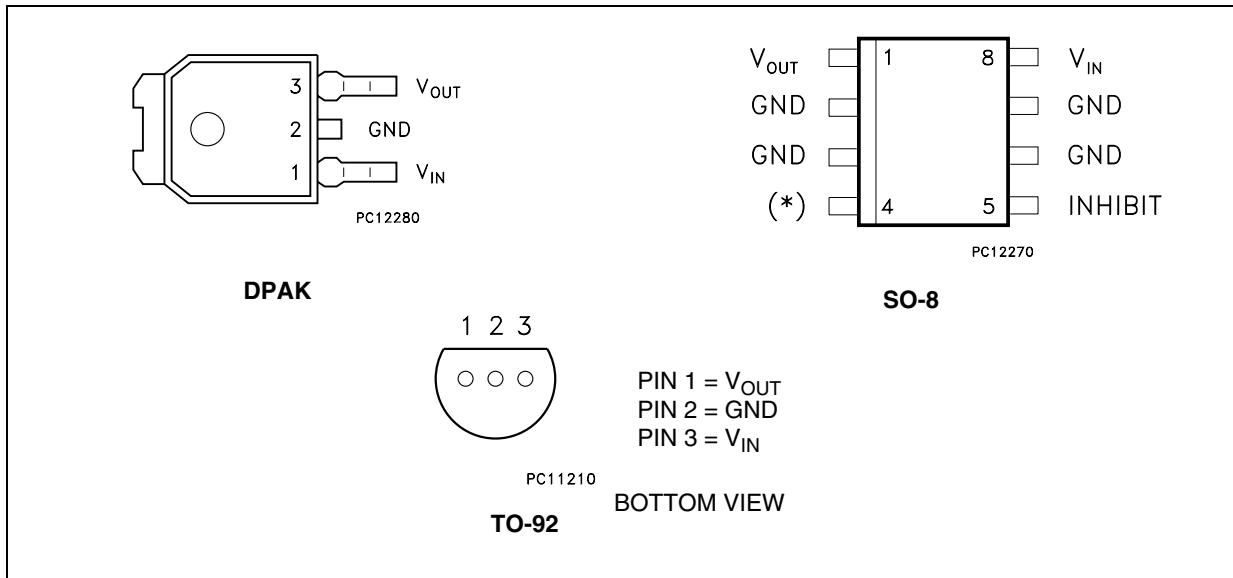

### 3 Maximum ratings

**Table 2. Absolute maximum ratings**

| Symbol    | Parameter  | Value              | Unit |
|-----------|--|--------------------|------|
| $V_I$     | DC positive input voltage                          | 40                 | V    |
| $V_I$     | DC reverse input voltage                           | -15                | V    |
| $V_I$     | Transient input voltage ( $\tau < 100$ ms)         | 60                 | V    |
| $V_I$     | Transient reverse input voltage ( $\tau < 100$ ms) | -50                | V    |
| $V_{INH}$ | Inhibit input voltage                              | 40                 | V    |
| $I_O$     | Output current                                     | Internally limited |      |
| $T_{STG}$ | Storage temperature range                          | -65 to 150         | °C   |
| $T_{OP}$  | Operating junction temperature range               | -40 to 125         | °C   |

*Note:* Absolute maximum ratings are those values beyond which damage to the device may occur. Functional operation under these condition is not implied.

**Table 3. Thermal data**

| Symbol     | Parameter                           | SO-8              | DPAK | TO-92 | Unit |
|------------|-------------------------------------|-------------------|------|-------|------|
| $R_{thJC}$ | Thermal resistance junction-case    | 20                | 8    |       | °C/W |
| $R_{thJA}$ | Thermal resistance junction-ambient | 55 <sup>(1)</sup> | 100  | 200   | °C/W |

1. Considering 6 cm<sup>2</sup> of copper board heat-sink.

## 4 Application circuits

Figure 3. Application circuit for fixed output


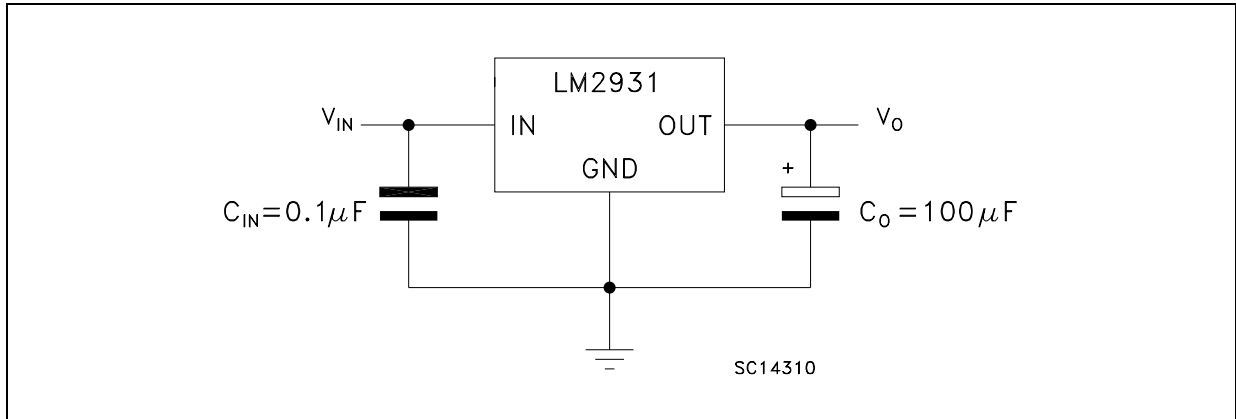


Figure 4. Application circuit for adjustable output

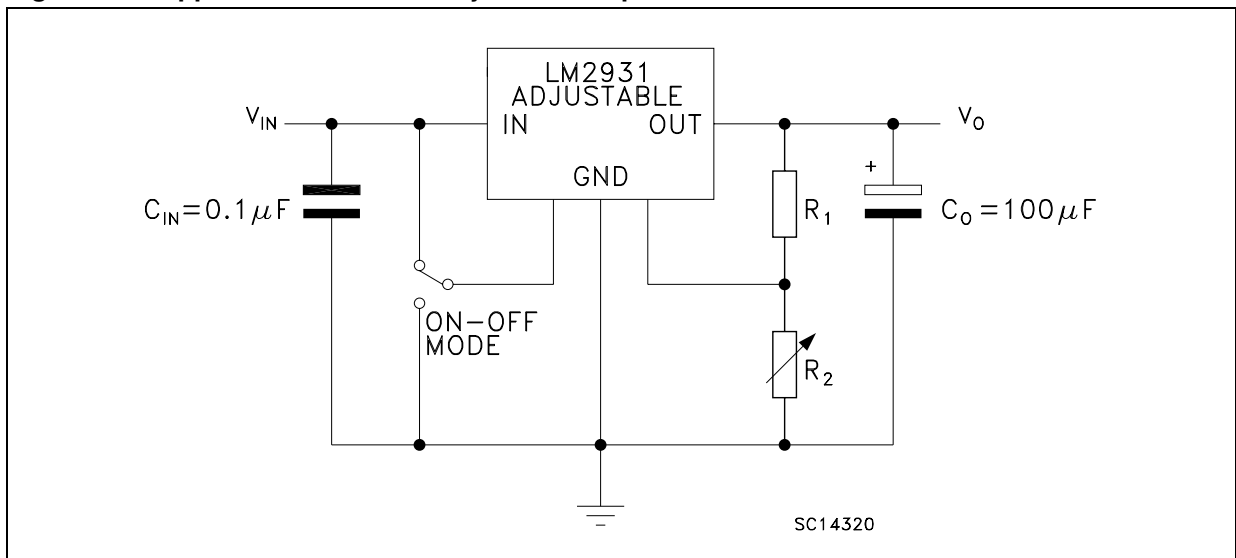

Note:  $R_1$  suggested value = 27 k $\Omega$

$$V_O = V_{REF} (R_1 + R_2) / R_1$$

## 5 Electrical characteristics

Refer to the application circuit [Figure 3](#),  $T_J = 25\text{ }^\circ\text{C}$ ,  $C_I = 0.1\text{ }\mu\text{F}$ ,  $C_O = 100\text{ }\mu\text{F}$ ,  $V_I = 14\text{ V}$ ,  $I_O = 10\text{ mA}$ ,  $V_{INH} = 0\text{ V}$ , unless otherwise specified.

**Table 4. Electrical characteristics of LM2931Axx33**

| Symbol       | Parameter                                     | Test conditions  | Min.  | Typ. | Max.  | Unit                |
|--------------|---|--|-------|------|-------|---------------------|
| $V_I$        | Maximum operating input voltage               | $I_O = 10\text{ mA}$ , $T_J = -40\text{ to }125^\circ\text{C}$   | 26    |      |       | V                   |
| $V_O$        | Output voltage                                |  | 3.135 | 3.3  | 3.425 | V                   |
| $V_O$        | Output voltage                                | $I_O = 100\text{ mA}$ , $V_I = 6\text{ to }26\text{ V}$<br>$T_J = -40\text{ to }125^\circ\text{C}$                 | 3.135 | 3.3  | 3.465 | V                   |
| $\Delta V_O$ | Line regulation                               | $V_I = 9\text{ to }16\text{ V}$  |       | 2    | 10    | mV                  |
|              |   | $V_I = 6\text{ to }26\text{ V}$  |       | 4    | 33    |                     |
| $\Delta V_O$ | Load regulation                               | $I_O = 5\text{ to }100\text{ mA}$  |       | 10   | 33    | mV                  |
| $V_d$        | Dropout voltage <sup>(1)</sup> <sup>(2)</sup> | $I_O = 10\text{ mA}$   |       | 90   | 250   | mV                  |
|              |   | $I_O = 100\text{ mA}$  |       | 250  | 600   |                     |
| $I_d$        | Quiescent current<br>ON MODE                  | $I_O = 100\text{ mA}$  |       | 2.5  | 30    | mA                  |
|              | OFF MODE                                      | $V_{INH} = 2.5\text{ V}$ , $R_{LOAD} = 330\text{ }\Omega$  |       | 0.3  | 1     | mA                  |
| $I_{SC}$     | Short circuit current                         |  | 100   | 300  |       | mA                  |
| SVR          | Supply voltage rejection                      | $I_O = 100\text{ mA}$ , $V_I = 14 \pm 2\text{ V}$<br>$f = 120\text{ Hz}$ , $T_J = -40\text{ to }125^\circ\text{C}$ | 55    | 78   |       | dB                  |
| $V_{IL}$     | Control input voltage low                     | $T_J = -40\text{ to }125^\circ\text{C}$  |       | 2    | 1.2   | V                   |
| $V_{IH}$     | Control input voltage high                    | $T_J = -40\text{ to }125^\circ\text{C}$  | 3.25  | 2    |       | V                   |
| $I_{INH}$    | Inhibit input current                         | $V_{INH} = 2.5\text{ V}$   |       | 22   | 50    | $\mu\text{A}$       |
| $V_I$        | Transient input voltage                       | $R_{LOAD} = 330\text{ }\Omega$ , $\tau < 100\text{ms}$   | 60    | 70   |       | V                   |
| $V_I$        | Reverse polarity input<br>voltage             | $V_O = \pm 0.3\text{ V}$ , $R_{LOAD} = 330\text{ }\Omega$  | -15   | -50  |       | V                   |
| $V_I$        | Reverse polarity input<br>voltage transient   | $R_{LOAD} = 330\text{ }\Omega$ , $\tau < 100\text{ms}$   | -50   |      |       | V                   |
| eN           | Output noise voltage                          | $B = 10\text{ Hz to }100\text{ kHz}$   |       | 330  |       | $\mu\text{V}_{RMS}$ |

1. Reference voltage is measured from  $V_{OUT}$  to ADJ pin.

2.  $V_d$  measured when the output voltage has dropped 100 mV from the nominal value obtained at 14 V.

Refer to the application circuit [Figure 3](#),  $T_J = 25\text{ °C}$ ,  $C_1 = 0.1\text{ }\mu\text{F}$ ,  $C_O = 100\text{ }\mu\text{F}$ ,  $V_I = 14\text{ V}$ ,  $I_O = 10\text{ mA}$ ,  $V_{INH} = 0\text{ V}$ , unless otherwise specified.

**Table 5. Electrical characteristics of LM2931Axx50**

| Symbol       | Parameter                                     | Test conditions  | Min. | Typ. | Max. | Unit                |
|--------------|---|--|------|------|------|---------------------|
| $V_I$        | Maximum operating input voltage               | $I_O = 10\text{ mA}$ , $T_J = -40\text{ to }125\text{ °C}$   | 26   |      |      | V                   |
| $V_O$        | Output voltage                                |  | 4.81 | 5    | 5.19 | V                   |
| $V_O$        | Output voltage                                | $I_O = 100\text{ mA}$ , $V_I = 6\text{ to }26\text{ V}$<br>$T_J = -40\text{ to }125\text{ °C}$                 | 4.75 | 5    | 5.25 | V                   |
| $\Delta V_O$ | Line regulation                               | $V_I = 9\text{ to }16\text{ V}$  |      | 2    | 10   | mV                  |
|              |   | $V_I = 6\text{ to }26\text{ V}$  |      | 4    | 30   |                     |
| $\Delta V_O$ | Load regulation                               | $I_O = 5\text{ to }100\text{ mA}$  |      | 15   | 50   | mV                  |
| $V_d$        | Dropout voltage <sup>(1)</sup> <sup>(2)</sup> | $I_O = 10\text{ mA}$   |      | 90   | 200  | mV                  |
|              |   | $I_O = 100\text{ mA}$  |      | 250  | 600  |                     |
| $I_d$        | Quiescent current<br>ON MODE                  | $I_O = 100\text{ mA}$  |      | 2.5  | 30   | mA                  |
|              | OFF MODE                                      | $V_{INH} = 2.5\text{ V}$ , $R_{LOAD} = 500\text{ }\Omega$  |      | 0.3  | 1    | mA                  |
| $I_{SC}$     | Short circuit current                         |  | 100  | 300  |      | mA                  |
| SVR          | Supply voltage rejection                      | $I_O = 100\text{ mA}$ , $V_I = 14 \pm 2\text{ V}$<br>$f = 120\text{ Hz}$ , $T_J = -40\text{ to }125\text{ °C}$ | 55   | 75   |      | dB                  |
| $V_{IL}$     | Control input voltage low                     | $T_J = -40\text{ to }125\text{ °C}$  |      | 2    | 1.2  | V                   |
| $V_{IH}$     | Control input voltage high                    | $T_J = -40\text{ to }125\text{ °C}$  | 3.25 | 2    |      | V                   |
| $I_{INH}$    | Inhibit input current                         | $V_{INH} = 2.5\text{ V}$   |      | 22   | 50   | $\mu\text{A}$       |
| $V_I$        | Transient input voltage                       | $R_{LOAD} = 500\text{ }\Omega$ , $\tau < 100\text{ ms}$  | 60   | 70   |      | V                   |
| $V_I$        | Reverse polarity input voltage                | $V_O = \pm 0.3\text{ V}$ , $R_{LOAD} = 500\text{ }\Omega$  | -15  | -50  |      | V                   |
| $V_I$        | Reverse polarity input voltage transient      | $R_{LOAD} = 500\text{ }\Omega$ , $\tau < 100\text{ ms}$  | -50  |      |      | V                   |
| eN           | Output noise voltage                          | $B = 10\text{ Hz to }100\text{ kHz}$   |      | 500  |      | $\mu\text{V}_{RMS}$ |

1. Reference voltage is measured from  $V_{OUT}$  to ADJ pin.

2.  $V_d$  measured when the output voltage has dropped 100 mV from the nominal value obtained at 14 V.



Refer to the application circuit [Figure 4](#) with  $R_1 = 27 \text{ k}\Omega$  and  $R_2 = 40.5 \text{ k}\Omega$ ,  $T_J = 25 \text{ }^\circ\text{C}$ ,  $C_1 = 0.1 \text{ }\mu\text{F}$ ,  $C_O = 100 \text{ }\mu\text{F}$ ,  $V_I = 14 \text{ V}$ ,  $I_O = 10 \text{ mA}$ ,  $V_{INH} = 0 \text{ V}$ , unless otherwise specified.

**Table 6. Electrical characteristics of LM2931xx**

| Symbol       | Parameter                                | Test conditions   | Min. | Typ. | Max. | Unit                |
|--------------|--|---|------|------|------|---------------------|
| $V_I$        | Maximum operating input voltage          | $I_O = 10 \text{ mA}$ , $T_J = -40 \text{ to } 125^\circ\text{C}$   | 26   |      |      | V                   |
| $V_{REF}$    | Reference voltage <sup>(1)</sup>         |   | 1.14 | 1.2  | 1.26 | V                   |
| $V_{REF}$    | Reference voltage <sup>(1)</sup>         | $I_O = 100 \text{ mA}$ , $T_J = -40 \text{ to } 125^\circ\text{C}$  | 1.08 | 1.2  | 1.32 | V                   |
| $\Delta V_O$ | Line regulation                          | $V_I = 3.6 \text{ to } 26 \text{ V}$  |      | 0.6  | 4.5  | mV                  |
| $\Delta V_O$ | Load regulation                          | $I_O = 5 \text{ to } 100 \text{ mA}$  |      | 9    | 30   | mV                  |
| $V_d$        | Dropout voltage <sup>(1) (2)</sup>       | $I_O = 10 \text{ mA}$   |      | 90   | 200  | mV                  |
|              |  | $I_O = 100 \text{ mA}$  |      | 250  | 600  |                     |
| $I_d$        | Quiescent current ON MODE                | $I_O = 100 \text{ mA}$  |      | 2.5  | 30   | mA                  |
|              | OFF MODE                                 | $V_{INH} = 2.5 \text{ V}$ , $R_{LOAD} = 300 \text{ }\Omega$   |      | 0.3  | 1    | mA                  |
| $I_{SC}$     | Short circuit current                    |   | 100  | 300  |      | mA                  |
| SVR          | Supply voltage rejection                 | $I_O = 100 \text{ mA}$ , $V_I = 14 \pm 2 \text{ V}$<br>$f = 120 \text{ Hz}$ , $T_J = -40 \text{ to } 125^\circ\text{C}$ | 55   | 80   |      | dB                  |
| $V_{IL}$     | Control input voltage low                | $T_J = -40 \text{ to } 125^\circ\text{C}$   |      | 2    | 1.2  | V                   |
| $V_{IH}$     | Control input voltage high               | $T_J = -40 \text{ to } 125^\circ\text{C}$   | 3.25 | 2    |      | V                   |
| $I_{INH}$    | Inhibit input current                    | $V_{INH} = 2.5 \text{ V}$   |      | 22   | 50   | $\mu\text{A}$       |
| $V_I$        | Transient input voltage                  | $R_{LOAD} = 300 \text{ }\Omega$ , $\tau < 100\text{ms}$   | 60   | 70   |      | V                   |
| $V_I$        | Reverse polarity input voltage           | $V_O = \pm 0.3 \text{ V}$ , $R_{LOAD} = 300 \text{ }\Omega$   | -15  | -50  |      | V                   |
| $V_I$        | Reverse polarity input voltage transient | $R_{LOAD} = 300 \text{ }\Omega$ , $\tau < 100\text{ms}$   | -50  |      |      | V                   |
| eN           | Output noise voltage                     | $B = 10 \text{ Hz to } 100 \text{ kHz}$   |      | 330  |      | $\mu\text{V}_{RMS}$ |


1. Reference voltage is measured from  $V_{OUT}$  to ADJ pin.

2.  $V_d$  measured when the output voltage has dropped 100 mV from the nominal value obtained at 14 V.


## 6 Typical characteristics

Unless otherwise specified  $C_I = 0.1 \mu\text{F}$ ,  $C_O = 100 \mu\text{F}$ .


**Figure 5. Output voltage vs. temperature**

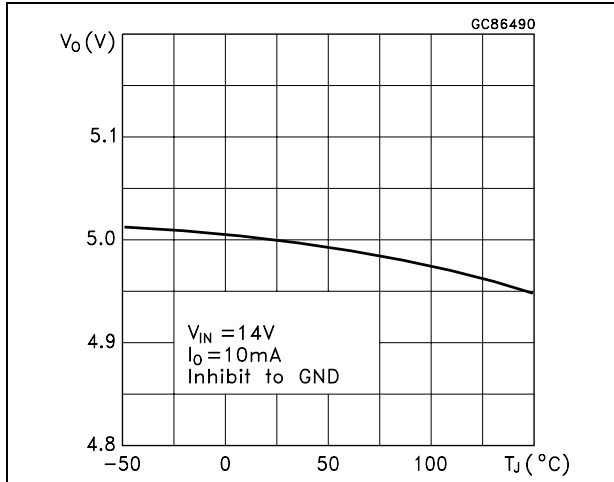


**Figure 6. Output voltage vs. temperature**

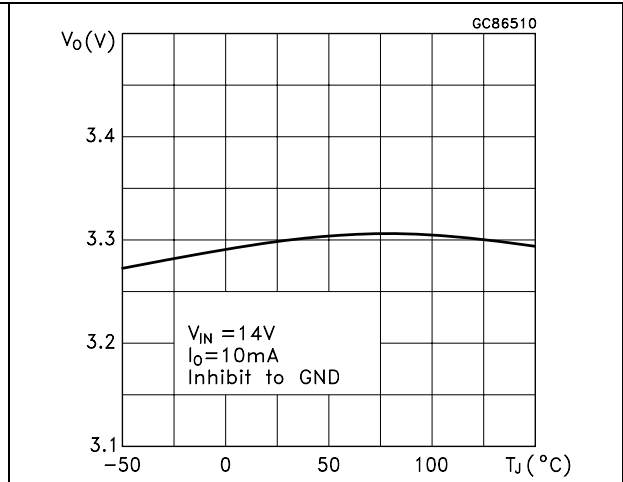


**Figure 7. Reference voltage vs. temperature**

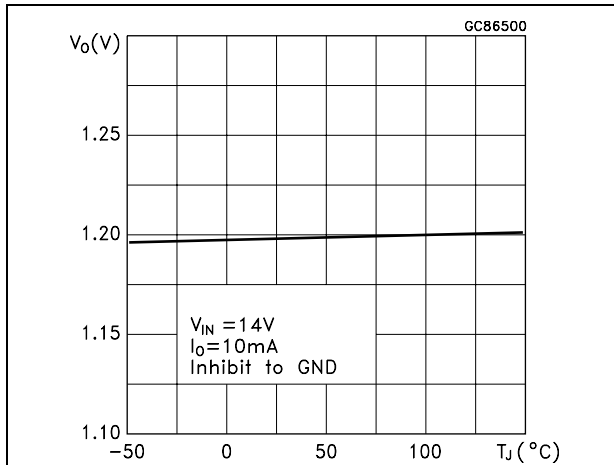

**Figure 8. Line regulation vs. temperature**

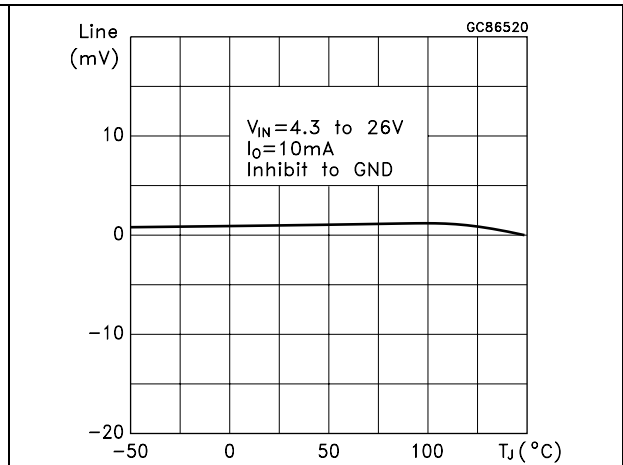

**Figure 9. Load regulation vs. temperature**

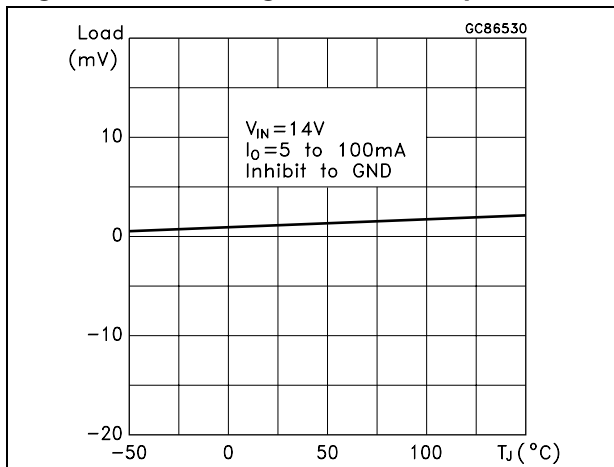

**Figure 10. Dropout voltage vs. temperature**

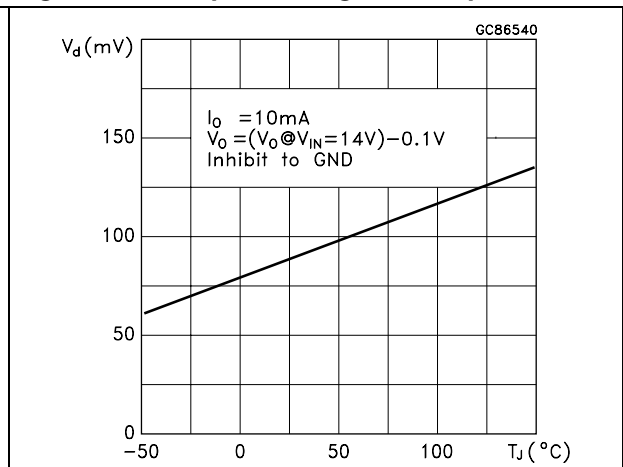


Figure 11. Dropout voltage vs. temperature

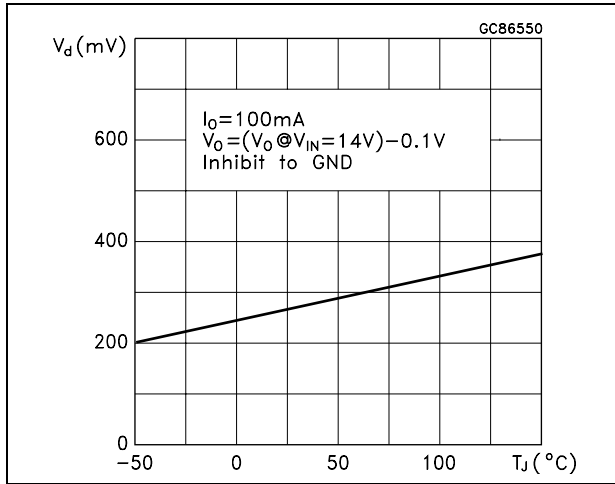


Figure 12. Dropout voltage vs. output current

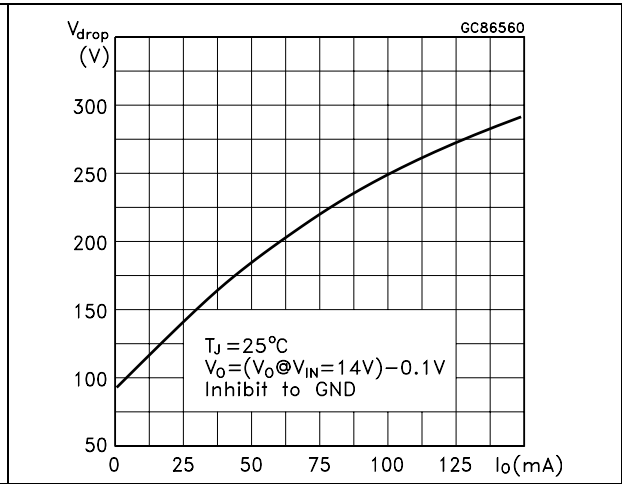


Figure 13. Output voltage vs. input voltage

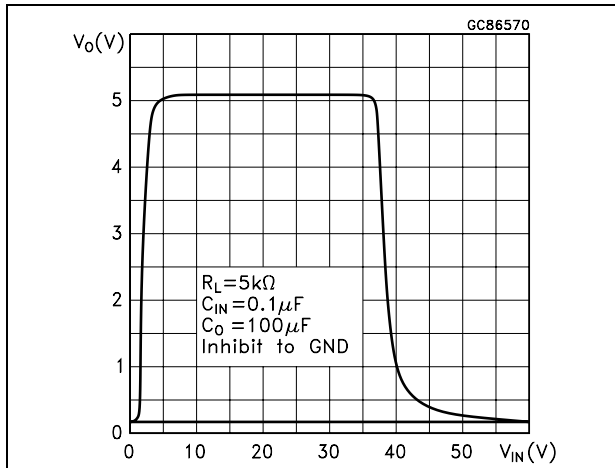


Figure 14. Short circuit current vs. drop voltage

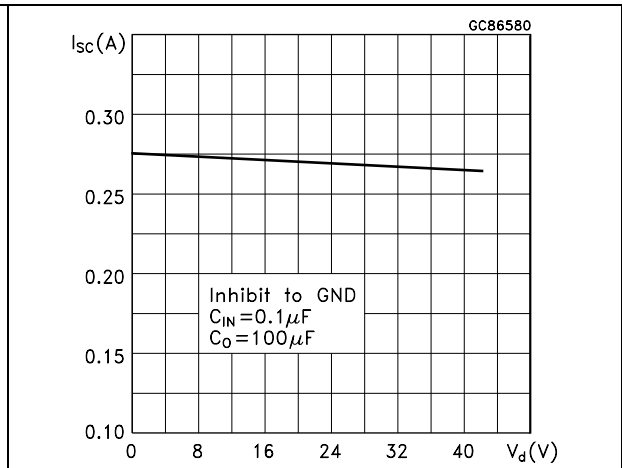


Figure 15. Quiescent current vs. temperature

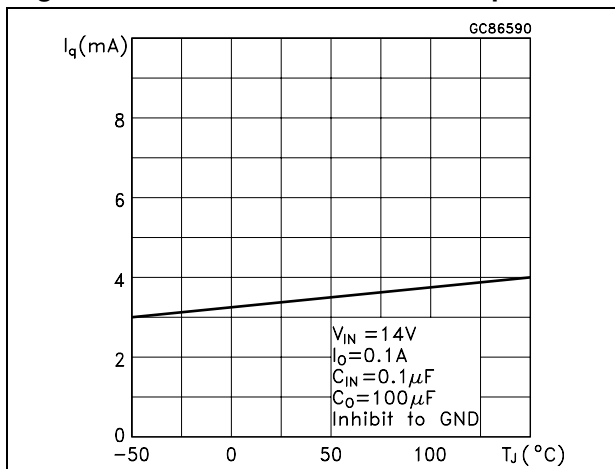


Figure 16. Quiescent current vs. input voltage

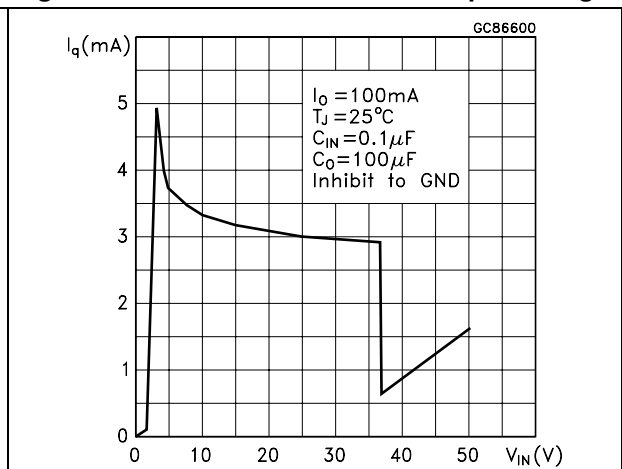


Figure 17. Quiescent current vs. output current

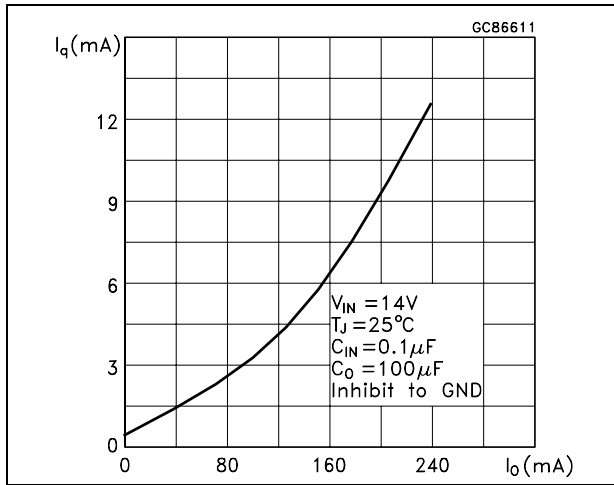


Figure 18. Supply voltage rejection vs. temperature

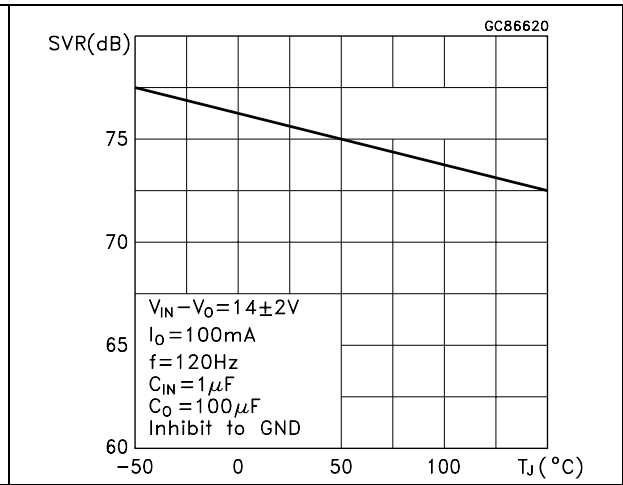


Figure 19. Supply voltage rejection vs. frequency

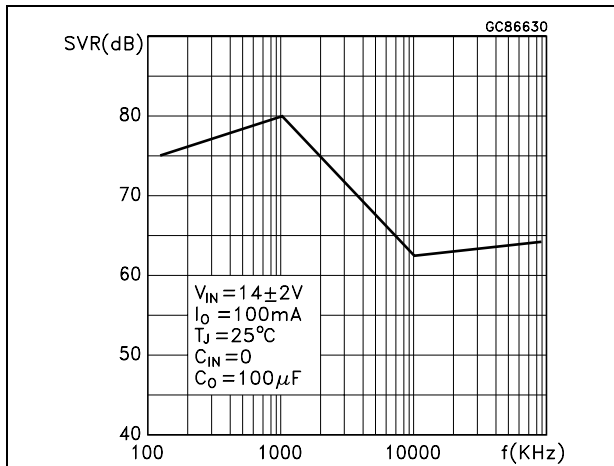


Figure 20. Supply voltage rejection vs. output current

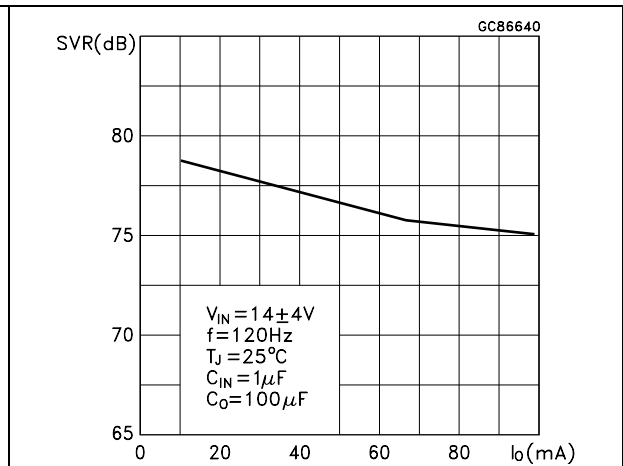


Figure 21. Stability vs. CO

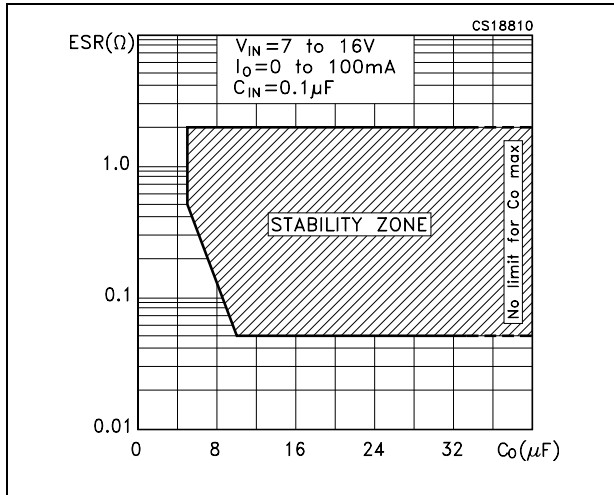


Figure 22. Line transient


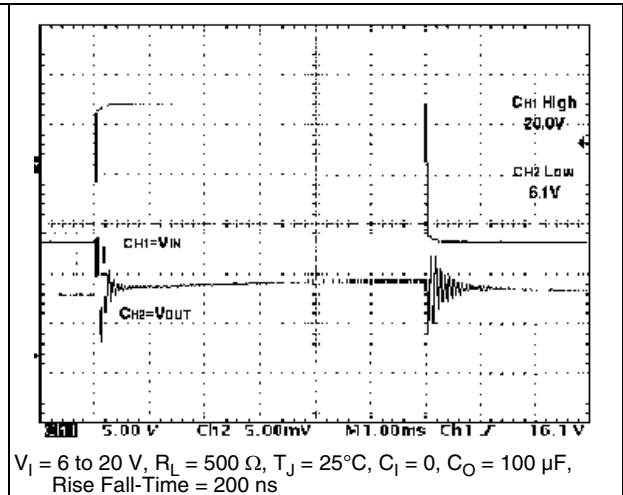


Figure 23. Line transient

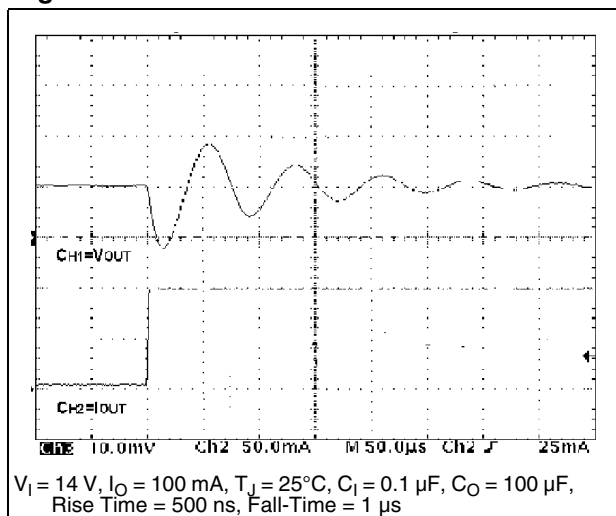


## 7 Package mechanical data

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK<sup>®</sup> packages, depending on their level of environmental compliance. ECOPACK<sup>®</sup> specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK<sup>®</sup> is an ST trademark.


**TO-92 mechanical data**

| Dim.     | mm.  |      |       | mils. |      |       |
|----------|------|------|-------|-------|------|-------|
|          | Min. | Typ. | Max.  | Min.  | Typ. | Max.  |
| A        | 4.32 |      | 4.95  | 170.1 |      | 194.9 |
| b        | 0.36 |      | 0.51  | 14.2  |      | 20.1  |
| D        | 4.45 |      | 4.95  | 175.2 |      | 194.9 |
| E        | 3.30 |      | 3.94  | 129.9 |      | 155.1 |
| e        | 2.41 |      | 2.67  | 94.9  |      | 105.1 |
| e1       | 1.14 |      | 1.40  | 44.9  |      | 55.1  |
| L        | 12.7 |      | 15.49 | 500.0 |      | 609.8 |
| R        | 2.16 |      | 2.41  | 85.0  |      | 94.9  |
| S1       | 0.92 |      | 1.52  | 36.2  |      | 59.8  |
| W        | 0.41 |      | 0.56  | 16.1  |      | 22.0  |
| $\alpha$ |      | 5°   |       |       | 5°   |       |

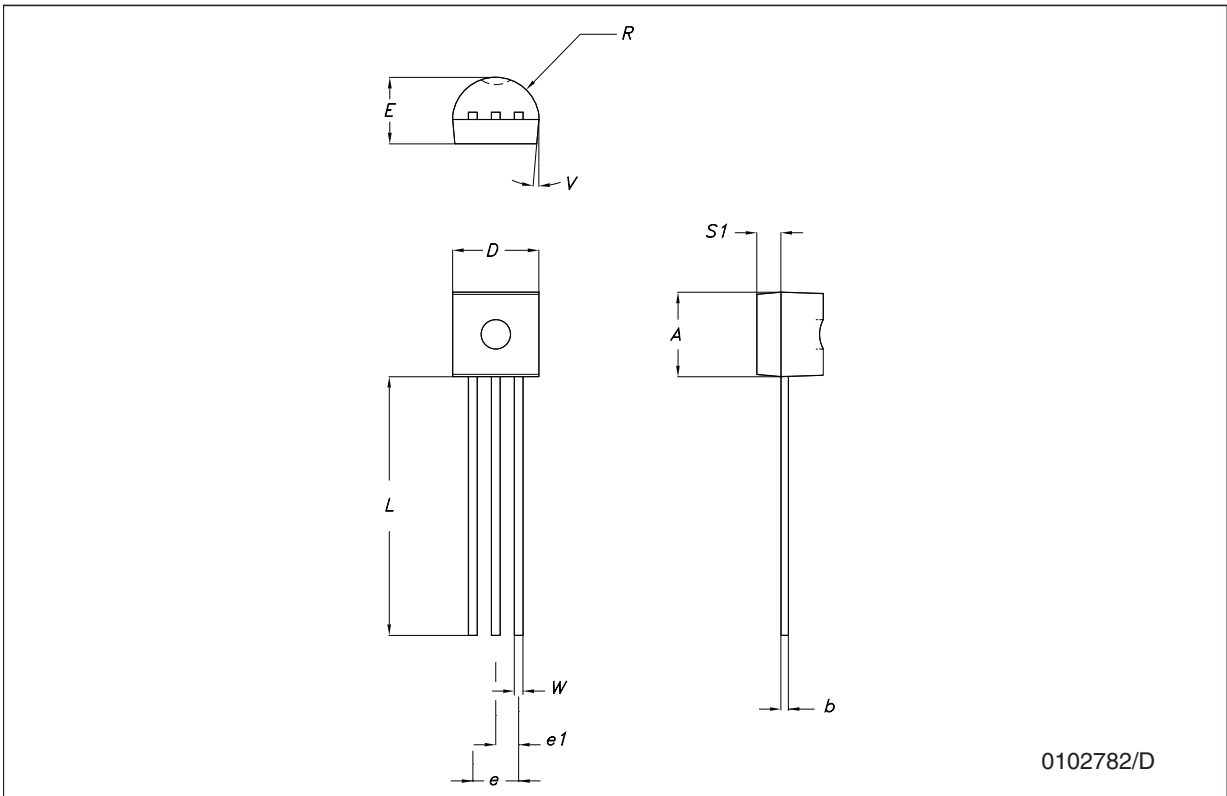

**DPAK mechanical data**

| Dim. | mm.  |      |      | inch. |       |       |
|------|------|------|------|-------|-------|-------|
|      | Min. | Typ. | Max. | Min.  | Typ.  | Max.  |
| A    | 2.2  |      | 2.4  | 0.086 |       | 0.094 |
| A1   | 0.9  |      | 1.1  | 0.035 |       | 0.043 |
| A2   | 0.03 |      | 0.23 | 0.001 |       | 0.009 |
| B    | 0.64 |      | 0.9  | 0.025 |       | 0.035 |
| b4   | 5.2  |      | 5.4  | 0.204 |       | 0.212 |
| C    | 0.45 |      | 0.6  | 0.017 |       | 0.023 |
| C2   | 0.48 |      | 0.6  | 0.019 |       | 0.023 |
| D    | 6    |      | 6.2  | 0.236 |       | 0.244 |
| D1   |      | 5.1  |      |       | 0.200 |       |
| E    | 6.4  |      | 6.6  | 0.252 |       | 0.260 |
| E1   |      | 4.7  |      |       | 0.185 |       |
| e    |      | 2.28 |      |       | 0.090 |       |
| e1   | 4.4  |      | 4.6  | 0.173 |       | 0.181 |
| H    | 9.35 |      | 10.1 | 0.368 |       | 0.397 |
| L    | 1    |      |      | 0.039 |       |       |
| (L1) |      | 2.8  |      |       | 0.110 |       |
| L2   |      | 0.8  |      |       | 0.031 |       |
| L4   | 0.6  |      | 1    | 0.023 |       | 0.039 |
| R    |      | 0.2  |      |       | 0.008 |       |
| V2   | 0°   |      | 8°   | 0°    |       | 8°    |

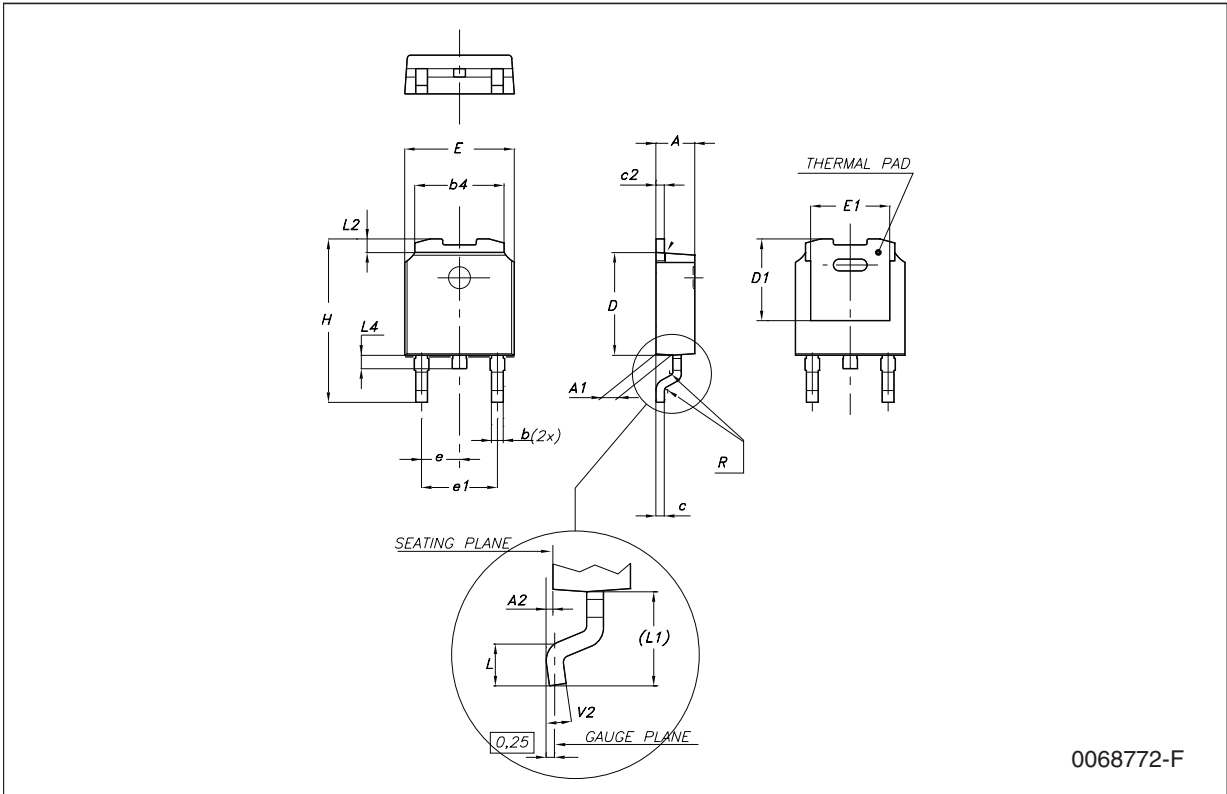


0068772-F




**SO-8 mechanical data**

| Dim. | mm.       |      |      | inch. |       |       |
|------|-----------|------|------|-------|-------|-------|
|      | Min.      | Typ. | Max. | Min.  | Typ.  | Max.  |
| A    | 1.35      |      | 1.75 | 0.053 |       | 0.069 |
| A1   | 0.10      |      | 0.25 | 0.04  |       | 0.010 |
| A2   | 1.10      |      | 1.65 | 0.043 |       | 0.065 |
| B    | 0.33      |      | 0.51 | 0.013 |       | 0.020 |
| C    | 0.19      |      | 0.25 | 0.007 |       | 0.010 |
| D    | 4.80      |      | 5.00 | 0.189 |       | 0.197 |
| E    | 3.80      |      | 4.00 | 0.150 |       | 0.157 |
| e    |           | 1.27 |      |       | 0.050 |       |
| H    | 5.80      |      | 6.20 | 0.228 |       | 0.244 |
| h    | 0.25      |      | 0.50 | 0.010 |       | 0.020 |
| L    | 0.40      |      | 1.27 | 0.016 |       | 0.050 |
| k    | 8° (max.) |      |      |       |       |       |
| ddd  |           |      | 0.1  |       |       | 0.04  |

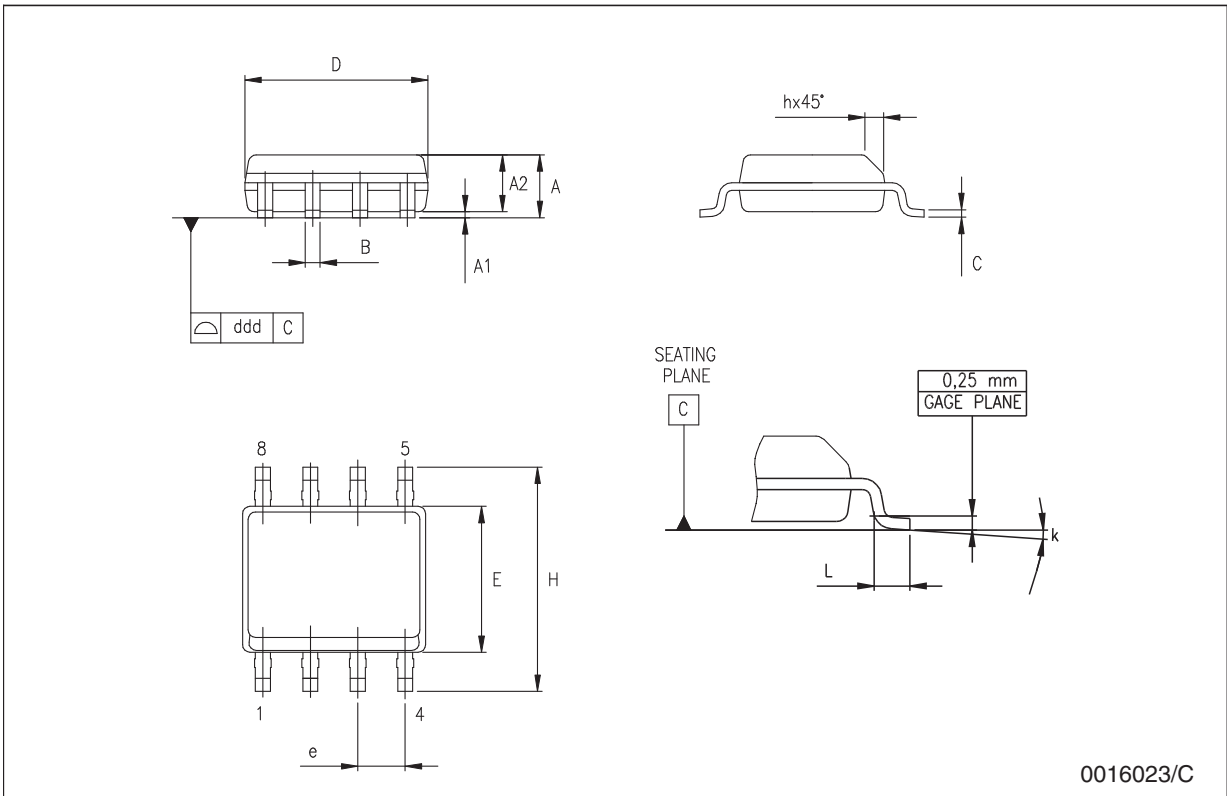


**Tape & reel DPAK-PPAK mechanical data**

| Dim. | mm.   |       |       | inch. |       |        |
|------|-------|-------|-------|-------|-------|--------|
|      | Min.  | Typ.  | Max.  | Min.  | Typ.  | Max.   |
| A    |       |       | 330   |       |       | 12.992 |
| C    | 12.8  | 13.0  | 13.2  | 0.504 | 0.512 | 0.519  |
| D    | 20.2  |       |       | 0.795 |       |        |
| N    | 60    |       |       | 2.362 |       |        |
| T    |       |       | 22.4  |       |       | 0.882  |
| Ao   | 6.80  | 6.90  | 7.00  | 0.268 | 0.272 | 0.276  |
| Bo   | 10.40 | 10.50 | 10.60 | 0.409 | 0.413 | 0.417  |
| Ko   | 2.55  | 2.65  | 2.75  | 0.100 | 0.104 | 0.105  |
| Po   | 3.9   | 4.0   | 4.1   | 0.153 | 0.157 | 0.161  |
| P    | 7.9   | 8.0   | 8.1   | 0.311 | 0.315 | 0.319  |

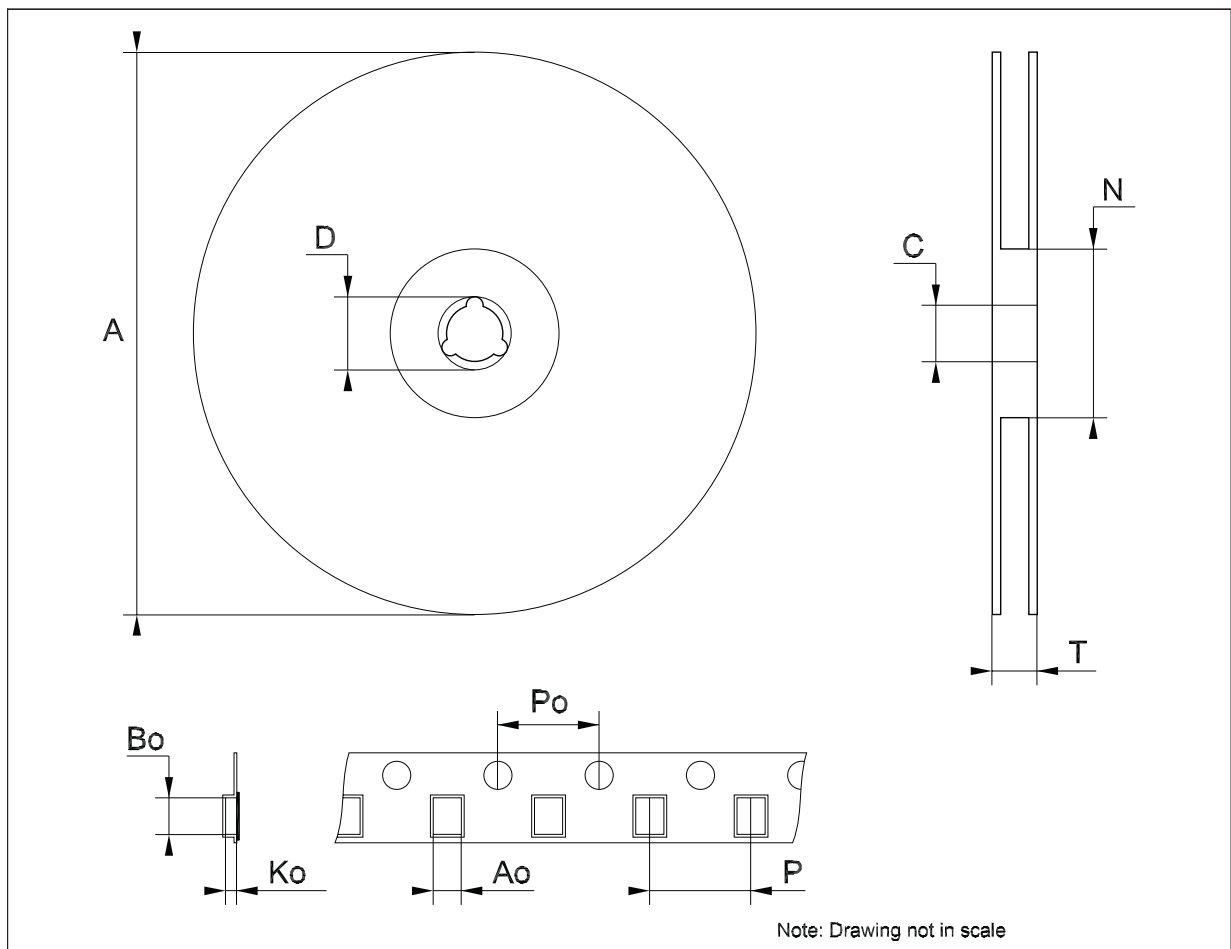

**Tape & reel SO-8 mechanical data**

| Dim. | mm.  |      |      | inch. |      |        |
|------|------|------|------|-------|------|--------|
|      | Min. | Typ. | Max. | Min.  | Typ. | Max.   |
| A    |      |      | 330  |       |      | 12.992 |
| C    | 12.8 |      | 13.2 | 0.504 |      | 0.519  |
| D    | 20.2 |      |      | 0.795 |      |        |
| N    | 60   |      |      | 2.362 |      |        |
| T    |      |      | 22.4 |       |      | 0.882  |
| Ao   | 8.1  |      | 8.5  | 0.319 |      | 0.335  |
| Bo   | 5.5  |      | 5.9  | 0.216 |      | 0.232  |
| Ko   | 2.1  |      | 2.3  | 0.082 |      | 0.090  |
| Po   | 3.9  |      | 4.1  | 0.153 |      | 0.161  |
| P    | 7.9  |      | 8.1  | 0.311 |      | 0.319  |

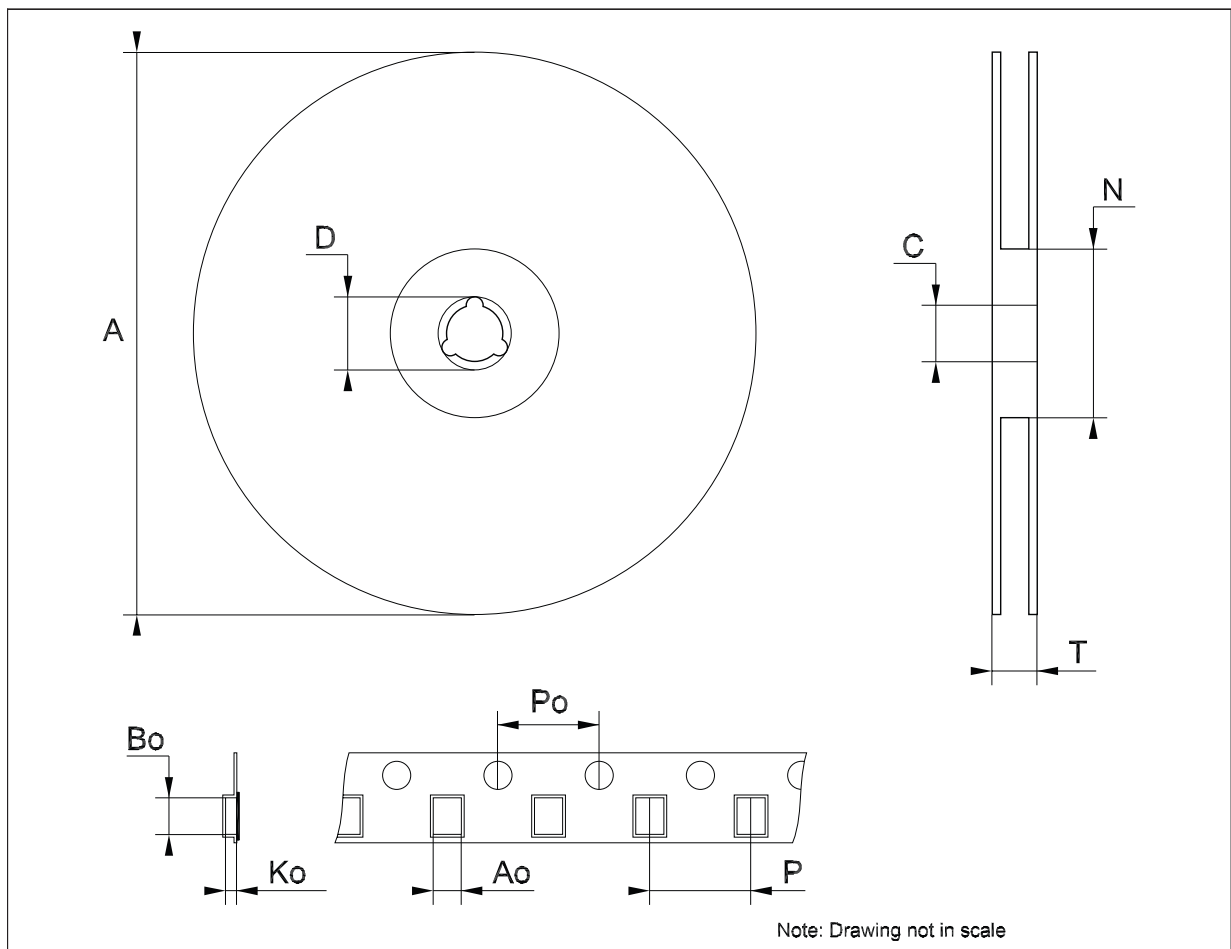

## 8 Revision history

**Table 7. Document revision history**

| Date        | Revision | Changes  |
|-------------|----------|--|
| 21-Jun-2004 | 12       | Document updated.  |
| 16-Jun-2006 | 13       | Order codes updated.   |
| 27-Jul-2007 | 14       | Added <a href="#">Table 1</a> in cover page.   |
| 21-Aug-2007 | 15       | Added root part number - (see <a href="#">Table 1</a> ).   |
| 22-Nov-2007 | 16       | Modified: <a href="#">Table 1</a> .  |
| 11-Feb-2008 | 17       | Modified: <a href="#">Table 1 on page 1</a> .  |
| 10-Jul-2008 | 18       | Removed package TO-220, modified <a href="#">Table 1 on page 1</a> .   |
| 26-May-2010 | 19       | Modified: $V_I$ values <a href="#">Table 4 on page 7</a> , <a href="#">Table 5 on page 8</a> and <a href="#">Table 6 on page 9</a> . |

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2010 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)