

SHINDENGEN

Power Switching Regulators


MA1000 Series

MA1010

OUTLINE DIMENSIONS

Case : MA7

Unit : mm

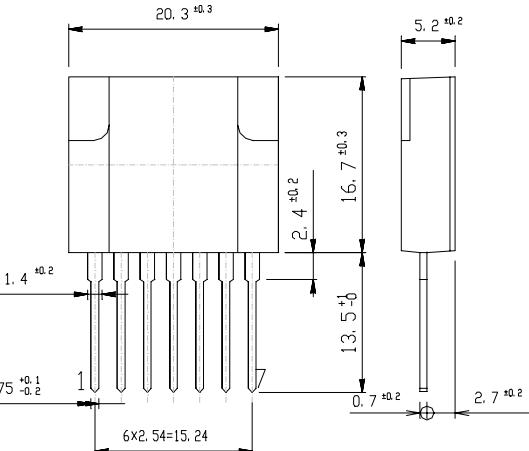

RATINGS

● Absolute Maximum Ratings

Item	Symbol	Conditions	Ratings		Unit
			P Class	N Class	
Storage Temperature	Tstg		-30	~125	°C
Operating Temperature	Top	Case Temperature	-20	~125	°C
Junction Temperature	Tj		150	150	°C
Peak Input Voltage	Vin	(②+,④-,Fig.1 is Measurement Circuit of Peak Input Voltage Vin and Collector Cutoff Current I _{CEx})	500	500	V
Input Current	Iin	Pulse Pulse Width 150 μs MAX, Duty1/2, Sawtooth Wave, Peak Value, (②+,④-)	6	6	A
Maximum Operating Frequency	f(max)		200	200	kH _Z
Maximum Power Dissipation	P _D	Ta=25°C	3	3	W
	P _D	Heatsink Tc=100°C	12	12	W
Dielectric Strength	Vdis	Terminals To Case AC 1 min	2	2	kV
Insulation Resistance		Terminals To Case 500VDC	100	100	MΩ
Fold Back Control Voltage	V _{CONT(max)}	Fold Control Resistance=0Ω Duty 1/2, (④,⑦)	±8	±8	V
Fold Back Control Current	I _{CONT(max)}	(④-,⑥+)	100	100	mA

● Electrical Characteristics (Tc=25°C)

Item	Symbol	Conditions	Ratings		Unit
			P Class	N Class	
Q1	Collector Cutoff Current	I _{CEx} V _{CE} =500V, Fig.1 is Measurement Circuit of Peak Input Voltage Vin and Collector Cutoff Current I _{CEx} , (②+,④-)	MAX 0.1	MAX 0.1	mA
	DC Current Gain	h _{FE} V _{CE} = 5V, I _C = 1.5A, (②+,④-,⑤)I _B	15~30	10~20	
	Collector to Emitter Saturation Voltage	V _{CE(sat)} I _C =1.5A, I _B =0.3A, (②+,④-,⑤)I _B	MAX 1.0	MAX 1.0	V
D1	Thermal Resistance	θ _{jc} Junction to Case	MAX 4.17	MAX 4.17	°C/W
	Reverse Current	I _R V _R =450V, (①+,②-)	MAX 10	MAX 10	μA
	Forward Voltage	V _F I _F =0.6A, (①-,②+)	MAX 1.7	MAX 1.7	V
Driving Saturation Voltage	V _{D(sat)}	I _C =1.5A, I _B =0.3A, (⑤)+, (④)-	MIN 1.7	MIN 1.7	V
			MAX 2.3	MAX 2.3	

● Standard Operating Condition • Design Standard For Application Circuit

Item	Conditions	Ratings		Unit
		P Class	N Class	
Input Rated Voltage		AC90~132	AC90~132	V
Output Nominal Wattage		12	12	W
Output Nominal Voltage		12	12	V
Output Nominal Current		1	1	A

● Standard Operating Condition • Standard Operating Characteristics (Ta=25°C)

Item	Conditions	Ratings		Unit
		P Class	N Class	
Minimum Input Full Load Output Voltage	Vin=90V, I _O =1A	12.0±0.6	12.0±0.6	V
Maximum Input Light Load Output Voltage	Vin=132V, I _O =0.1A	12.0±0.6	12.0±0.6	V
AC Input Voltage	I _O =1A	MAX 85	MAX 85	V
Over Current Protection	Foldback Current	Vin=132V, V _O =10V	MAX 1.5	A
	Short Circuit	Vin=132V, R _O =0.5 Ω	Nodamage To Any Device, Automatic Recovery.	–
Output Ripple Noise	Vin=90~132V, I _O =0.1~1A	MAX 150	MAX 150	mV P-P

Figure in ○=Terminal Sign

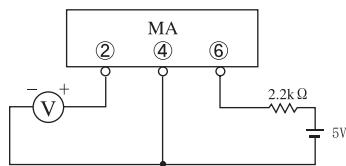


Fig1. Measurement Circuit






Fig2. Output Voltage/Current


MA1010 Transient Thermal Impedance

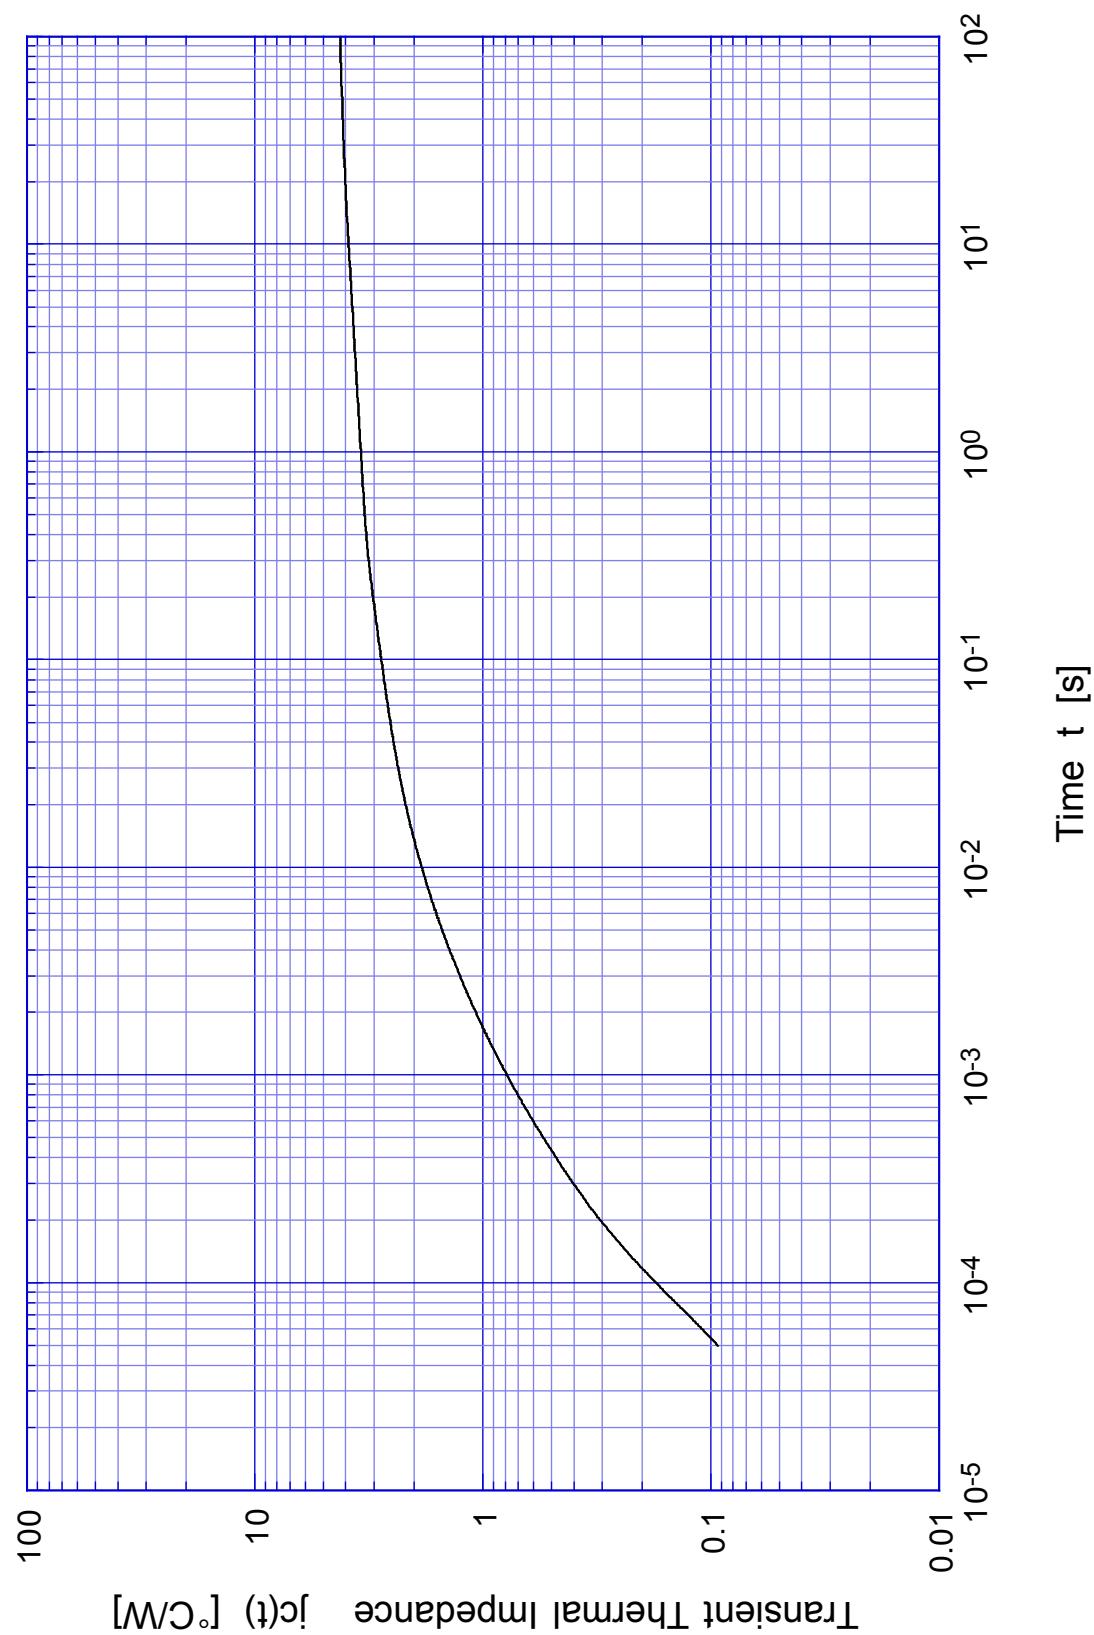

MA1010

Forward Bias SOA

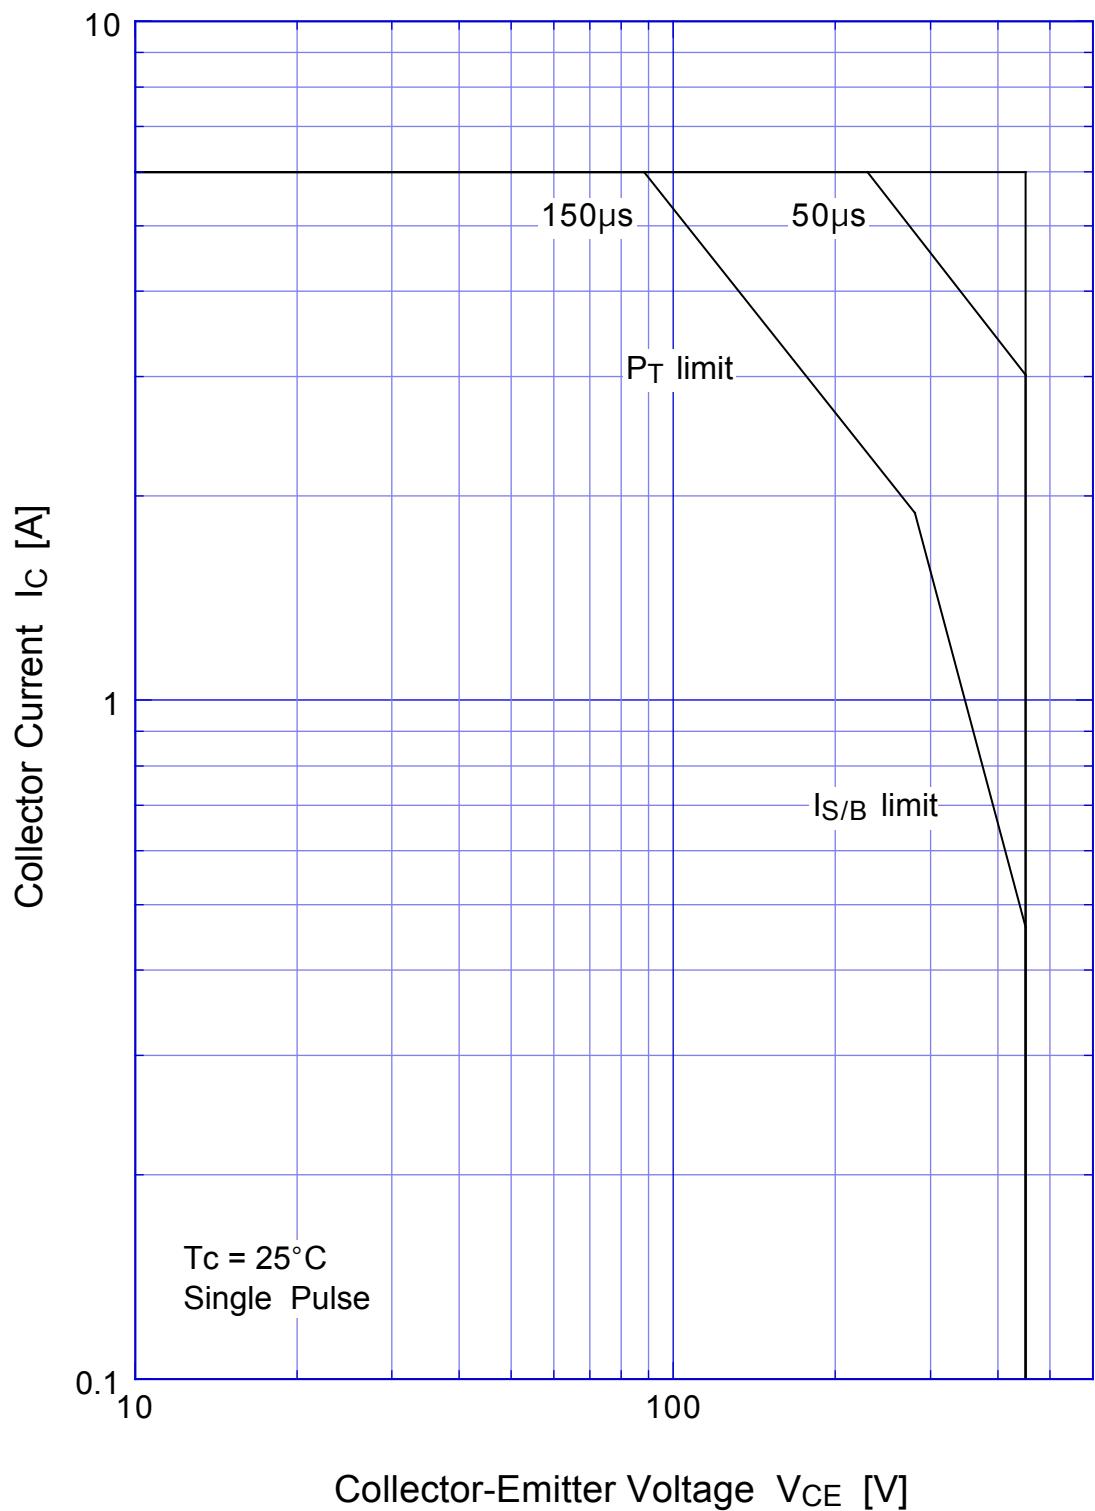

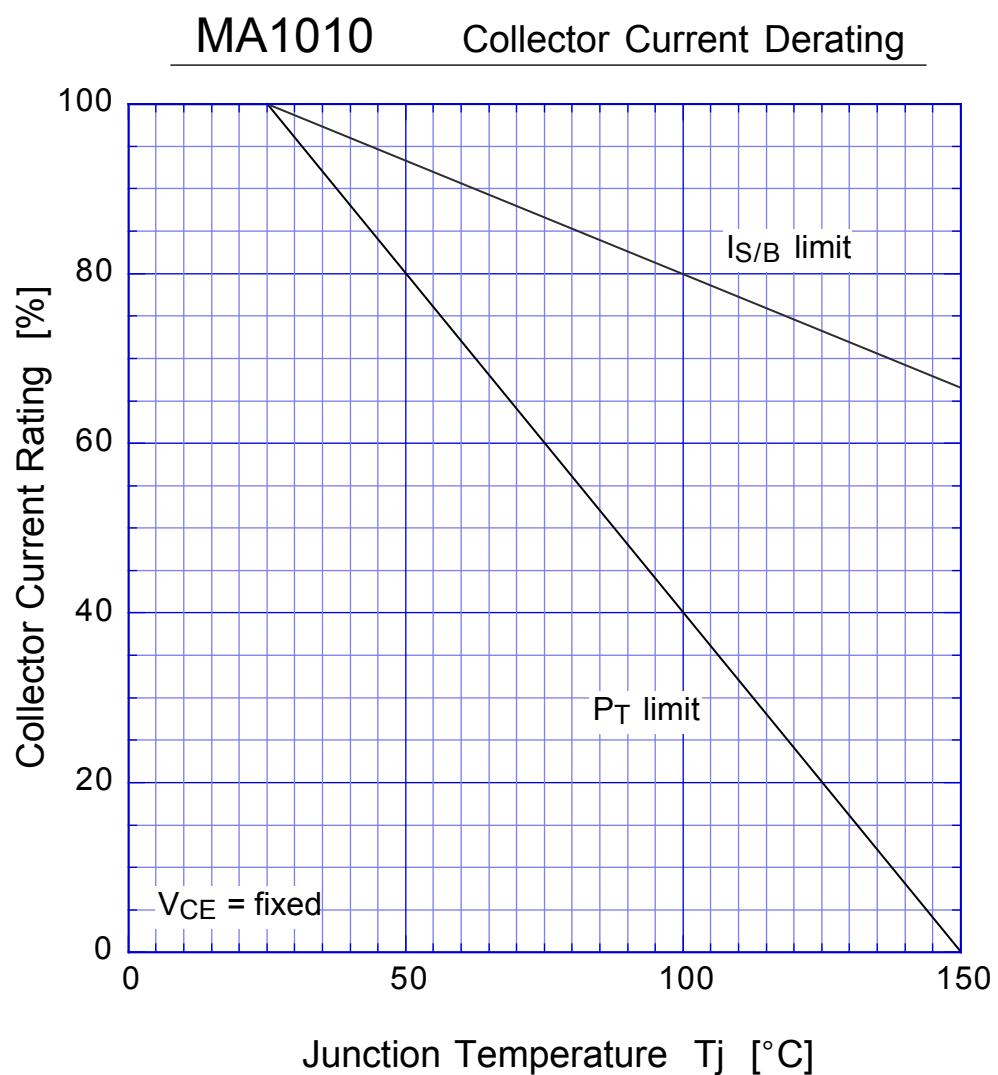

MA1010

Reverse Bias SOA

