


PNP Silicon AF Transistors

- For general AF applications
- High collector current
- High current gain
- Low collector-emitter saturation voltage
- Complementary types: BC 817W, BC 818W (NPN)

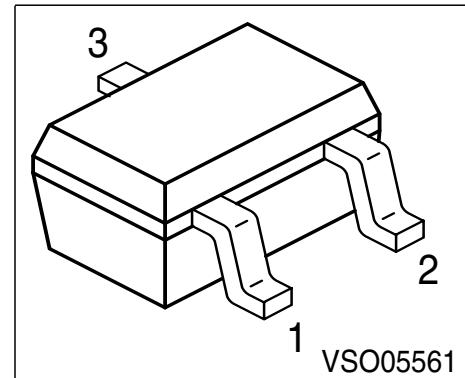

Type	Marking	Pin Configuration			Package
BC 807-16W	5As	1 = B	2 = E	3 = C	SOT-323
BC 807-25W	5Bs	1 = B	2 = E	3 = C	SOT-323
BC 807-40W	5Cs	1 = B	2 = E	3 = C	SOT-323
BC 808-16W	5Es	1 = B	2 = E	3 = C	SOT-323
BC 808-25W	5Fs	1 = B	2 = E	3 = C	SOT-323
BC 808-40W	5Gs	1 = B	2 = E	3 = C	SOT-323

Maximum Ratings

Parameter	Symbol	BC 807W	BC 808W	Unit
Collector-emitter voltage	V_{CEO}	45	25	V
Collector-base voltage	V_{CBO}	50	30	
Emitter-base voltage	V_{EBO}	5	5	
DC collector current	I_C	500		mA
Peak collector current	I_{CM}	1		A
Base current	I_B	100		mA
Peak base current	I_{BM}	200		
Total power dissipation, $T_S = 130^\circ\text{C}$	P_{tot}	250		mW
Junction temperature	T_j	150		$^\circ\text{C}$
Storage temperature	T_{stg}	-65 ... 150		

Thermal Resistance

Junction ambient 1)	R_{thJA}	≤ 215	K/W
Junction - soldering point	R_{thJS}	≤ 80	

1) Package mounted on pcb 40mm x 40mm x 1.5mm / 0.5cm² Cu

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Collector-emitter breakdown voltage $I_C = 10 \text{ mA}, I_B = 0$	$V_{(\text{BR})\text{CEO}}$ BC 807W	45	-	-	V
		25	-	-	
Collector-base breakdown voltage $I_C = 10 \mu\text{A}, I_B = 0$	$V_{(\text{BR})\text{CBO}}$ BC 807W	50	-	-	
		30	-	-	
Emitter-base breakdown voltage $I_E = 10 \mu\text{A}, I_C = 0$	$V_{(\text{BR})\text{EBO}}$	5	-	-	
		-	-	-	
Collector cutoff current $V_{CB} = 25 \text{ V}, I_E = 0$	I_{CBO}	-	-	100	nA
Collector cutoff current $V_{CB} = 25 \text{ V}, I_E = 0, T_A = 150 \text{ }^\circ\text{C}$	I_{CBO}	-	-	50	μA
Emitter cutoff current $V_{EB} = 4 \text{ V}, I_C = 0$	I_{EBO}	-	-	100	nA
DC current gain 1) $I_C = 100 \text{ mA}, V_{CE} = 1 \text{ V}$	h_{FE} 16 25 40	100	160	250	-
		160	250	400	
		250	350	630	
		-	-	-	
DC current gain 1) $I_C = 300 \text{ mA}, V_{CE} = 1 \text{ V}$	h_{FE} 16 25 40	60	-	-	
		100	-	-	
		170	-	-	
		-	-	-	
Collector-emitter saturation voltage1) $I_C = 500 \text{ mA}, I_B = 50 \text{ mA}$	V_{CEsat}	-	-	0.7	V
Base-emitter saturation voltage 1) $I_C = 500 \text{ mA}, I_B = 50 \text{ mA}$	V_{BEsat}	-	-	1.2	V


1) Pulse test: $t \leq 300\mu\text{s}$, $D = 2\%$

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified.


Parameter	Symbol	Values			Unit
		min.	typ.	max.	
AC Characteristics					
Transition frequency $I_C = 50 \text{ mA}, V_{CE} = 5 \text{ V}, f = 100 \text{ MHz}$	f_T	-	200	-	MHz
Collector-base capacitance $V_{CB} = 10 \text{ V}, f = 1 \text{ MHz}$	C_{cb}	-	10	-	pF
Emitter-base capacitance $V_{EB} = 0.5 \text{ V}, f = 1 \text{ MHz}$	C_{eb}	-	60	-	

Total power dissipation $P_{\text{tot}} = f(T_A^*; T_S)$

* Package mounted on epoxy

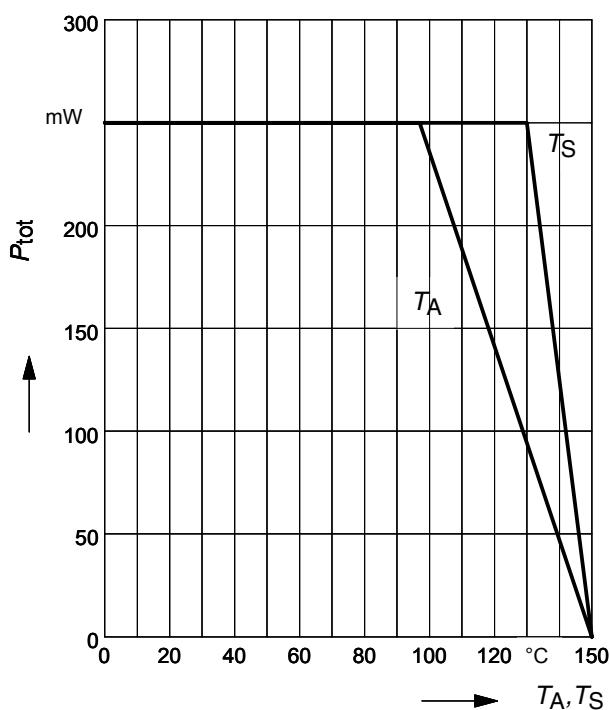


Permissible Pulse Load $R_{\text{thJS}} = f(t_p)$

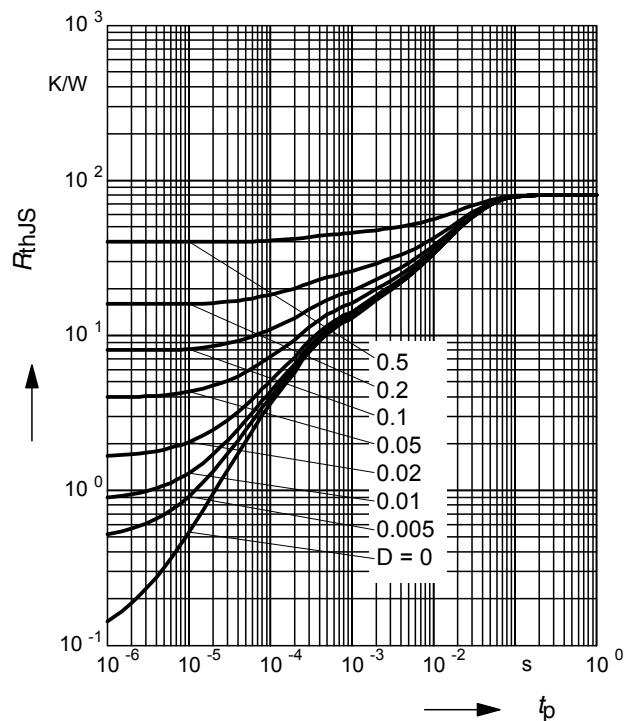


Permissible Pulse Load

$P_{\text{totmax}} / P_{\text{totDC}} = f(t_p)$

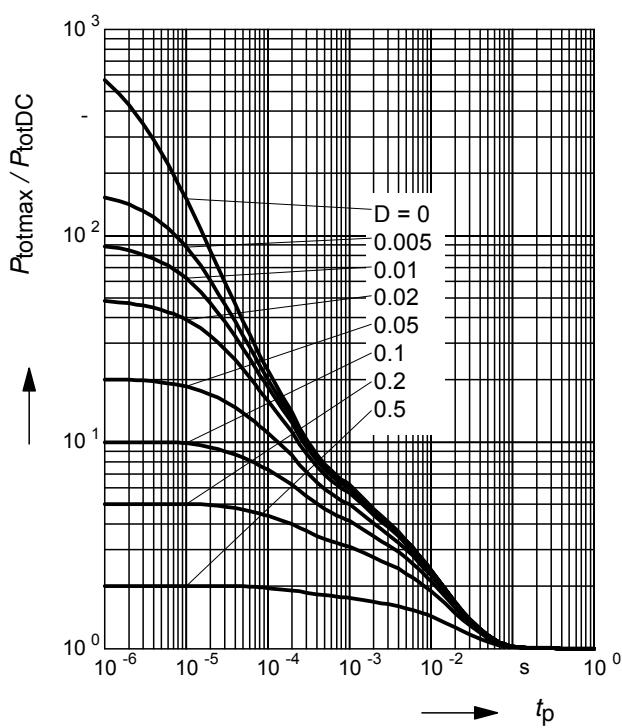


Collector cutoff current $I_{\text{CBO}} = f(T_A)$

$V_{\text{CB}} = 25\text{V}$

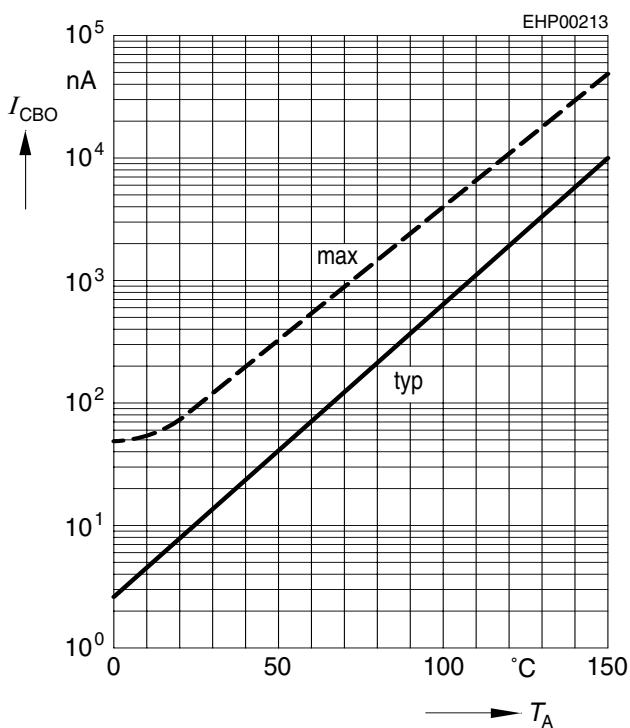


DC current gain $h_{FE} = f(I_C)$

$V_{CE} = 1V$

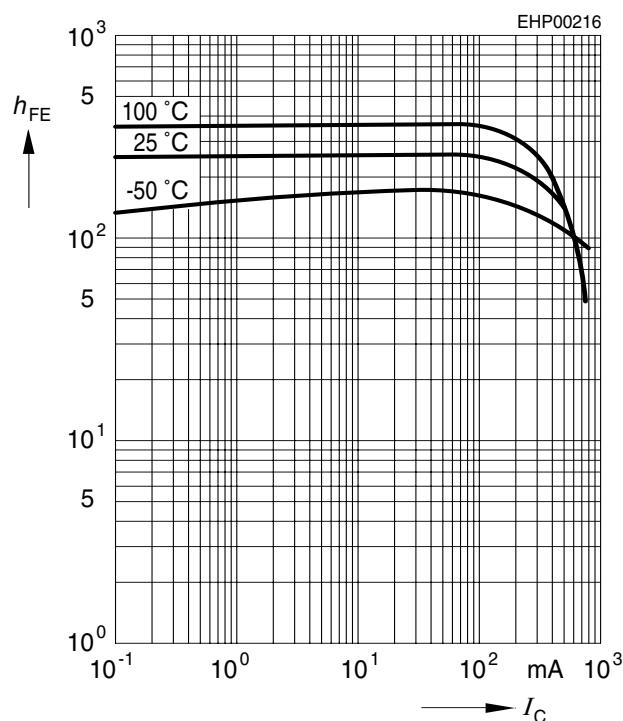


Base-emitter saturation voltage

$I_C = f(V_{BEsat})$, $h_{FE} = 10$

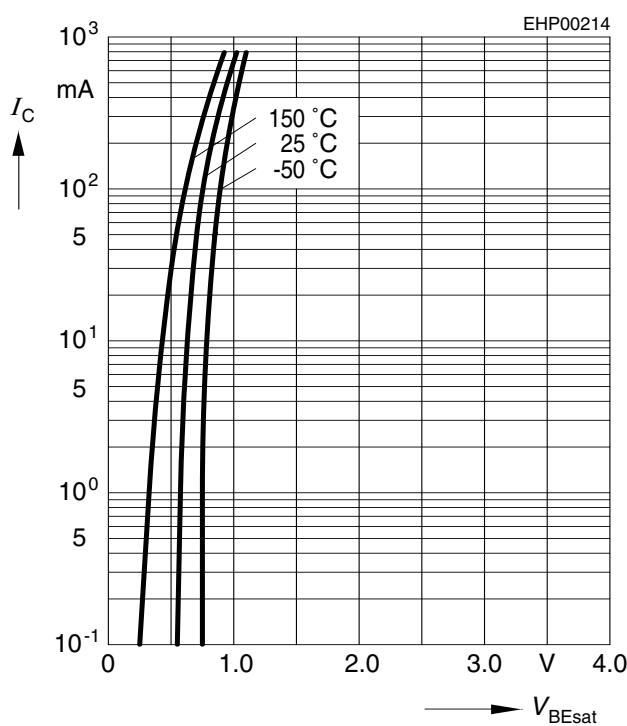

Transition frequency $f_T = f(I_C)$

$V_{CE} = 5V$

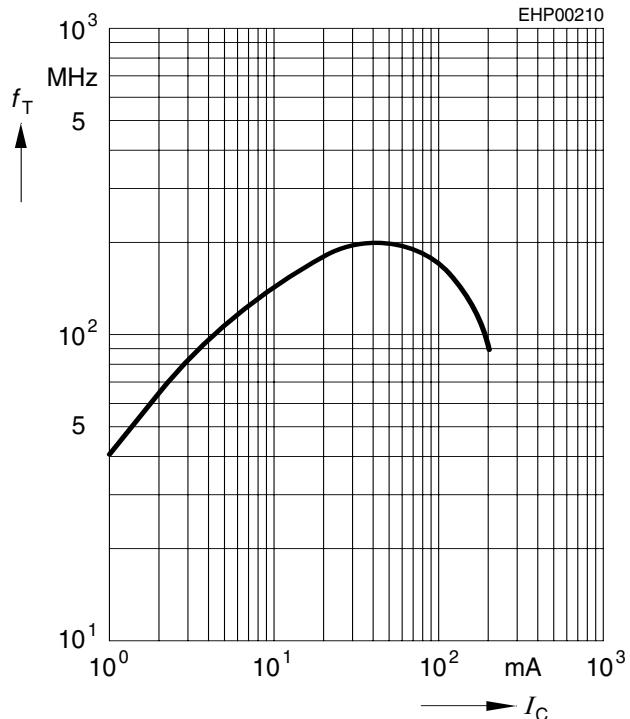

Collector-emitter saturation voltage

$I_C = f(V_{CEsat})$, $h_{FE} = 10$

