

### FEATURES

- **Compact (half-size).**

The base area is approximately half the size of conventional (JS-M) relays. The controller unit can be made more compact.

Base area has been reduced by one half


- **Standard terminal pitch employed**

The terminal array used is identical to that used in small automotive relays.


- **Plastic sealed type.**

Plastically sealed for automatic cleaning.

- **Line-up of 1 Form A and 1 Form C.**



mm inch



- **Perfect for automobile electrical systems.**

Over  $2 \times 10^5$  openings possible with a 14 V DC motor load, an inrush current of 25 A, and steady state current of 5 A. (N.O. side)

### TYPICAL APPLICATIONS

- Power windows
- Auto door lock
- Electrically powered sun roof
- Electrically powered mirror
- Cornering lamp, etc.

Compliance with RoHS Directive

### SPECIFICATIONS

Contact			1 Form A	1 Form C
Arrangement			1 Form A	1 Form C
Contact material			Ag alloy (Cadmium free)	
Initial contact resistance (Initial) (By voltage drop 6V DC 1A)			Typ. 5 mΩ	
Rating (resistive load)	Nominal switching capacity	20 A 14 V DC	20 A 14 V DC (N.O.)	10 A 14 V DC (N.C.)
	Min. switching capacity <sup>#1</sup>	1 A 12 V DC		
	Max. carrying current	N.O.: 35 A (12V, at 20°C 68°F for 2 minutes) 25 A (12V, at 20°C 68°F for 1 hour) 30 A (12V, at 85°C 185°F for 2 minutes) 20 A (12V, at 85°C 185°F for 1 hour)		
Expected life (min. operations)	Mechanical (at 120cpm)		10 <sup>7</sup>	
	Electrical (at rated load)	Resistive	10 <sup>5</sup> * <sub>1</sub>	10 <sup>5</sup> (N.O.)* <sub>2</sub> 10 <sup>5</sup> (N.C.)* <sub>3</sub>
		Motor load	2×10 <sup>5</sup> * <sub>4</sub> 5×10 <sup>4</sup> * <sub>5</sub>	2×10 <sup>5</sup> (N.O.)* <sub>6</sub> 5×10 <sup>4</sup> (N.O.)* <sub>7</sub> 2×10 <sup>5</sup> (N.C.)* <sub>8</sub>

Coil	
Nominal operating power	640 mW

#1 This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.

#### Remarks

- \*<sub>1</sub> at 20 A 14 V DC, at 20 cpm, operating frequency: 1s ON, 9s OFF
- \*<sub>2</sub> at 20 A 14 V DC, operating frequency: 1s ON, 9s OFF
- \*<sub>3</sub> at 10 A 14 V DC, at 20 cpm, operating frequency: 1s ON, 9s OFF
- \*<sub>4</sub> at 5 A (steady), 25 A (inrush) 14 V DC
- \*<sub>5</sub> at 20 A 14 V DC (Motor lock), operating frequency: 0.5 s ON, 9.5 s OFF
- \*<sub>6</sub> at 5A (steady), 25 A (inrush) 14 V DC

#### Characteristics

Max. operating speed (at rated load)		6 cpm
Initial insulation resistance* <sub>9</sub>		Min. 100 MΩ (at 500 V DC)
Initial breakdown voltage* <sub>10</sub>	Between open contacts	500 Vrms for 1min.
	Between contact and coil	500 Vrms for 1min.
Operate time* <sub>11</sub> (at nominal voltage)		Max. 10 ms (at 20°C 68°F)
Release time (without diode)* <sub>11</sub> (at nominal voltage) (Initial)		Max. 10 ms (at 20°C 68°F)
Shock resistance	Functional* <sub>12</sub>	Min. 100 m/s <sup>2</sup> {10 G}
	Destructive* <sub>13</sub>	Min. 1,000 m/s <sup>2</sup> {100 G}
Vibration resistance	Functional* <sub>14</sub>	10 Hz to 100 Hz, Min. 44.1 m/s <sup>2</sup> {4.5 G}
	Destructive	10 Hz to 500 Hz, Min. 44.1 m/s <sup>2</sup> {4.5 G}
Conditions in case of operation, transport and storage* <sub>15</sub> (Not freezing and condensing at low temperature)	Ambient temp.	-40°C to +85°C -40°F to +185°F
	Humidity	5% R.H. to 85% R.H.
Mass		Approx. 5 g .176 oz

\*<sub>7</sub> at 20 A 14 V DC (Motor lock)

\*<sub>8</sub> at peak 20 A 14 V DC (Braking current) operating frequency: 0.5 s ON, 9.5 s OFF

\*<sub>9</sub> Measurement at same location as "Initial break down voltage" section.

\*<sub>10</sub> Detection current: 10mA

\*<sub>11</sub> Excluding contact bounce time.

\*<sub>12</sub> Half-wave pulse of sine wave: 11 ms; detection time: 10 μs


\*<sub>13</sub> Half-wave pulse of sine wave: 6 ms

\*<sub>14</sub> Detection time: 10 μs

\*<sub>15</sub> Refer to Conditions for operation, transport and storage mentioned in AMBIENT ENVIRONMENT  
Please inquire if you will be using the relay in a high temperature atmosphere (110°C 230°F).

## ORDERING INFORMATION

Ex. JJM



Contact arrangement	Coil voltage(DC)
1a: 1 Form A 1: 1 Form C	12 V

(Note) Standard packing: Carton: 50 pcs.; Case: 1,000 pcs.


## TYPES AND COIL DATA (at 20°C 68°F)

Contact arrangement	Part No.	Nominal voltage, V DC	Pick-up voltage, V DC (Initial)	Drop-out voltage, V DC (Initial)	Coil resistance Ω	Nominal operating current mA	Nominal operating power mW	Usable voltage range, V DC
1 Form A	JJM1a-12 V	12	Max. 7.2	Min. 1.0	225±10%	53.3±10%	640	10 to 16
1 Form C	JJM1-12 V	12	Max. 7.2	Min. 1.0	225±10%	53.3±10%	640	10 to 16

\* Other pick-up voltage types are also available. Please contact us for details.

## DIMENSIONS


mm inch

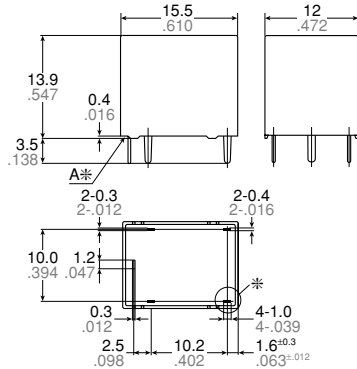


Note: \*Marked terminal is only for 1Form C type

\* Dimensions (thickness and width) of terminal specified in this catalog is measured before pre-soldering. Intervals between terminals is measured at A surface level.


Schematic (Bottom view)




1c



PC board pattern (Bottom view)



1c




Tolerance: ±0.1 ±.004

<b>Dimension:</b>	<b>General tolerance</b>
Max. 1mm .039 inch:	±0.1 ±.004
1 to 3mm .039 to .118 inch:	±0.2 ±.008
Min. 3mm .118 inch:	±0.3 ±.012


## REFERENCE DATA

### 1. Coil temperature rise


Sample: JJM1-12V, 6pcs  
Point measured: Inside the coil  
Contact current: Now current through contact, 5A, 10A, 15A, 20A  
Resistance method, ambient temperature 85°C 185°F

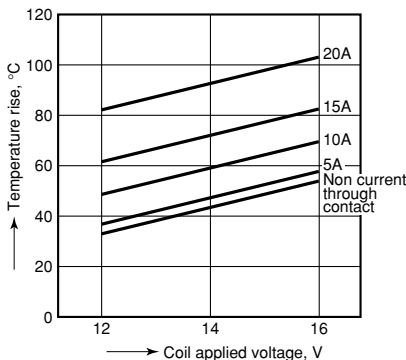

### 2. Max. switching capability (Resistive load)

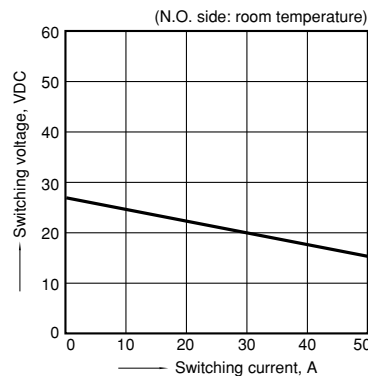


### 3. Ambient temperature and operating voltage range

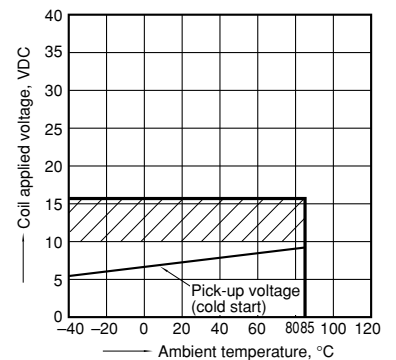

# JJ-M


## 4. Distribution of pick-up and drop-out voltage

Sample: JJM1-12V, 100pcs

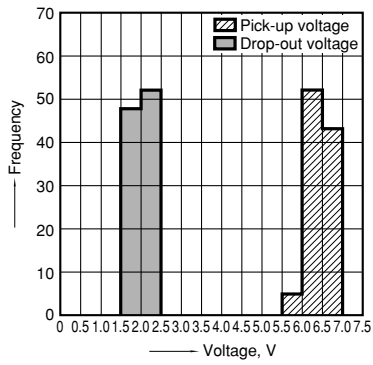

## 5. Distribution of operate time


Sample: JJM1-12V, 100pcs

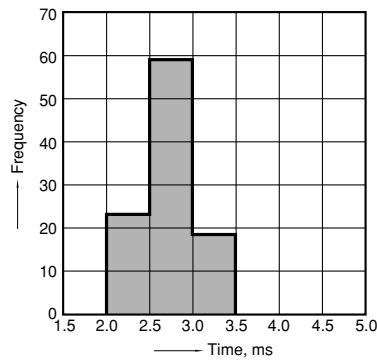

## 6. Distribution of release time

Sample: JJM1-12V, 100pcs

\* With diode

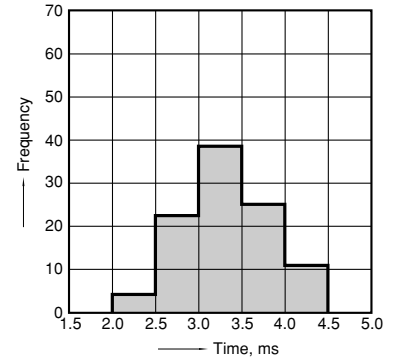


## 7-(1). Electrical life test (at rated load)

Sample: JJM1-12V

Quantity: n = 6 (NC = 3, NO = 3)

Load: Resistive load (NC side: 10A 14V DC, NO side: 20A 14V DC); Operating frequency: ON 1s, OFF 9s

Ambient temperature: Room temperature

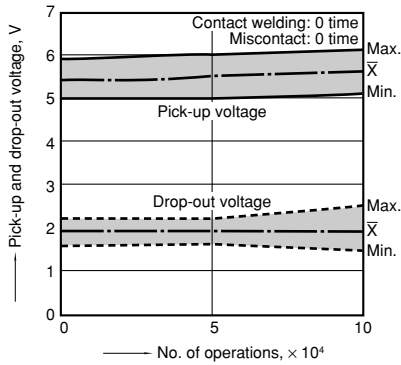

## 7-(2). Electrical life test (Motor free)

Sample: JJM1-12V, 6pcs.


Load: 5A, Inrush 25A, Brake current 18A 14V DC,

Power window motor load (Free condition).


Operating frequency: (ON : OFF = 0.5s : 9.5s)

Ambient temperature: Room temperature


Circuit :

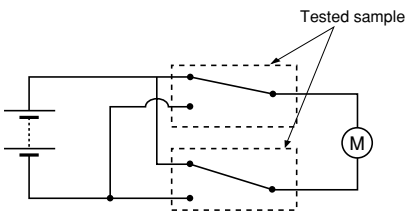

## Change of pick-up and drop-out voltage

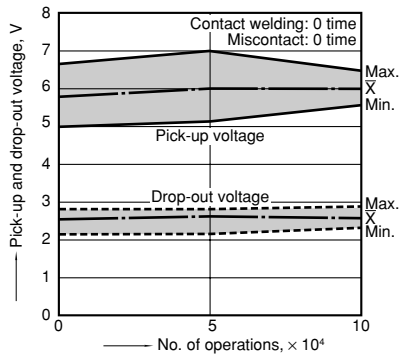

## Change of contact resistance

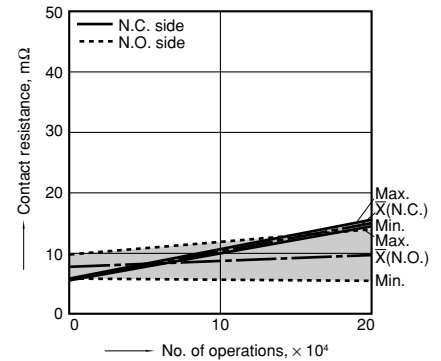

## 7-(3). Electrical life test (Motor lock)

Sample: JJM1-12V, 6pcs.


Load: 20A, 14VDC,

Power window motor actual load (lock condition).


Operating frequency: (ON : OFF = 1s : 5s)

Ambient temperature: Room temperature


Circuit :

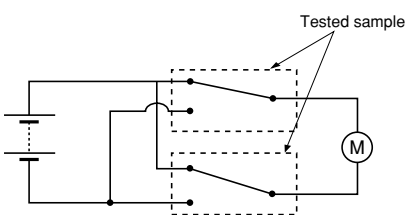

## Change of pick-up and drop-out voltage

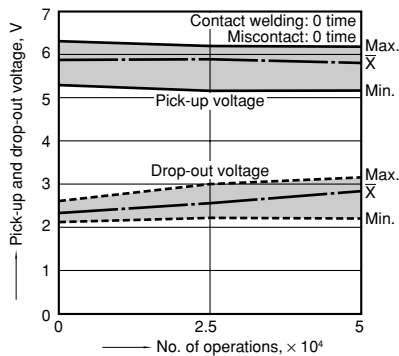


## Change of contact resistance

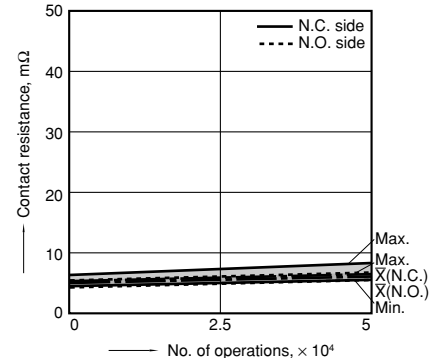


7-(4). Electrical life test (Lamp load)

Sample: JJM1-12V, 6pcs.  
 Load: 27W+21W, min. 4A (steady), Lamp actual load  
 Operating frequency: ON 2s, OFF 13s  
 Ambient temperature: Room temperature


Circuit :




Inrush current: 42A, Steady current: 4.4A

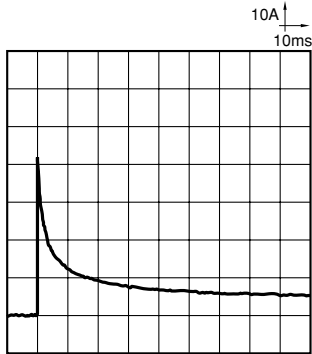

Change of pick-up and drop-out voltage

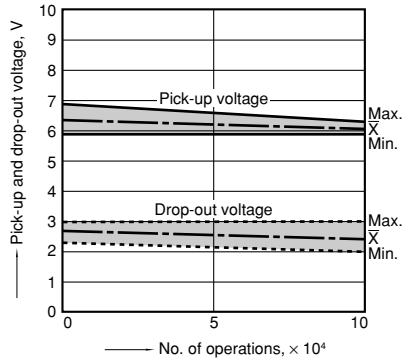

Change of contact resistance

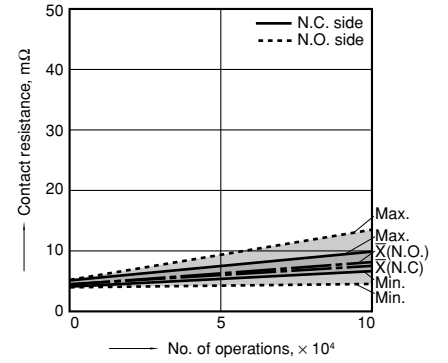

**For Cautions for Use, see Relay Technical Information .**