



SPX1202

600mA Low Dropout NPN Voltage Regulator

FEATURES

- Guaranteed 600mA Output
- Three Terminal Adjustable Or Fixed 1.5V, 2.5V, 3V, 3.3V & 5V
- Very Low Quiescent Current
- Low Dropout Voltage Of 1.2 Volts At Full Load
- Extremely Tight Load And Line Regulation
- Very Low Temperature Coefficient
- Logic-Controlled Electronic Shutdown
- Internal Overcurrent Limiting & Thermal Overload Protection
- Surface Mount Package SOT-223, TO-263, TO-252, TO-220 & SO-8

APPLICATIONS


- Portable/ Palm Top / Notebook Computers
- Battery Chargers
- Disk Drives
- Portable Consumer Equipment
- Portable Instrumentation
- SMPS Post-Regulator

PRODUCT DESCRIPTION

The SPX1202 is a low power positive-voltage regulator designed to meet 600mA output current. This device is an excellent choice for use in battery-powered applications, as active terminators for the SCSI bus, and portable computers. The SPX1202 features very low quiescent current and very low dropout voltage of 1.2V at a full load and lower as output current decreases. This product is available as an adjustable or fixed 3V, 3.3V, and 5V output voltages.

The SPX1202 is offered in a 3-pin surface mount package SOT-223, TO-252, TO-220 & TO-263. The output capacitor of 10 μ F or larger is needed for output stability of SPX1202 as required by most of the other regulator circuits.

PIN CONNECTIONS

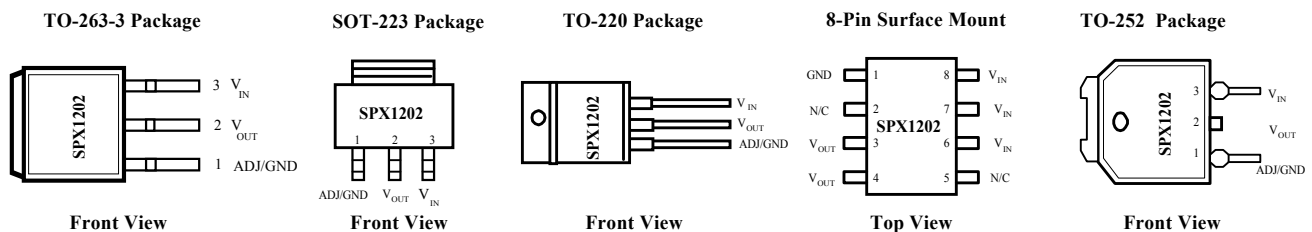

ABSOLUTE MAXIMUM RATINGS

Power Dissipation.....	Internally Limited
Lead Temp. (Soldering, 5 Seconds)	260°C
Storage Temperature Range	-65° to +150°C
Operating Junction Temperature Range	
SPX1202.....	-40C° to +125°C

Input Supply Voltage	-20V to +20V
ESD Rating	2KV Min

ELECTRICAL CHARACTERISTICS at $V_{IN} = V_{OUT} + 1$, $T_a = 25^\circ\text{C}$, $CL = 3.3\mu\text{f}$, unless otherwise specified. Limits in **Boldface** apply over the full operating temperature range.

Parameter	Conditions	Typ	SPX1202		Units
			Min	Max	
1.5V Version					
Output Voltage	$I_{OUT} = 10\text{mA}$, $V_{IN} = 5.00\text{V}$ $0 \leq I_{OUT} \leq 600\text{mA}$, $4.50 \leq V_{IN} \leq 10\text{V}$	1.500	1.485 1.470	1.515 1.530	V
2.5V Version					
Output Voltage	$I_{OUT} = 10\text{mA}$, $V_{IN} = 5.00\text{V}$ $0 \leq I_{OUT} \leq 600\text{mA}$, $4.50 \leq V_{IN} \leq 10\text{V}$	2.500	2.475 2.450	2.525 2.550	V
3.0V Version					
Output Voltage	$I_{OUT} = 10\text{mA}$, $V_{IN} = 5.00\text{V}$ $0 \leq I_{OUT} \leq 600\text{mA}$, $4.50 \leq V_{IN} \leq 10\text{V}$	3.000	2.970 2.940	3.030 3.060	V
3.3 V Version					
Output Voltage	$I_{OUT} = 10\text{mA}$, $V_{IN} = 5.00\text{V}$ $0 \leq I_{OUT} \leq 600\text{mA}$, $4.50 \leq V_{IN} \leq 10\text{V}$	3.300	3.267 3.234	3.333 3.366	V
5.0V Version					
Output Voltage	$I_{OUT} = 10\text{mA}$, $V_{IN} = 5.00\text{V}$ $0 \leq I_{OUT} \leq 600\text{mA}$, $4.50 \leq V_{IN} \leq 10$	5.000	4.950 4.900	5.050 5.100	V
All Output Voltage					
Reference Voltage	$I_{OUT} = 10\text{mA}$, $(V_{IN} - V_{IN}) = 2\text{V}$ $10 \leq I_{OUT} \leq 600\text{mA}$, $1.4 \leq (V_{IN} - V_{IN}) \leq 10\text{V}$	1.250	1.238 1.225	1.262 1.270	V
Output Voltage Temperature Stability	(Note 1)			0.05	%
Line Regulation	$4.50\text{V} \leq V_{IN} \leq 12\text{V}$, $V_{OUT} = 3.00$, $I_{OUT} = 0$ $4.80\text{V} \leq V_{IN} \leq 12\text{V}$, $V_{OUT} = 3.30$, $I_{OUT} = 0$ $6.50\text{V} \leq V_{IN} \leq 15\text{V}$, $V_{OUT} = 5.00$, $I_{OUT} = 0$	1.00 1.00 1.00		7.00 7.00 10.00	mV
Load Regulation	$0 \leq I_{OUT} \leq 600\text{mA}$, $V_{IN} = 4.50\text{V}$, $V_{OUT} = 3.00$ $0 \leq I_{OUT} \leq 600\text{mA}$, $V_{IN} = 4.80\text{V}$, $V_{OUT} = 3.30$ $0 \leq I_{OUT} \leq 600\text{mA}$, $V_{IN} = 6.50\text{V}$, $V_{OUT} = 5.00$	1.00 1.00 1.00		12.00 12.00 15.00	mV
Dropout Voltage (Note 2)	$I_L = 100\text{mA}$ $I_L = 600\text{mA}$	1.00 1.05		1.10 1.15	V
Quiescent Current	$4.25\text{V} \leq V_{IN} \leq 6.5\text{V}$	5.00		10.00	mA
Current Limit	$(V_{IN} - V_{OUT}) = 5\text{V}$	850		1000	mA
Thermal Regulation	25°C , 30mS Pulse	0.01		0.1	%/W
Ripple Rejection	$f_{RIPPLE} = 120\text{Hz}$, $(V_{IN} - V_{OUT}) = 3\text{V}$, $V_{RIPPLE} = 1\text{V}_{p-p}$	60		75	dB
Long Term Stability	125°C , 1000Hrs			0.03	%
RMS Output Noise	% of V_{OUT} , $10\text{Hz} \leq f \leq 10\text{kHz}$			0.003	%
Thermal Resistance	Junction to case, at tab			15	$^\circ\text{C}/\text{W}^\circ$

Note 1: Output temperature coefficient is defined as the worst case voltage change divided by the total temperature range

Note 2: Dropout voltage is defined as the input to output differential at which the output voltage drops 100mV below its nominal value measured at 1V differential at very low values of programmed output voltage, the minimum input supply voltage of 2V (2.3V over temperature) must be taken into account.

Note 3: Thermal regulation is defined as the change in output voltage at a time T after a change in power dissipation is applied. excluding loads or line regulation effect

APPLICATION NOTES EXTERNAL CAPACITOR

To ensure the stability of the SPX1202 an output capacitor of at least 10µF (tantalum) or 50µF (aluminum) is required. The value may change based on the application requirements on the output load or temperature range. The capacitor equivalent series resistance (ESR) will effect the SPX1202 stability. The value of ESR can vary from the type of capacitor used in the applications. The recommended value for ESR is 0.5Ω. The output capacitance could increase in size to above the minimum value. The larger value of output capacitance as high as 100µF can improve the load transient response.

SOLDERING METHODS

The SPX1202 SOT-223 package is designed to be compatible with infrared reflow or vapor-phase reflow soldering techniques. During soldering the non-active or mildly active fluxes may be used. The SPX1202 die is attached to the heatsink lead which exits opposite the input, output, and ground pins.

Hand soldering and wave soldering should be avoided since these methods can cause damage to the device with excessive thermal gradients on the package. The SOT-223 recommended soldering method are as follows: vapor phase reflow and infrared reflow with the component preheated to within 65°C of the soldering temperature range.

THERMAL CHARACTERISTICS

The thermal resistance of SPX1202 is 15°C/W from junction to tab and 31 °C/W from tab to ambient for a total of 46 °C/W from junction to ambient. The SPX1202 features the internal thermal limiting to protect the device during overload conditions. Special care needs to be taken during continuous load conditions the maximum junction temperature does not exceed 125 °C.

Taking the FR-4 printed circuit board and 1/16 thick with 1 ounce copper foil as an experiment (fig.1 & fig.2), the PCB material is effective at transmitting heat with the tab attached to the pad area and a ground plane layer on the backside of the substrate. Refer to table 1 for the results of the experiment.


The thermal interaction from other components in the application can effect the thermal resistance of the SPX1202. The actual thermal resistance can be determined with experimentation. SPX1202 power dissipation is calculated as follows:

$$P_D = (V_{IN} - V_{OUT})(I_{OUT})$$

Maximum Junction Temperature range:

$$T_J = T_{\text{ambient (max)}} + P_D * \text{thermal resistance (Junction-to-ambient)}$$

Maximum Junction temperature must not exceed the 125°C.

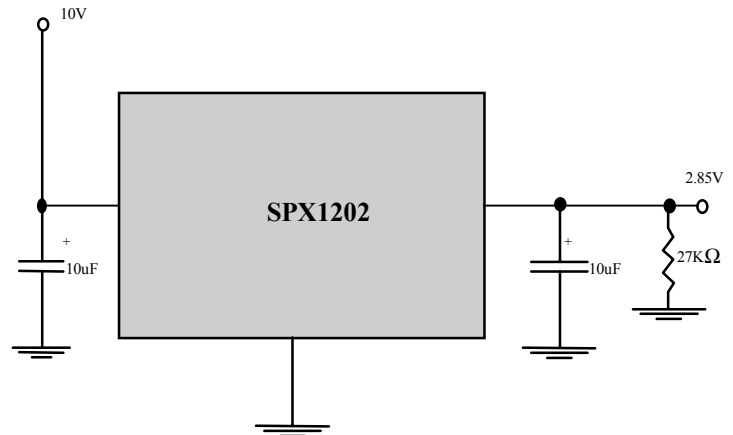

$$P_O = (10V - 2.85)(105mA) = (7.15)(105mA) = 703mW$$

Fig. 1. Circuit Layout, Thermal Experiments.


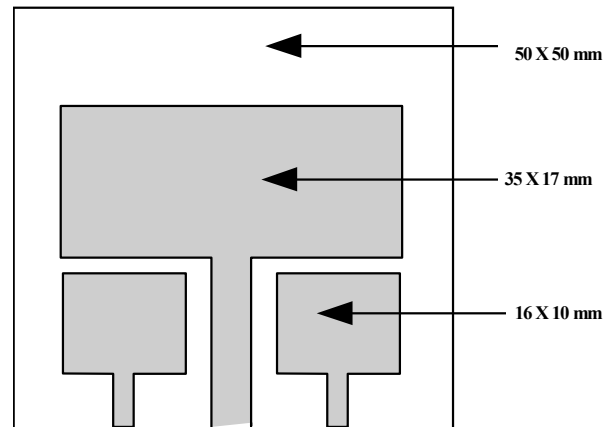



Fig. 2. Substrate Layout for SOT-223

Table 1.

TOTAL PC BOARD AREA	TOPSIDE COPPER AREA	BACKSIDE COPPER AREA	THERMAL RESISTANCE JUNCTION TO AMBIENT
2500mm	2500mm	2500mm	46°C/W°
2500mm	1250mm	2500mm	47°C/W°
2500mm	950mm	2500mm	49°C/W°
2500mm	2500mm	0	51°C/W°
2500mm	1800mm	0	53°C/W°
1600mm	600mm	1600mm	55°C/W°
2500mm	1250mm	0	58°C/W°
2500mm	915mm	0	59°C/W°
1600mm	600mm	0	67°C/W°
900mm	240mm	900mm	72°C/W°
900mm	240mm	0	85°C/W°

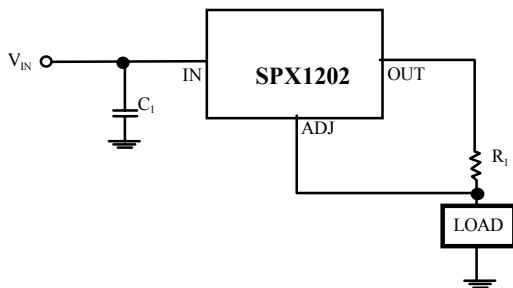

600mA Current Output

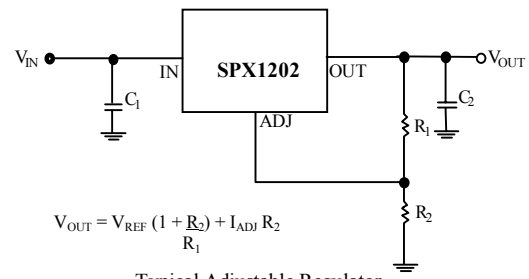

$$V_{OUT} = V_{REF} \left(1 + \frac{R_2}{R_1} \right) + I_{ADJ} R_2$$

Typical Adjustable Regulator

ORDERING INFORMATION

Ordering No.	Precision	Output Voltages	Packages
SPX1202U	1%	Adj	3 Lead TO-220
SPX1202U-1.5	1%	1.5V	3 Lead TO-220
SPX1202U-2.5	1%	2.5V	3 Lead TO-220
SPX1202U-3.0	1%	3.0V	3 Lead TO-220
SPX1202U-3.3	1%	3.3V	3 Lead TO-220
SPX1202U-5.0	1%	5.0V	3 Lead TO-220
SPX1202T	1%	Adj	3 Lead TO-263
SPX1202T-1.5	1%	1.5V	3 Lead TO-263
SPX1202T-2.5	1%	2.5V	3 Lead TO-263
SPX1202T-3.0	1%	3.0V	3 Lead TO-263
SPX1202T-3.3	1%	3.3V	3 Lead TO-263
SPX1202T-5.0	1%	5.0V	3 Lead TO-263
SPX1202M3	1%	Adj	3 Lead TO-223
SPX1202M3-1.5	1%	1.5V	3 Lead TO-223
SPX1202M3-2.5	1%	2.5V	3 Lead TO-223
SPX1202M3-3.0	1%	3.0V	3 Lead TO-223
SPX1202M3-3.3	1%	3.3V	3 Lead TO-223
SPX1202M3-5.0	1%	5.0V	3 Lead TO-223
SPX1202S	1%	Adj	3 Lead TO-220
SPX1202S-1.5	1%	1.5V	8 Lead SOIC
SPX1202S-2.5	1%	2.5V	8 Lead SOIC
SPX1202S-3.0	1%	3.0V	8 Lead SOIC
SPX1202S-3.3	1%	3.3V	8 Lead SOIC
SPX1202S-5.0	1%	5.0V	8 Lead SOIC
SPX1202R	1%	Adj	3 Lead TO-252
SPX1202R-1.5	1%	1.5V	3 Lead TO-252
SPX1202R-2.5	1%	2.5V	3 Lead TO-252
SPX1202R-3.0	1%	3.0V	3 Lead TO-252
SPX1202R-3.3	1%	3.3V	3 Lead TO-252
SPX1202R-5.0	1%	5.0V	3 Lead TO-252



SIGNAL PROCESSING EXCELLENCE

Sipex Corporation

Headquarters and Main Offices:

22 Linnell Circle
 Billerica, MA 01821
 TEL: (978) 667-8700
 FAX: (978) 670-9001
 e-mail: sales@sipex.com

233 South Hillview Drive
 Milpitas, CA 95035
 TEL: (408) 935-7600
 FAX: (408) 934-7500

Sipex Corporation reserves the right to make changes to any products described herein. Sipex does not assume any liability arising out of the application or use of any product or circuit described hereing; neither does it convey any license under its patent rights nor the rights of others.