

PRECISION 2.5 VOLT MICROPOWER VOLTAGE REFERENCE

ZR4040-2.5

ISSUE 3 - MARCH 1998

DEVICE DESCRIPTION

The ZR4040-2.5 uses a bandgap circuit design to achieve a precision micropower voltage reference of 2.5 volts. The device is available in small outline surface mount packages, ideal for applications where space saving is important, as well as packages for through hole requirements.

The ZR4040-2.5 design provides a stable voltage without an external capacitor and is stable with capacitive loads. The ZR4040-2.5 is recommended for operation between 60 μ A and 15mA and so is ideally suited to low power and battery powered applications.

Excellent performance is maintained to an absolute maximum of 25mA, however the rugged design and 20 volt processing allows the reference to withstand transient effects and currents up to 200mA. Superior switching capability allows the device to reach stable operating conditions in only a few microseconds.

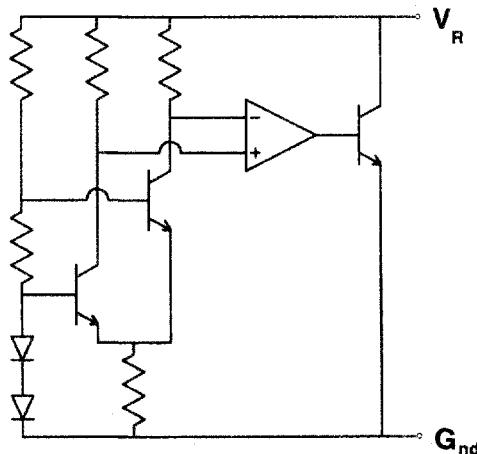
FEATURES

- Small outline SO8 and SOT23 packages
- TO92 style package
- No stabilising capacitor required
- Typical T_c 30ppm/ $^{\circ}$ C
- Typical slope resistance 0.4 Ω
- 2% 1% and 0.5 % tolerance
- Industrial temperature range
- Operating current 60 μ A to 15mA
- Transient response, stable in less than 10 μ s

APPLICATIONS

- Battery powered and portable equipment.
- Metering and measurement systems.
- Instrumentation.
- Test equipment.
- Data acquisition systems.
- Precision power supplies.

SCHEMATIC DIAGRAM



ZR4040-2.5

ABSOLUTE MAXIMUM RATING

Reverse Current 25mA
 Forward Current 25mA
 Operating Temperature -40 to 85°C
 Storage Temperature -55 to 125°C

Power Dissipation ($T_{amb}=25^{\circ}C$)

SOT23 330mW
 SO8 625mW
 E-Line, 3 pin (TO92) 500mW

ELECTRICAL CHARACTERISTICS


TEST CONDITIONS (Unless otherwise stated) $T_{amb}=25^{\circ}C$

SYMBOL	PARAMETER	CONDITIONS	LIMITS			TOL. %	UNITS
			MIN	TYP	MAX		
V_R	Reverse Breakdown Voltage	$I_R=150\mu A$	2.4875	2.5	2.5125	0.5	V
			2.475	2.5	2.525	1	
			2.45	2.5	2.55	2	
I_{min}	Minimum Operating Current			25	60		μA
I_R	Recommended Operating Current		0.06		15		mA
T_C	Average Reverse Breakdown Voltage Temp. Co.	$I_{R(min)}$ to $I_{R(max)}$		30	100		ppm/ $^{\circ}C$
R_S	Slope Resistance			0.4	2		Ω
Z_R	Reverse Dynamic Impedance	$I_R = 1mA$ $f = 100Hz$ $I_{AC}=0.1 I_R$		0.3	0.8		Ω
E_N	Wideband Noise Voltage	$I_R = 1mA$ $f = 10Hz$ to $10kHz$		45			μV (rms)







$$\text{t } T_C = \frac{(V_{R(max)} - V_{R(min)}) \times 1000000}{V_R \times (T_{max} - T_{min})}$$

Note: $V_{R(max)} - V_{R(min)}$ is the maximum deviation in reference voltage measured over the full operating temperature range.
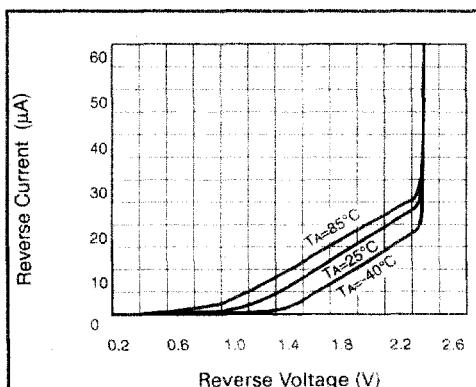
$$\text{s } R_S = \frac{V_R \text{ Change}(I_R(\text{min}) \text{ to } I_R(\text{max}))}{I_R(\text{max}) - I_R(\text{min})}$$




Reverse Characteristics

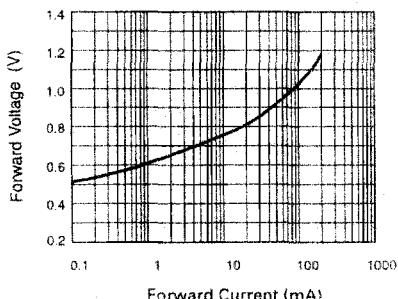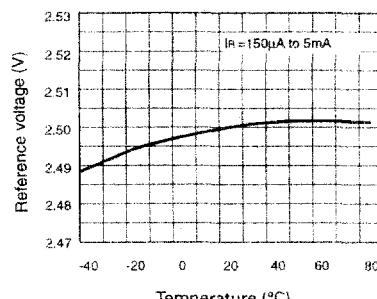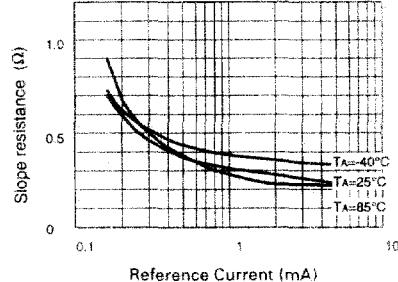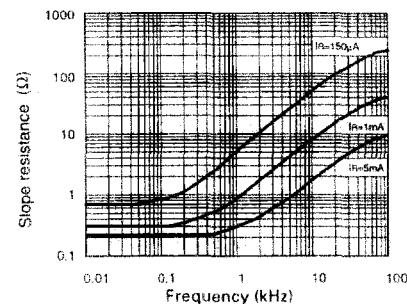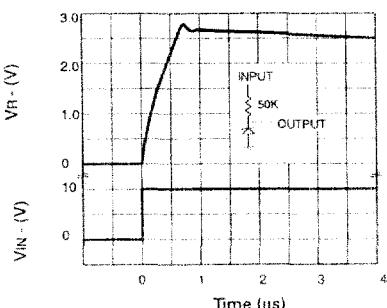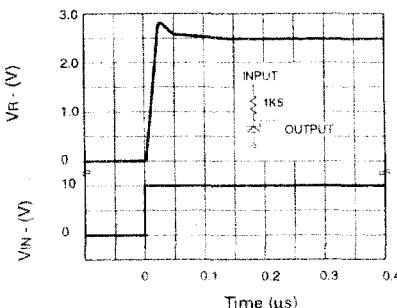TYPICAL CHARACTERISTICS**Forward Characteristics****Temperature Drift****Slope Resistance v Current****Slope Resistance v Frequency****Transient Response ($I_R=150\mu\text{A}$)****Transient Response ($I_R=5\text{mA}$)**

ZR4040-2.5


CONNECTION DIAGRAMS

SO8 Package Suffix - N8




Top View

SOT23 Package Suffix - F



Top View -
Pin 1 floating or connected to pin 2

E-Line, 3 pin, Rev Package Suffix - R



Bottom View -
Pin 3 floating or connected to pin 1

ORDERING INFORMATION

Part Number	Tol%	Package	Partmark
ZR40402F25	2	SOT23	25L
ZR40401F25	1	SOT23	25M
ZR404005F25	0.5	SOT23	25V
ZR40402N825	2	SO8	ZR4040225
ZR40401N825	1	SO8	ZR4040125
ZR404005N825	0.5	SO8	ZR4040525
ZR40402R25	2	E-Line *	ZR4040225
ZR40401R25	1	E-Line *	ZR4040125
ZR404005R25	0.5	E-Line *	ZR4040525

* E-Line, 3 pin Reversed