




# LK112S SERIES

## LOW NOISE LOW DROPPED VOLTAGE REGULATOR WITH SHUTDOWN FUNCTION

- OUTPUT CURRENT UP TO 200mA
- LOW DROPOUT VOLTAGE (500mV MAX AT  $I_{OUT}=200mA$ )
- VERY LOW QUIESCENT CURRENT: 0.1 $\mu A$  IN OFF MODE AND MAX 250 $\mu A$  IN ON MODE AT  $I_{OUT}=0mA$
- LOW OUTPUT NOISE: TYP 30 $\mu V$  AT  $I_{OUT}=60mA$  AND  $10Hz < f < 80KHz$
- WIDE RANGE OF OUTPUT VOLTAGES
- INTERNAL CURRENT AND THERMAL LIMIT
- $V_{OUT}$  TOLERANCE  $\pm 2\%$  (AT 25°C)


### DESCRIPTION

The LK112S is a low dropout linear regulator with a built in electronic switch. The internal switch can be controlled by TTL or CMOS logic levels. The device is ON state when the control pin is pulled to a logic high level. An external capacitor can be used connected to the noise bypass pin to lower the output noise level to 30 $\mu V_{rms}$ . An internal PNP pass transistor is used to achieve a low dropout voltage.

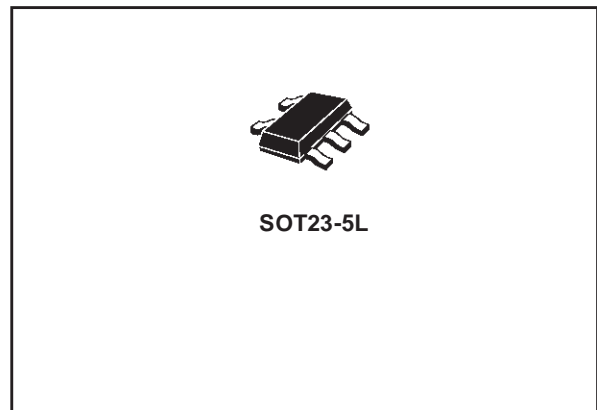

The LK112S has a very low quiescent current in ON MODE while in OFF MODE the  $I_q$  is reduced down to 100nA max. The internal thermal shutdown circuitry limits the junction temperature to below 150°C. The load current is internally monitored and the device will shutdown in the presence of a short circuit or overcurrent condition at the output.

### SCHEMATIC DIAGRAM

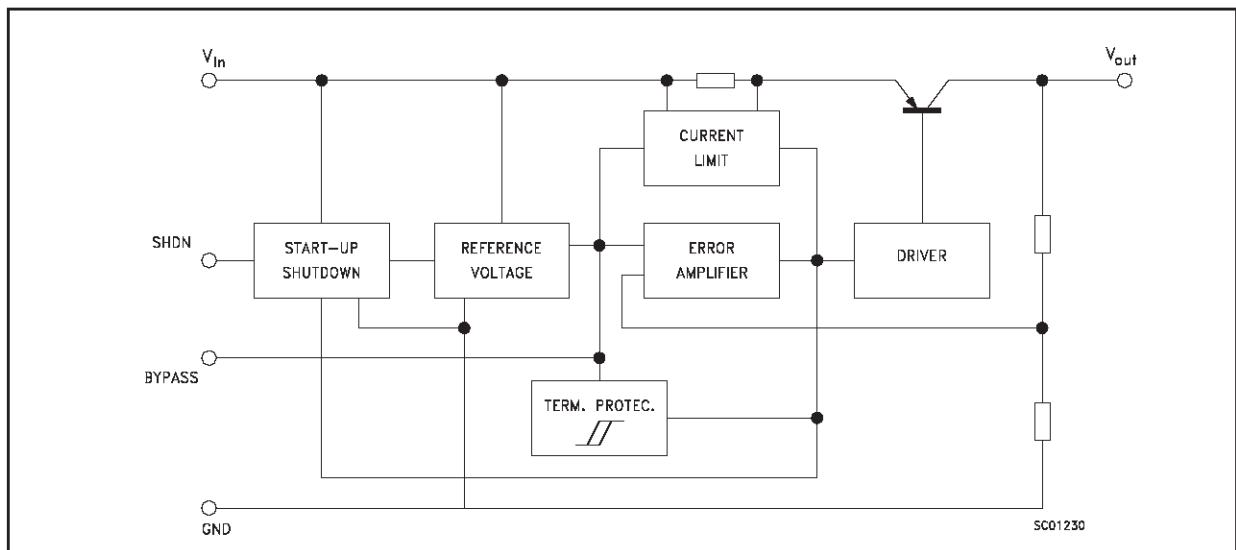


## LK112S SERIES

### ABSOLUTE MAXIMUM RATINGS

| Symbol     | Parameter                            | Value              | Unit |
|------------|--------------------------------------|--------------------|------|
| $V_I$      | DC Input Voltage                     | 16                 | V    |
| $V_{SHDN}$ | Shutdown Input Voltage               | 16                 | V    |
| $I_O$      | Output Current                       | Internally limited |      |
| $T_{stg}$  | Storage Temperature Range            | -55 to +150        | °C   |
| $T_{op}$   | Operating Junction Temperature Range | -30 to +80         | °C   |

### CONNECTION DIAGRAM (top view)

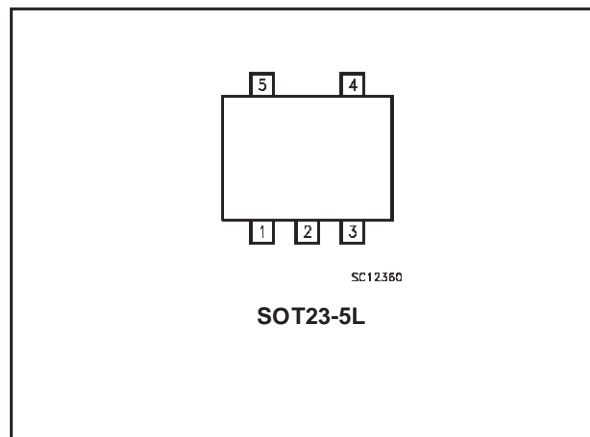

### PIN DESCRIPTION

| Pin N° | Symbol | Name and Function   |
|--------|--------|---|
| 1      | SHDN   | Shutdown Input: Disables the regulator when is connected to GND or to positive voltage less than 0.6V   |
| 2      | GND    | Ground Pin: Internally connected to the die attach flag to decrease the total thermal resistance and increase the package ability to dissipate power. |
| 3      | Bypass | Bypass Pin: Bypass with 0.1μF to improve the Vref thermal noise performances.   |
| 4      | OUT    | Output Port   |
| 5      | IN     | Input Port  |

**ELECTRICAL CHARACTERISTICS FOR LK112** ( $T_j = 25^\circ\text{C}$ ,  $V_{IN}=V_{OUT}+1\text{V}$  (see Note 1),  $I_{OUT}=0\text{mA}$ ,  $V_{SHDN}=1.8\text{V}$ ,  $C_I = 1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$ ,  $C_{BYPASS} = 0.1\ \mu\text{F}$  unless otherwise specified)

| Symbol           | Parameter                              | Test Conditions   | Min.        | Typ. | Max. | Unit   |
|------------------|--|---|-------------|------|------|--------|
| $I_d$            | Quiescent Current                      | ON MODE (except $I_{SHDN}$ )  |             | 175  | 250  | μA     |
|                  |  | OFF MODE $V_I = 8\text{V}$ $V_{SHDN} = 0\text{V}$   |             | 0    | 0.1  | μA     |
| $V_O$            | Output Voltage                         | $I_O = 30\text{mA}$   | (see table) |      |      |        |
| $\Delta V_O$     | Line Regulation                        | $V_I = V_O+1\text{V}$ to $V_O+6\text{V}$ , $V_O \leq 5.6\text{V}$   |             | 0.7  | 20   | mV     |
|                  |  | $V_I = V_O+1\text{V}$ to $V_O+6\text{V}$ , $V_O > 5.6\text{V}$  |             | 0.8  | 40   | mV     |
| $\Delta V_O$     | Load Regulation                        | $I_O = 1$ to $60\text{mA}$  |             | 15   | 30   | mV     |
|                  |  | $I_O = 1$ to $200\text{mA}$   |             | 30   | 90   | mV     |
| $V_d$            | Dropout Voltage                        | $I_O = 60\ \text{mA}$ (see Note 2)  |             | 0.17 | 0.24 | V      |
|                  |  | $I_O = 200\ \text{mA}$ (see Note 2)   |             | 0.35 | 0.5  | V      |
| $I_{SC}$         | Short Circuit Current                  |   | 200         |      |      | mA     |
| SVR              | Supply Voltage Rejection               | $V_I = V_O+1.5\text{V}$ $C_{BYP} = 0.1\ \mu\text{F}$<br>$C_O = 10\ \mu\text{F}$ $f = 400\text{Hz}$ $I_O = 30\text{mA}$                    |             | 55   |      | dB     |
| eN               | Output Noise Voltage                   | $B = 10\text{Hz}$ to $80\text{KHz}$ $C_{BYP} = 0.1\ \mu\text{F}$<br>$C_O = 10\ \mu\text{F}$ $V_I = V_O+1.5\text{V}$ , $I_O = 60\text{mA}$ |             | 30   |      | μVrms  |
| $I_{SHDN}$       | Shutdown Input Current                 | $V_{SHDN} = 1.8\text{V}$ Output ON  |             | 12   | 35   | μA     |
| $V_{SHDN}$       | Shutdown Input Logic                   | Output ON<br>Output OFF   | 1.8         |      | 0.6  | V<br>V |
| $\Delta V_O/T_j$ | Output Voltage Temperature Coefficient | $I_O = 10\text{mA}$   |             | 0.09 |      | mV/°C  |

Note 1: for version with output voltage less than 2V  $V_{IN}=2.4\text{V}$

Note 2: only for version with output voltage more than 2.1V

## ORDERING NUMBERS AND OUTPUT VOLTAGE


| Part Number     | Output Voltage | V <sub>OUT</sub> Min | V <sub>OUT</sub> Max | Test Voltage |
|-----------------|----------------|----------------------|----------------------|--------------|
| LK112SM13TR     | 1.3V           | 1.24V                | 1.36V                | 2.4V         |
| LK112SM14TR (*) | 1.4V           | 1.34V                | 1.46V                | 2.4V         |
| LK112SM15TR     | 1.5V           | 1.44V                | 1.56V                | 2.4V         |
| LK112SM16TR     | 1.6V           | 1.54V                | 1.66V                | 2.4V         |
| LK112SM17TR (*) | 1.7V           | 1.64V                | 1.76V                | 2.4V         |
| LK112SM18TR     | 1.8V           | 1.74V                | 1.86V                | 2.4V         |
| LK112SM19TR (*) | 1.9V           | 1.84V                | 1.96V                | 2.4V         |
| LK112SM20TR (*) | 2.0V           | 1.94V                | 2.06V                | 3.0V         |
| LK112SM21TR     | 2.1V           | 2.04V                | 2.16V                | 3.1V         |
| LK112SM22TR (*) | 2.2V           | 2.14V                | 2.26V                | 3.2V         |
| LK112SM23TR (*) | 2.3V           | 2.24V                | 2.36V                | 3.3V         |
| LK112SM24TR (*) | 2.4V           | 2.34V                | 2.46V                | 3.4V         |
| LK112SM25TR     | 2.5V           | 2.44V                | 2.56V                | 3.5V         |
| LK112SM26TR (*) | 2.6V           | 2.54V                | 2.66V                | 3.6V         |
| LK112SM27TR (*) | 2.7V           | 2.64V                | 2.76V                | 3.7V         |
| LK112SM28TR     | 2.8V           | 2.74V                | 2.86V                | 3.8V         |
| LK112SM29TR (*) | 2.9V           | 2.84V                | 2.96V                | 3.9V         |
| LK112SM30TR     | 3.0V           | 2.94V                | 3.06V                | 4.0V         |
| LK112SM31TR (*) | 3.1V           | 3.04V                | 3.16V                | 4.1V         |
| LK112SM32TR     | 3.2V           | 3.14V                | 3.26V                | 4.2V         |
| LK112SM33TR     | 3.3V           | 3.24V                | 3.36V                | 4.3V         |
| LK112SM34TR (*) | 3.4V           | 3.335V               | 3.465V               | 4.4V         |
| LK112SM35TR (*) | 3.5V           | 3.435V               | 3.565V               | 4.5V         |
| LK112SM36TR     | 3.6V           | 3.535V               | 3.655V               | 4.6V         |
| LK112SM37TR (*) | 3.7V           | 3.630V               | 3.770V               | 4.7V         |
| LK112SM38TR     | 3.8V           | 3.725V               | 3.875V               | 4.8V         |
| LK112SM39TR (*) | 3.9V           | 3.825V               | 3.975V               | 4.9V         |
| LK112SM40TR     | 4.0V           | 3.920V               | 4.080V               | 5.0V         |
| LK112SM41TR (*) | 4.1V           | 4.020V               | 4.180V               | 5.1V         |
| LK112SM42TR (*) | 4.2V           | 4.120V               | 4.280V               | 5.2V         |
| LK112SM43TR (*) | 4.3V           | 4.215V               | 4.385V               | 5.3V         |
| LK112SM44TR (*) | 4.4V           | 4.315V               | 4.485V               | 5.4V         |
| LK112SM45TR (*) | 4.5V           | 4.410V               | 4.590V               | 5.5V         |
| LK112SM46TR (*) | 4.6V           | 4.510V               | 4.690V               | 5.6V         |
| LK112SM47TR     | 4.7V           | 4.605V               | 4.795V               | 5.7V         |
| LK112SM48TR (*) | 4.8V           | 4.705V               | 4.895V               | 5.8V         |
| LK112SM49TR (*) | 4.9V           | 4.800V               | 5.000V               | 5.9V         |
| LK112SM50TR     | 5.0V           | 4.900V               | 5.100V               | 6.0V         |
| LK112SM55TR (*) | 5.5V           | 5.390V               | 5.610V               | 6.5V         |
| LK112SM80TR     | 8.0V           | 7.840V               | 8.160V               | 9.0V         |

(\*) Available on request


# LK112S SERIES

**TYPICAL CHARACTERISTICS** (unless otherwise specified  $T_j = 25^\circ\text{C}$ ,  $C_I = 1\mu\text{F}$ ,  $C_O = 2.2\mu\text{F}$ ,  $C_{BYP} = 100\text{nF}$ )


**Figure 1 : Output Voltage vs Temperature**

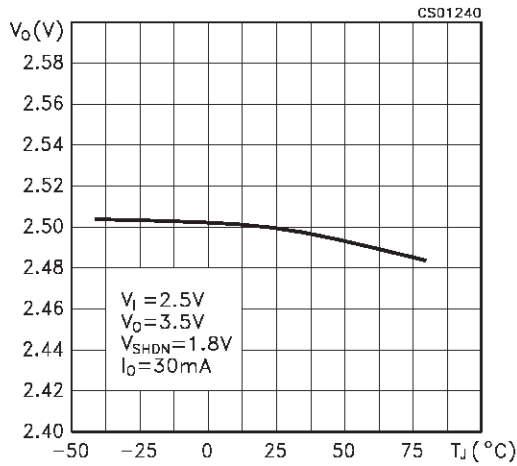


**Figure 2 : Output Voltage vs Temperature**

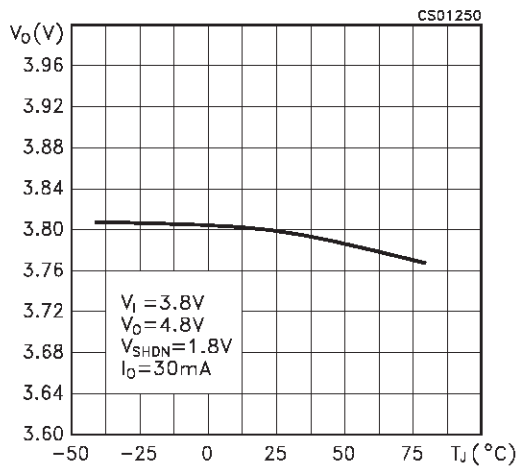


**Figure 3 : Line Regulation vs Temperature**

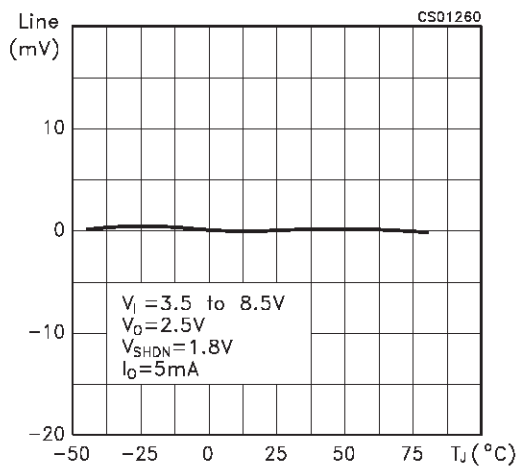

**Figure 4 : Load Regulation vs Temperature**

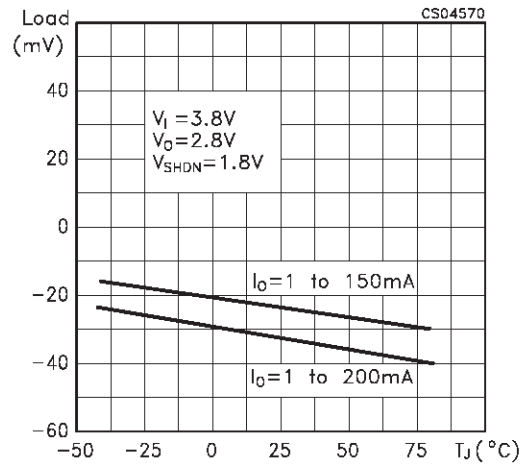

**Figure 5 : Dropout Voltage vs Temperature**

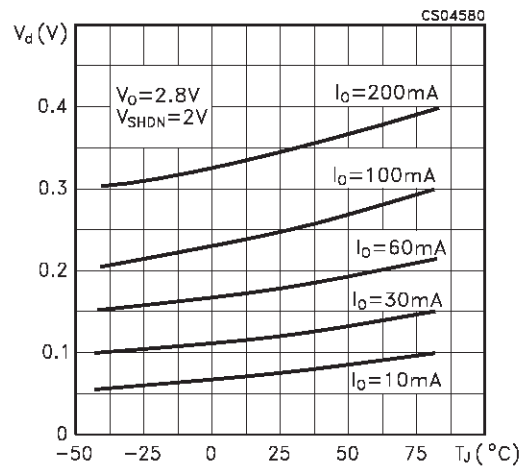

**Figure 6 : Short Circuit Current vs Dropout Voltage**

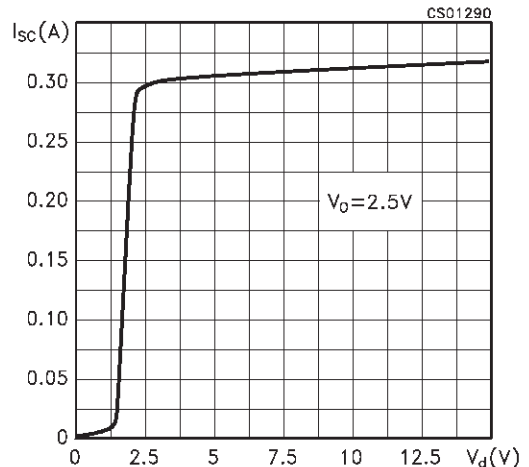


Figure 7 : Output Voltage vs Input Voltage

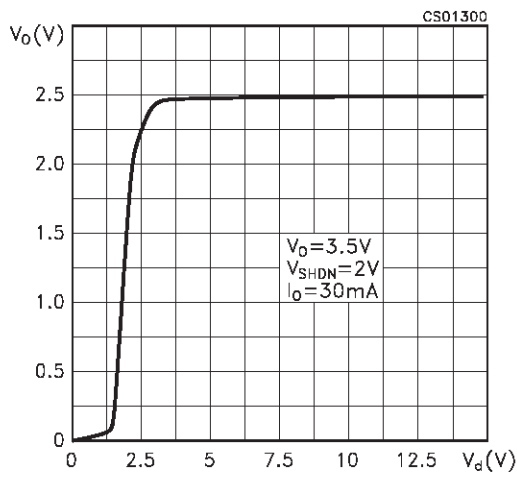


Figure 10 : Supply Voltage Rejection vs Temperature

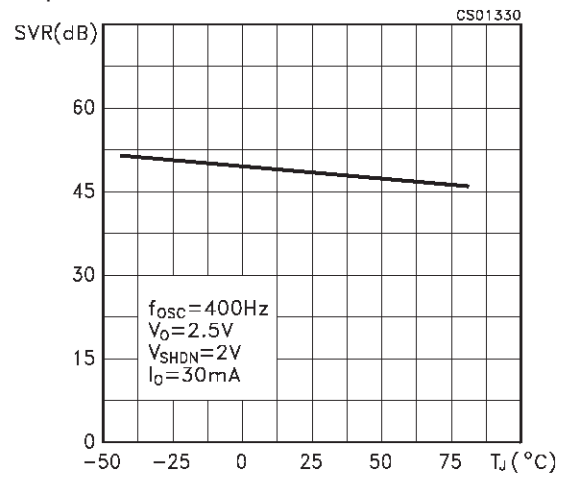


Figure 8 : Shutdown Voltage vs Temperature

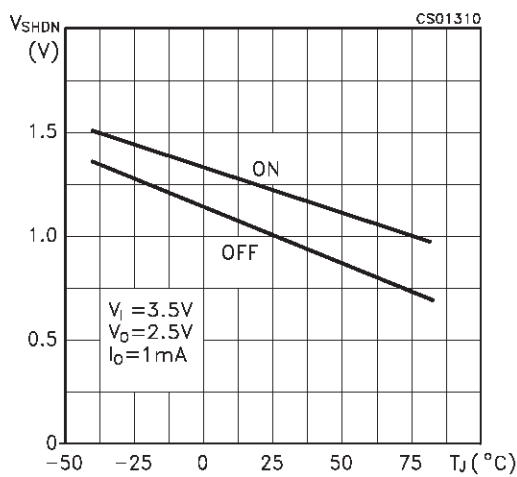


Figure 11 : Supply Voltage Rejection vs Output Current

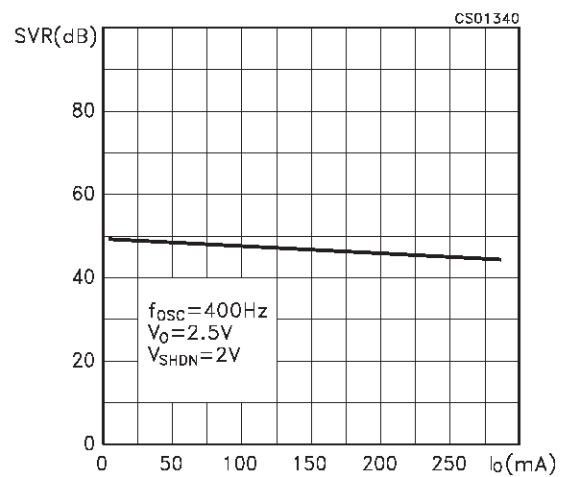


Figure 9 : Shutdown Current vs Shutdown Voltage



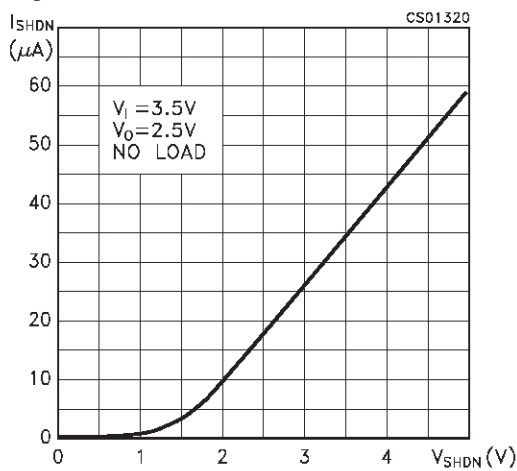



Figure 12 : Supply Voltage Rejection vs Frequency

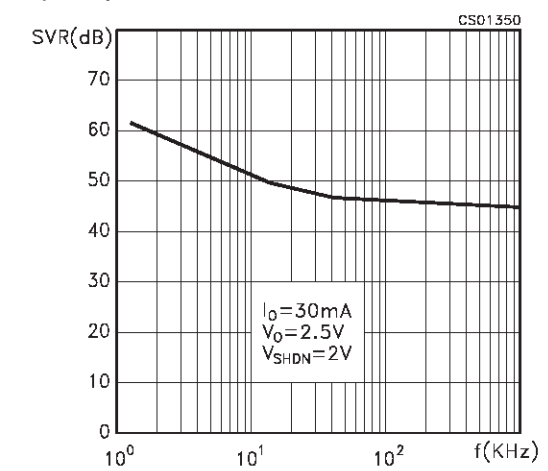


**Figure 13 : Supply Voltage Rejection vs Temperature**

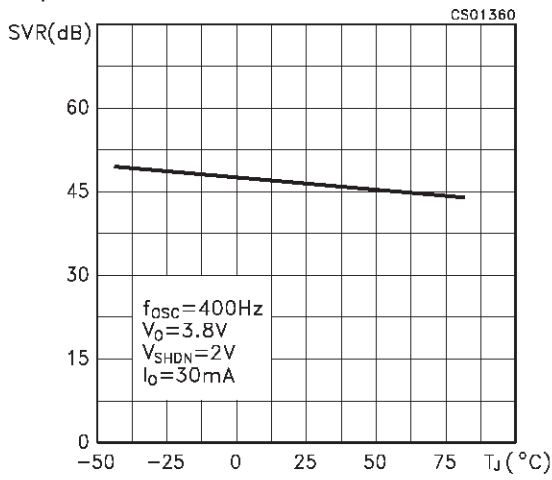


**Figure 14 : Quiescent Current vs Temperature**

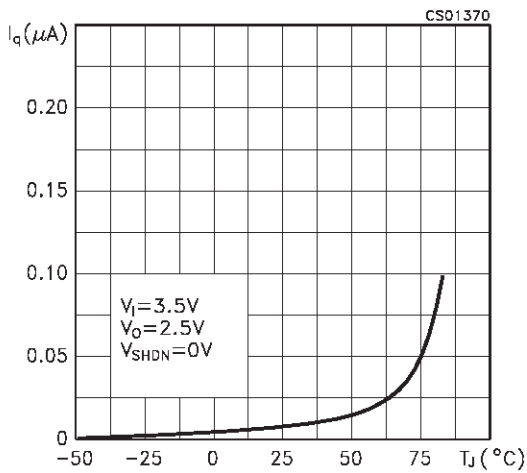


**Figure 15 : Quiescent Current vs Input Voltage**

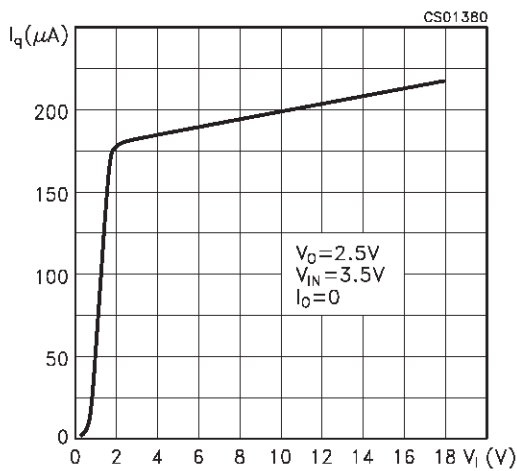

**Figure 16 : Quiescent Current vs Shutdown Voltage**

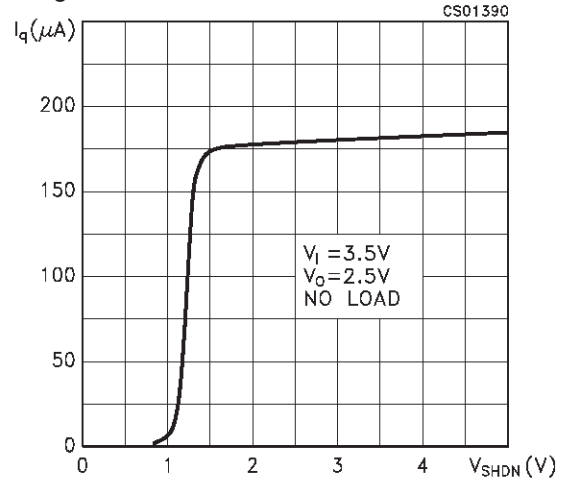

**Figure 17 : Quiescent Current vs Output Current**

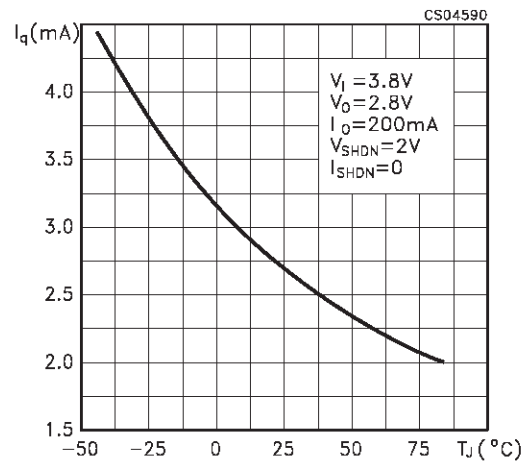

**Figure 18 : Reverse Current vs Reverse Voltage**

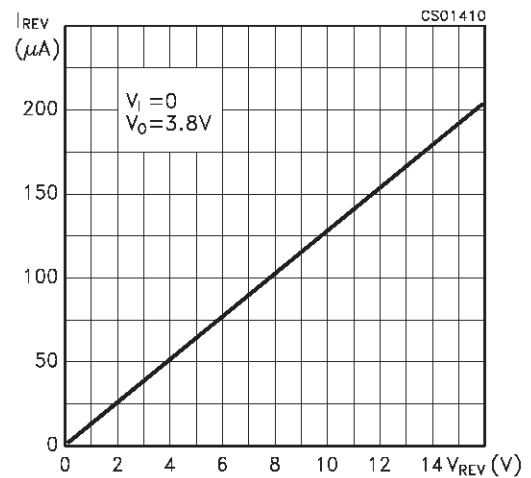


Figure 19 : Stability

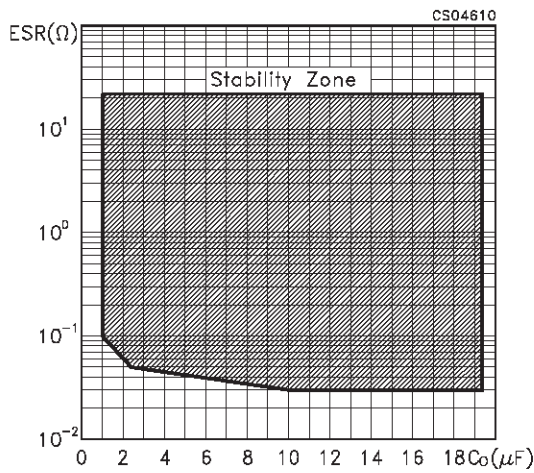


Figure 22 : Start-up Transient

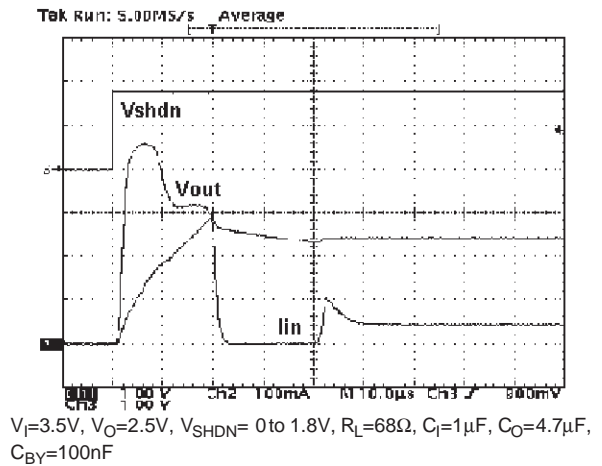


Figure 20 : Spectrum Noise

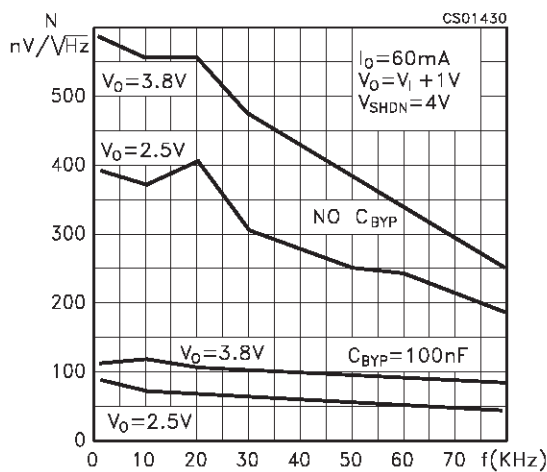


Figure 23 : Line Transient

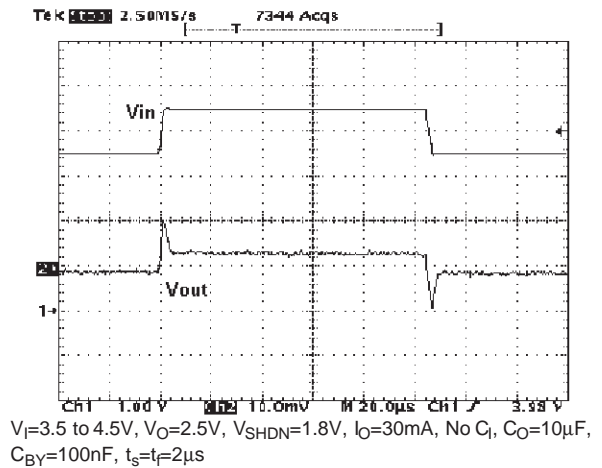


Figure 21 : Start-up Transient

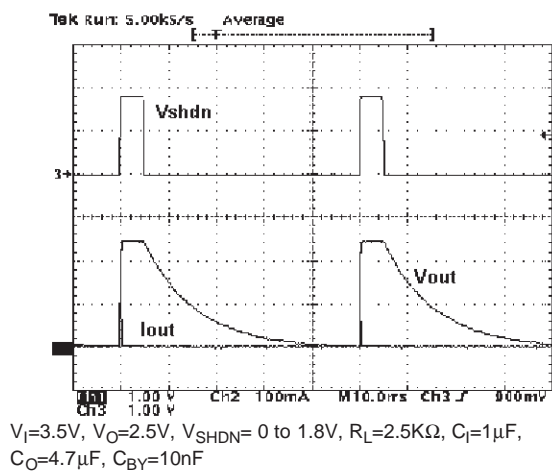


Figure 24 : Line Transient



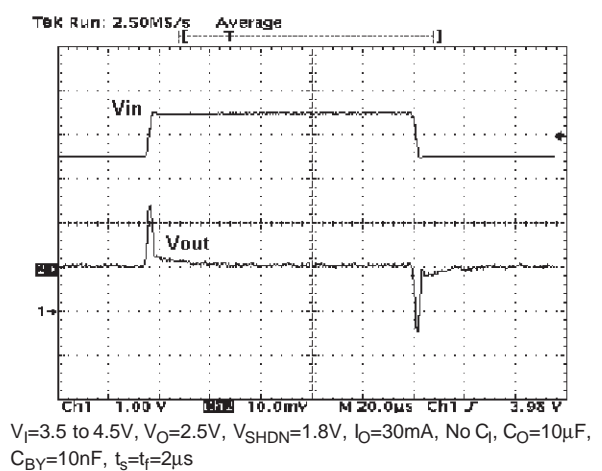


Figure 25 : Line Transient

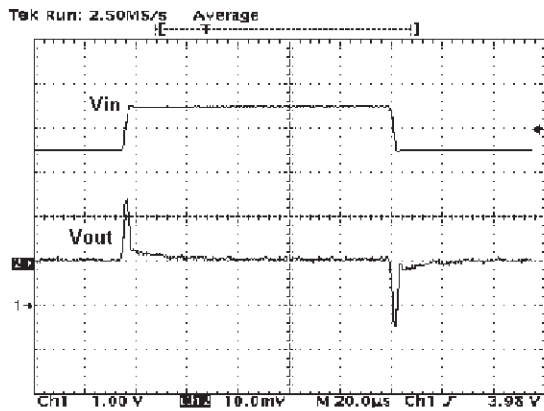


$V_I=3.5$  to  $4.5V$ ,  $V_O=2.5V$ ,  $V_{SHDN}=1.8V$ ,  $I_O=30mA$ , No  $C_I$ ,  $C_O=1\mu F$ ,  $C_{BY}=1nF$ ,  $t_s=t_f=2\mu s$

Figure 27 : Load Transient

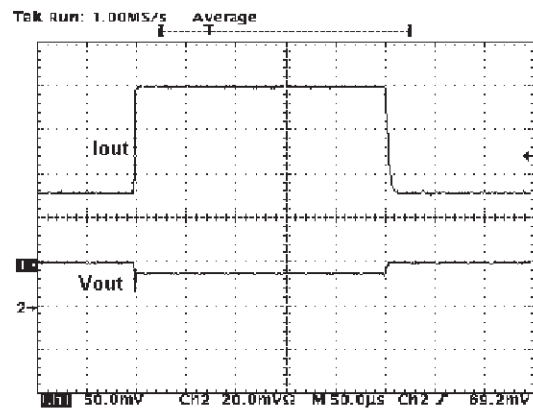


$V_I=3.5V$ ,  $V_O=2.5V$ ,  $V_{SHDN}=1.8V$ ,  $I_O=50$  to  $100mA$ ,  $C_I=1\mu F$ ,  $C_O=10\mu F$ ,  $C_{BY}=100nF$ ,  $t_s=t_f=250ns$

Figure 26 : Load Transient

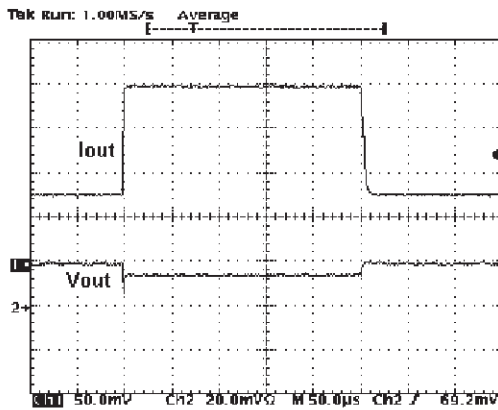

$V_I=3.5V$ ,  $V_O=2.5V$ ,  $V_{SHDN}=1.8V$ ,  $I_O=50$  to  $100mA$ ,  $C_I=1\mu F$ ,  $C_O=2.2\mu F$ ,  $C_{BY}=10nF$ ,  $t_s=t_f=250ns$

Figure 28 : Load Transient

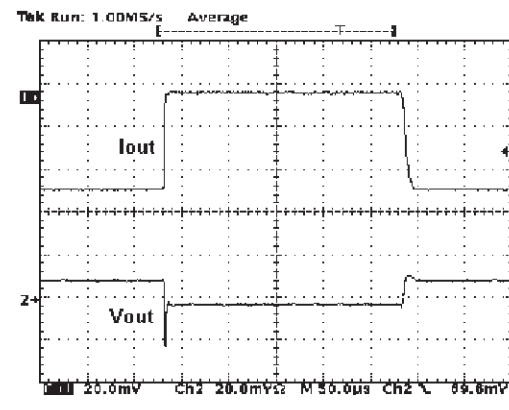


$V_I=4.8V$ ,  $V_O=3.8V$ ,  $V_{SHDN}=1.8V$ ,  $I_O=50$  to  $100mA$ ,  $C_I=1\mu F$ ,  $C_O=2.2\mu F$ ,  $C_{BY}=10nF$ ,  $t_s=t_f=250ns$




## SOT23-5L MECHANICAL DATA

| DIM. | mm.  |      |      | mils  |      |       |
|------|------|------|------|-------|------|-------|
|      | MIN. | TYP. | MAX. | MIN.  | TYP. | MAX.  |
| A    | 0.90 |      | 1.45 | 35.4  |      | 57.1  |
| A1   | 0.00 |      | 0.15 | 0.0   |      | 5.9   |
| A2   | 0.90 |      | 1.30 | 35.4  |      | 51.2  |
| b    | 0.35 |      | 0.50 | 13.7  |      | 19.7  |
| C    | 0.09 |      | 0.20 | 3.5   |      | 7.8   |
| D    | 2.80 |      | 3.00 | 110.2 |      | 118.1 |
| E    | 2.60 |      | 3.00 | 102.3 |      | 118.1 |
| E1   | 1.50 |      | 1.75 | 59.0  |      | 68.8  |
| e    |      | 0.95 |      |       | 37.4 |       |
| e1   |      | 1.9  |      |       | 74.8 |       |
| L    | 0.35 |      | 0.55 | 13.7  |      | 21.6  |

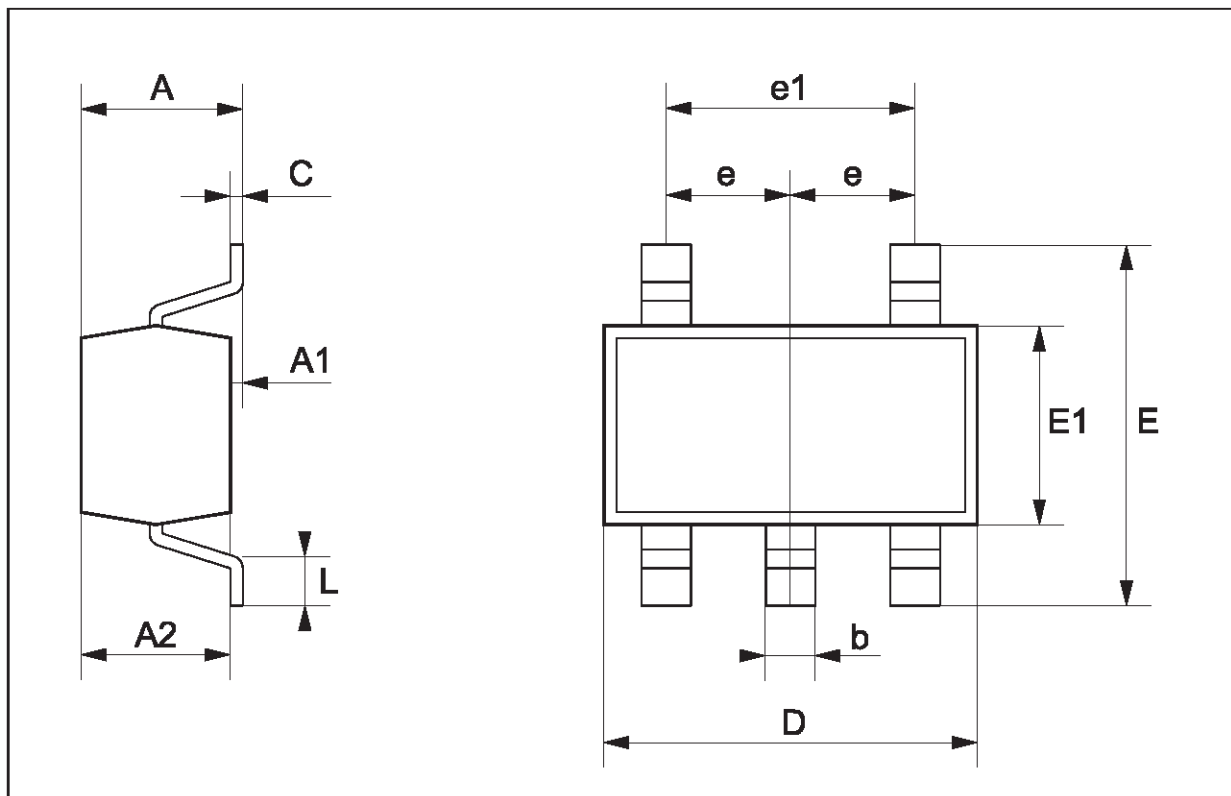

**Tape & Reel SOT23-xL MECHANICAL DATA**

| DIM. | mm.  |      |      | inch  |       |       |
|------|------|------|------|-------|-------|-------|
|      | MIN. | TYP  | MAX. | MIN.  | TYP.  | MAX.  |
| A    |      |      | 180  |       |       | 7.086 |
| C    | 12.8 | 13.0 | 13.2 | 0.504 | 0.512 | 0.519 |
| D    | 20.2 |      |      | 0.795 |       |       |
| N    | 60   |      |      | 2.362 |       |       |
| T    |      |      | 14.4 |       |       | 0.567 |
| Ao   | 3.13 | 3.23 | 3.33 | 0.123 | 0.127 | 0.131 |
| Bo   | 3.07 | 3.17 | 3.27 | 0.120 | 0.124 | 0.128 |
| Ko   | 1.27 | 1.37 | 1.47 | 0.050 | 0.054 | 0.058 |
| Po   | 3.9  | 4.0  | 4.1  | 0.153 | 0.157 | 0.161 |
| P    | 3.9  | 4.0  | 4.1  | 0.153 | 0.157 | 0.161 |

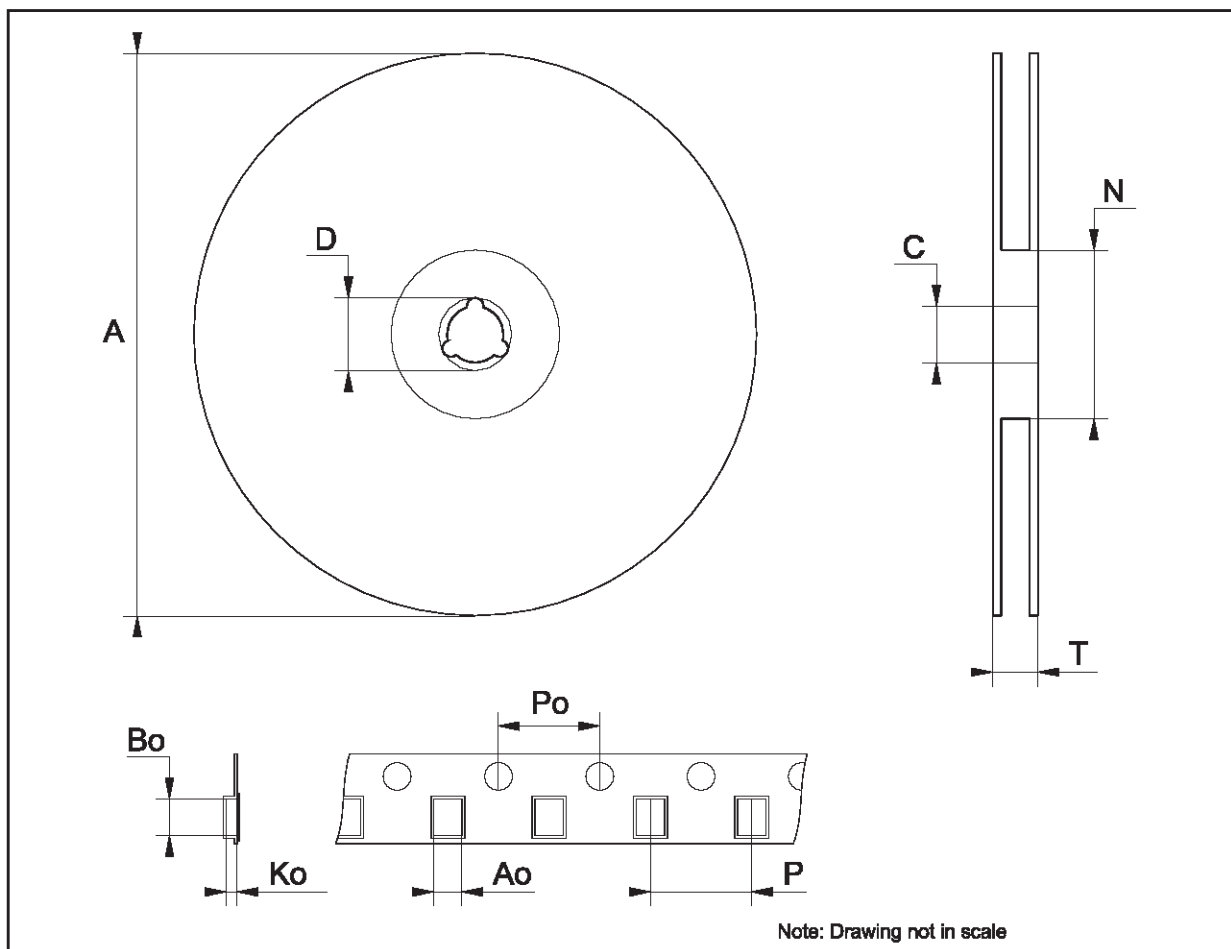

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

© The ST logo is a registered trademark of STMicroelectronics

© 2001 STMicroelectronics - Printed in Italy - All Rights Reserved  
STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia - Malta - Morocco  
Singapore - Spain - Sweden - Switzerland - United Kingdom

© <http://www.st.com>

