


Silicon Power Rectifier SDM150



Dim.	Inches		Millimeters		Notes
	Min.	Max.	Min.	Max.	
A	---	2.300	---	58.42	
B	0.700	0.800	17.78	20.32	
C	---	0.625	---	15.87	
D	1.775	BSC	45.08	BSC	
F	0.280	0.310	6.86	7.11	Dia.
G	1/4-20 UNC				
H	0.600	---	15.24	---	
K	0.490	0.510	---	---	
L	---	0.050	---	1.27	
M	0.120	0.130	3.05	3.30	

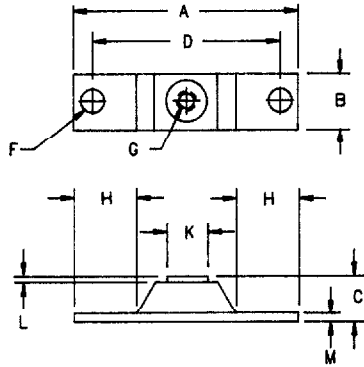

Microsemi Catalog Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage
SDM15002*	200V	200V
SDM15004*	400V	400V
SDM15006*	600V	600V
SDM15008*	800V	800V
SDM15010*	1000V	1000V
SDM15012*	1200V	1200V

*Add Suffix A for Common Anode

- Compact Package
- Glass Passivated Die
- 150A
- Non-Isolated Baseplate
- Low Profile

Electrical Characteristics		
Average forward current	I _{F(AV)} 150 Amps	T _C = 120°C half sine, R _{θJC} = 0.3°C/W
Maximum surge current	I _{FSM} 2500 Amps	8.3 ms, half sine, T _J = 175°C
Max I ² t for fusing	I ² t 26000 A ² s	
Max peak forward voltage	V _{FM} 1.1 Volts	I _{FM} = 200A: T _J = 25°C*
Max peak forward voltage	V _{FM} 1.0 Volts	I _{FM} = 200A: T _J = 175°C*
Max peak reverse current	I _{RM} 5 mA	V _R = 150V, T _J = 150°C
Max peak reverse current	I _{RM} 200 μA	V _R = 25V, T _J = 25°C
Typical reverse current	I _{RM} 3.0 μA	V _R = 25V, T _J = 25°C

*Pulse test: Pulse width 300 μsec, Duty cycle 2%

Thermal and Mechanical Characteristics		
Storage temp range	T _{STC}	-40°C to 175°C
Operating junction temp range	T _J	-40°C to 175°C
Max thermal resistance	R _{θJC}	0.3°C/W Junction to case
Typical thermal resistance	R _{θCS}	0.08°C/W Case to sink
Terminal Torque		50 inch pounds maximum
Mounting Base Torque		40 inch pounds minimum
Typical Weight		1.48 ounces (42 grams) typical

Microsemi Corp.
Colorado

PH: 303-469-2161
FAX: 303-466-3775

E-53

SDM150

Figure 1
Typical Forward Characteristics

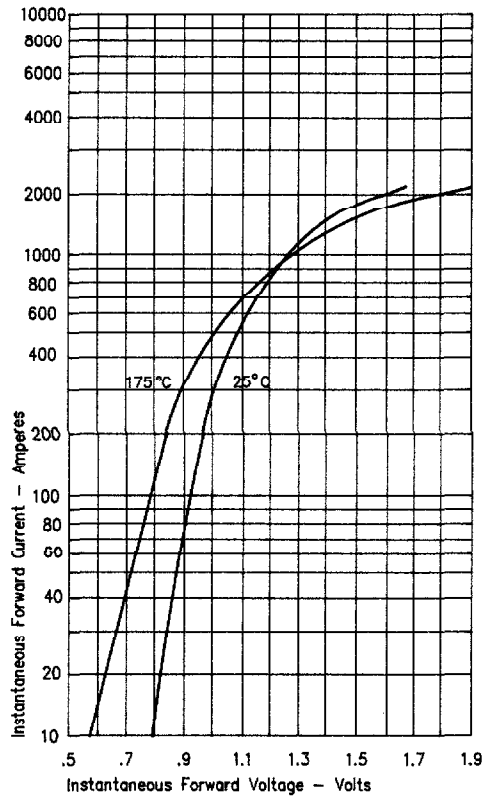


Figure 3
Forward Current Derating

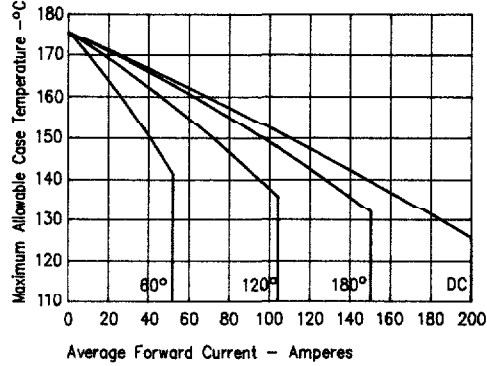


Figure 4
Maximum Forward Power Dissipation

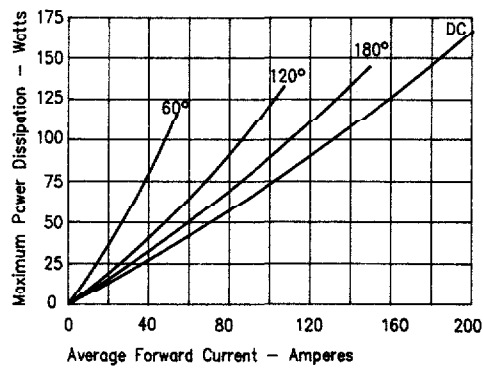


Figure 2
Typical Reverse Characteristics



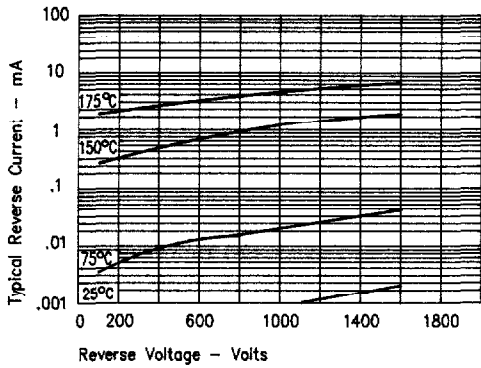


Figure 5
Transient Thermal Impedance

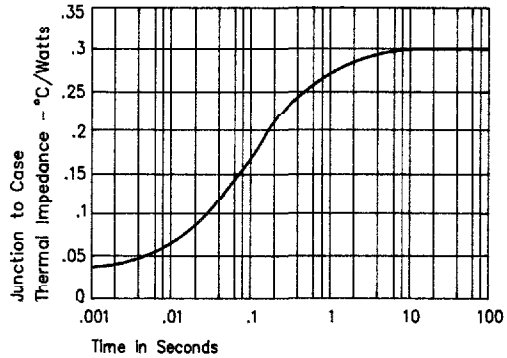

SDM150

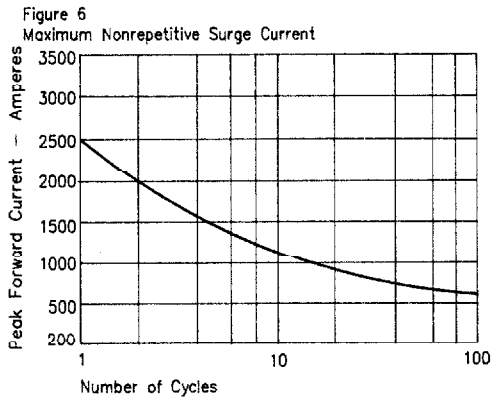

E