



# TSC2412

## General Purpose NPN Transistor

<b>SOT-23</b>  Pin assignment: 1. Base 2. Emitter 3. Collector	<b>BV<sub>CBO</sub> = 50V</b> <b>I<sub>C</sub> = 150mA</b> <b>V<sub>CE (SAT)</sub> = 0.2V(typ.) @I<sub>C</sub> / I<sub>B</sub> = 50mA / 5mA</b>								
<b>Features</b> <ul style="list-style-type: none"> <li>◊ Driver stage of AF amplifier.</li> <li>◊ General purpose switching application</li> </ul>	<b>Ordering Information</b> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="text-align: center;">Part No.</th> <th style="text-align: center;">Packing</th> <th style="text-align: center;">Package</th> <th style="text-align: center;">Marking</th> </tr> <tr> <td style="text-align: center;">TSC2412CX</td> <td style="text-align: center;">3kpcs / Reel</td> <td style="text-align: center;">SOT-23</td> <td style="text-align: center;">C4</td> </tr> </table>	Part No.	Packing	Package	Marking	TSC2412CX	3kpcs / Reel	SOT-23	C4
Part No.	Packing	Package	Marking						
TSC2412CX	3kpcs / Reel	SOT-23	C4						
<b>Structure</b> <ul style="list-style-type: none"> <li>◊ Epitaxial planar type.</li> <li>◊ Complementary to TSA1037CX</li> </ul>									

### Absolute Maximum Rating (Ta = 25 °C unless otherwise noted)

Parameter	Symbol	Limit	Unit
Collector-Base Voltage	V <sub>CBO</sub>	60V	V
Collector-Emitter Voltage	V <sub>CEO</sub>	50V	V
Emitter-Base Voltage	V <sub>EBO</sub>	7	V
Collector Current	I <sub>C</sub>	150	mA
Collector Power Dissipation	P <sub>D</sub>	225	mW
Operating Junction Temperature	T <sub>J</sub>	+150	°C
Operating Junction and Storage Temperature Range	T <sub>STG</sub>	- 55 to +150	°C

Note: 1. Single pulse, P<sub>w</sub> = 380uS, Duty <= 2%

<b>Electrical Characteristics</b>						
Ta = 25 °C unless otherwise noted						
Parameter	Conditions	Symbol	Min	Typ	Max	Unit
<b>Static</b>						
Collector-Base Voltage	I <sub>C</sub> = 100uA, I <sub>E</sub> = 0	BV <sub>CBO</sub>	60	--	--	V
Collector-Emitter Breakdown Voltage	I <sub>C</sub> = 1mA, I <sub>B</sub> = 0	BV <sub>CEO</sub>	50	--	--	V
Emitter-Base Breakdown Voltage	I <sub>E</sub> = 50uA, I <sub>C</sub> = 0	BV <sub>EBO</sub>	7	--	--	V
Collector Cutoff Current	V <sub>CB</sub> = 60V, I <sub>E</sub> = 0	I <sub>CBO</sub>	--	--	0.1	uA
Emitter Cutoff Current	V <sub>EB</sub> = 7V, I <sub>C</sub> = 0	I <sub>EBO</sub>	--	--	0.1	uA
Collector-Emitter Saturation Voltage	I <sub>C</sub> / I <sub>B</sub> = 50mA / 5mA	V <sub>CE(SAT)1</sub>	--	0.2	0.4	V
DC Current Transfer Ratio	V <sub>CE</sub> = 6V, I <sub>C</sub> = 1mA	h <sub>FE</sub>	180	--	820	
Transition Frequency	V <sub>CE</sub> = 12V, I <sub>C</sub> = 2mA, f = 100MHz	f <sub>T</sub>	80	180	--	MHz
Output Capacitance	V <sub>CB</sub> = 5V, f = 1MHz	C <sub>ob</sub>	--	2	3.5	pF


Note : pulse test: pulse width <=380uS, duty cycle <=2%

<b>Classification Of h<sub>FE</sub></b>			
Rank	R	S*	T
Range	180 - 390	270 - 560	410 - 820


Note: \* is Typical

## Electrical Characteristics Curve


**Figure 1. Current Gain vs Collector Current**

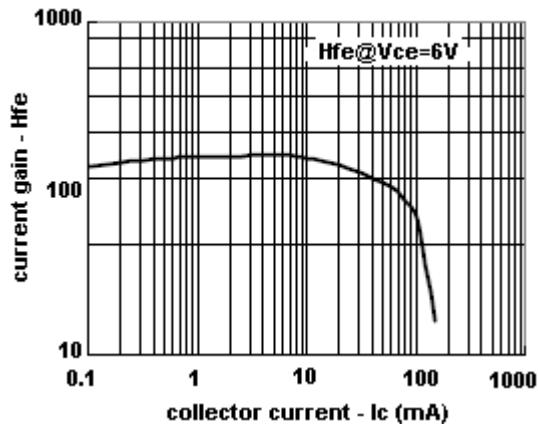


**Figure 2. Saturation Voltage vs Collector Current**

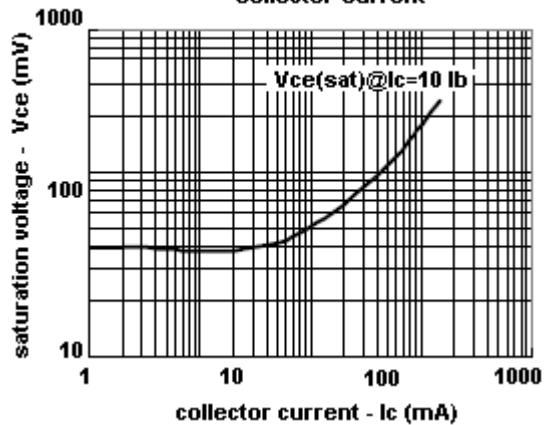


**Figure 3. Saturation Voltage vs Collector Current**

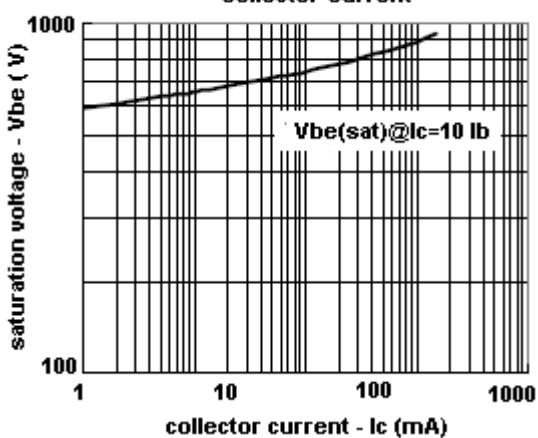


**Figure 4. Power Derating Curves**

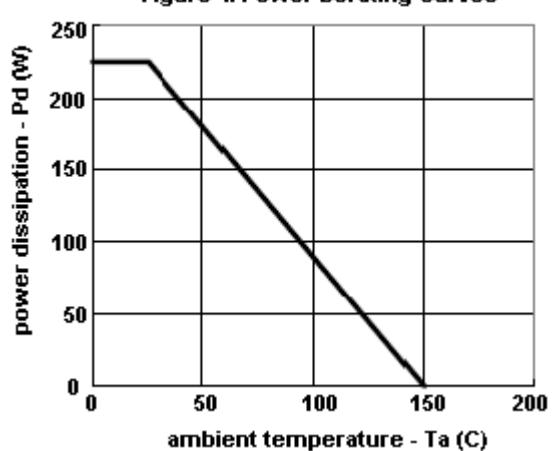

**Figure 5. Cutoff Frequency vs Collector Current**

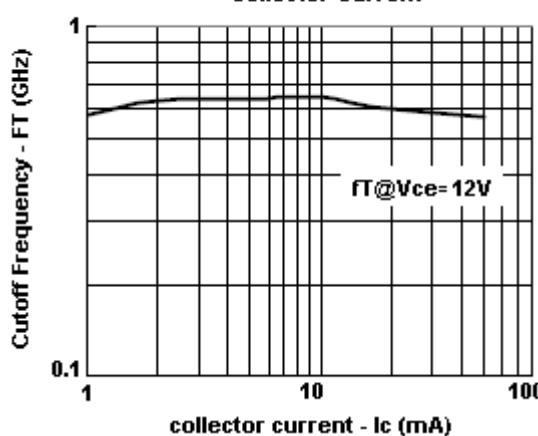

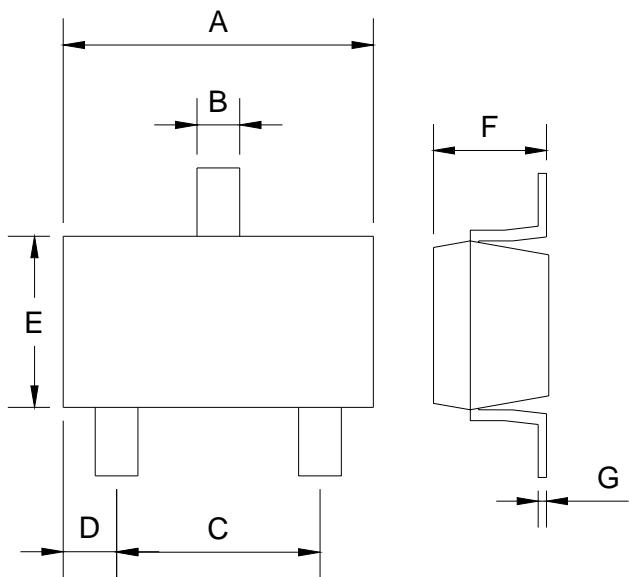SOT-23 Mechanical Drawing

SOT-23 DIMENSION				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	2.80	3.04	0.110	0.120
B	0.30	0.50	0.012	0.020
C	1.70	2.30	0.067	0.091
D	0.25	0.65	0.010	0.026
E	1.2	1.60	0.047	0.063
F	0.89	1.30	0.035	0.051
G	0.08	0.17	0.003	0.006