

**SANYO**

No.2635

**LB9051****Switching Type Hall IC**

The LB9051 is a Hall IC that is operated in the presence of an alternating magnetic field and produces a digital output. The LB9051 contains a silicon Hall generator, an amplifier, a Schmitt trigger circuit on chip and especially suited for detection of magnetism (ex. detection of the rotation of a small magnet-used substance).

**Applications**

- . Detection of magnetism
- . Contactless switch
- . Detection of the rotation, position of a magnetic substance

**Features**


- . Operated in the presence of an alternating magnetic field
- . Wide operating voltage range (3.6 to 16V)
- . Output capable of direct driving a TTL, MOS IC
- . High sensitivity (sensitive to low magnetism)

**Absolute Maximum Ratings at Ta=25°C**


			unit
Maximum Supply Voltage	$V_{CCmax}$	18	V
Maximum Supply Current	$I_{CCmax}$	8	mA
Maximum Output Current	$I_{omax}$	20	mA
Allowable Power Dissipation	$P_{dmax}$	$T_a=80^\circ C$	100 mW
Operating Temperature	$T_{opr}$	-40 to +85	°C
Storage Temperature	$T_{stg}$	-55 to +125	°C

**Electrical Characteristics at Ta=25°C**


		min	typ	max	unit
Release Point	$B_{LH}$ $V_{CC}=12V, V_o:L \rightarrow H$	-300			Gauss
Operate Point	$B_{HL}$ $V_{CC}=12V, V_o:H \rightarrow L$			300	Gauss
Output 'L'-Level Voltage	$V_{OL1}$ $V_{CC}=16V, I_o=12mA, B=300Gauss$			0.4	V
	$V_{OL2}$ $V_{CC}=3.6V, I_o=12mA, B=300Gauss$			0.4	V
Output 'H'-Level Voltage	$V_{OH1}$ $V_{CC}=16V, I_o=-30\mu A, B=-300Gauss$	14.6			V
	$V_{OH2}$ $V_{CC}=3.6V, I_o=-30\mu A, B=-300Gauss$	2.2			V
Output Short Current	$-I_{OS}$ $V_{CC}=16V, V_o=0V, B=-300Gauss$	0.4		0.9	mA
Supply Current	$I_{CC1}$ $V_{CC}=16V$			6	mA
	$I_{CC2}$ $V_{CC}=3.6V$			5.5	mA

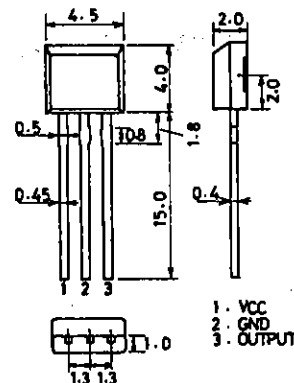**Package Dimensions**  
 (unit: mm)  
 3105


**Pin Assignment and Block Diagram**

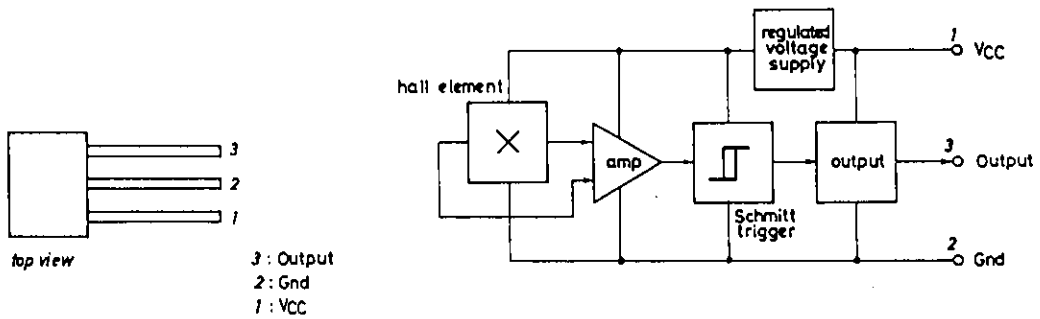


**Location of the Hall Generator and Cross-sectional View of the Hall IC**

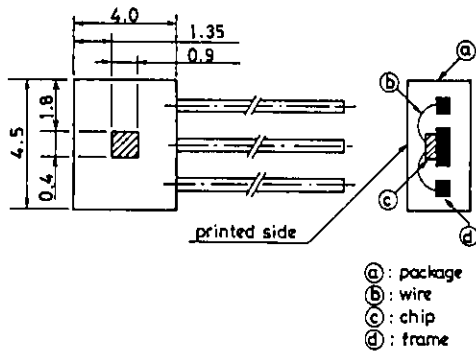

The Hall generator is located in the dashed area.

**Magnetic Flux to Electric Voltage Transduce Characteristic**

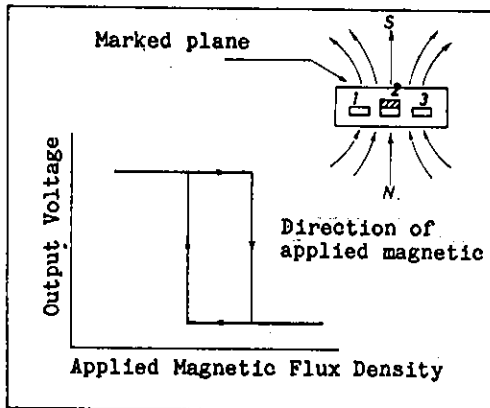

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
  - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use;
  - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.