

# plerow<sup>™</sup> ALN0332 Internally Matched LNA Module

## **Features**

- · S<sub>21</sub> = 31.1 dB@329 MHz
  - = 30.9 dB@335 MHz
- NF of 0.8 dB over Frequency
- · Unconditionally Stable
- · Single 5 V Supply
- High OIP3@Low Current

### Description

The plerow<sup>™</sup> ALN-series is the compactly designed surface-mount module for the use of the LNA with or without the following gain blocks in the infrastructure equipment of the mobile wireless (CDMA, GSM, PCS, PHS, WCDMA, DMB, WLAN, WiBro, WiMAX), GPS, satellite communication terminals, CATV and so on. It has an exceptional performance of low noise figure, high gain, high OIP3, and low bias current. The stability factor is always kept more than unity over the application band in order to ensure its unconditionally stable implementation to the application system environment. The surface-mount module package including the completed matching circuit and other components necessary just in case allows very simple and convenient implementation onto the system board in mass production level.






# **Specifications (in Production)**

Typ.@T = 25 °C, V<sub>s</sub> = 5 V, Freq. = 332 MHz, Z<sub>o.sys</sub> = 50 ohms

,			
Linit	Specifications		
Unit	Min	Тур	Max
MHz	329		335
dB	30	31	
dB		±0.1	±0.2
dB		0.8	0.9
dBm	36	37	
dB			-15/-15
dBm	20	21	
μsec		-	
mA		180	200
V	5		
Ω	50		
dBm	C.W 23~25 (before fail)		
mm	Surface Mount Type, 13Wx13Lx3.8H		
	dB dB dB dBm dB dBm μsec mA V V Ω dBm	Min           MHz         329           dB         30           dB         30           dB         30           dB         30           dB         20           µsec         20           mA         20           Q         20           MB         20	Min         Typ           MHz         329           dB         30         31           dB         30         31           dB         0.8         ±0.1           dB         0.8         36           dBm         36         37           dB         -         -           mA         180         V           V         5         -           Ω         50         -           dBm         C.W 23~25 (before         -



2-stage Single Type

#### **More Information**

Website: www.asb.co.kr E-mail: sales@asb.co.kr


Tel: (82) 42-528-7223 Fax: (82) 42-528-7222

ASB Inc., 4th FI. Venture Town Bldg., 367-17 Goijeong-Dong, Seo-Gu, Daejon 302-716, Korea

Operating temperature is -40°C to +85°C.

1) OIP3 is measured with two tones at an output power of +4 dBm/tone separated by 1 MHz.
2) S11/S22 (max) is the worst value within the frequency band.
3) Switching time means the time that takes for output power to get stabilized to its final level after switching DC voltage from 0 V to V<sub>s</sub>.

# **Outline Drawing (Unit: mm)**

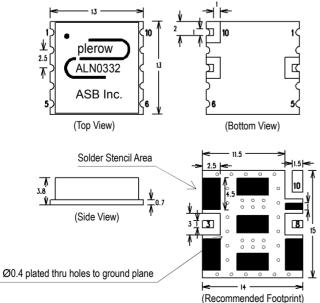

Pin Number	Function	
3	RF In	
8	RF Out	
10	Vs	
Others	Ground	

Note: 1. The number and size of ground via holes in a circuit board is critical for thermal RF grounding considerations.


2. We recommend that the ground via holes be placed on the bottom of all ground pins for better RF and thermal performance, as shown in the drawing at the left side.



# plerow<sup>™</sup> ALN0332

S21

# Internally Matched LNA Module

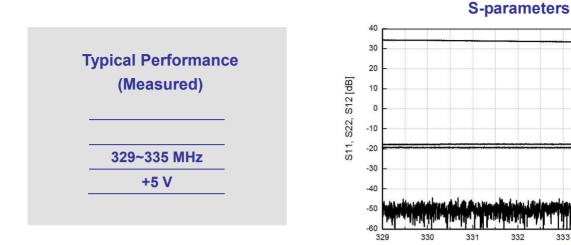

#### 29 28 B 27 S21 S11 26 S22 25 S12 24 23 1.14

334

32

31

30


22

335


S-parameters & K Factor 50 10 40 9 30 8 S21 S - Parameter [dB] 20 7 Stability Factor K 10 6 0 5 -10 4 S22 -20 3 S11 -30 2 S12 -40 -50 1 0 1000 2000 3000 4000 5000 0 6000 Frequency [MHz]

### **Noise Figure**


Frequency [MHz]

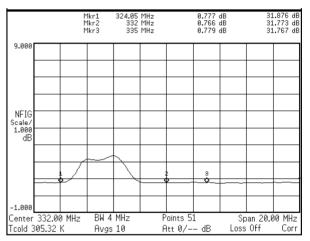

#### OIP3

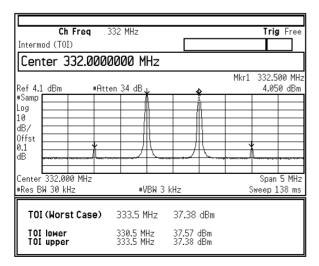


#### P1dB

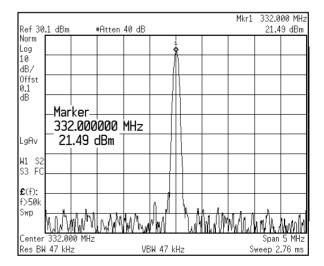




# **Application Circuit**

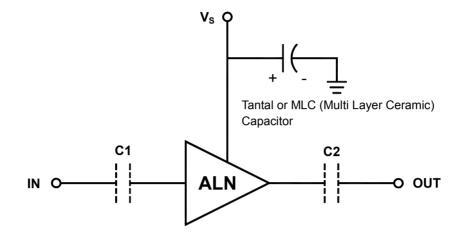


- The tantal or MLC (Multi Layer Ceramic) capacitor is optional and for bypassing the AC noise introduced from the DC supply. The capacitance value may be determined by customer's DC supply status. The capacitor should be placed as close as possible to V<sub>s</sub> pin and be connected directly to the ground plane for the best electrical performance.
- 2) DC blocking capacitors are always necessarily placed at the input and output port for allowing only the RF signal to pass and blocking the DC component in the signal. The DC blocking capacitors are included inside the ALN module. Therefore, C1 & C2 capacitors may not be necessary, but can be added just in case that the customer wants. The value of C1 & C2 is determined by considering the application frequency.

#### **Recommended Soldering Reflow Process**

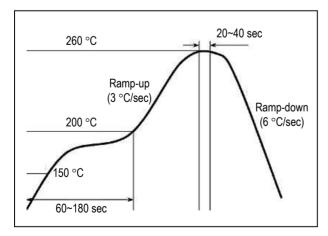

**Evaluation Board Layout** 



(for ALN Series – 13x13mm)