

2.54mm (0.100") PITCH CONNECTOR




Wire-to-Board
Wafer

YBD254B Series

DIP

Right Angle



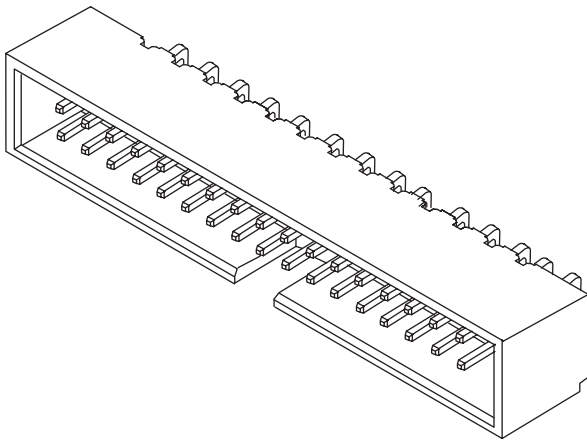


Material

I/NO	DESCRIPTION	TITLE	MATERIAL
1	WAFER	YBD254B	PBT, UL94 V Grade
2	PIN		Brass & Gold-Plated

Available Pin

PARTS NO.	DIM. A	DIM. B	DIM. C
YBD254B-20	50.70	48.00	40.64
YBD254B-22	50.70	48.00	40.64
YBD254B-26	50.70	48.00	40.64
YBD254B-33	50.70	48.00	40.64
YBD254B-34	50.70	48.00	40.64
YBD254B-40	58.32	55.62	48.26

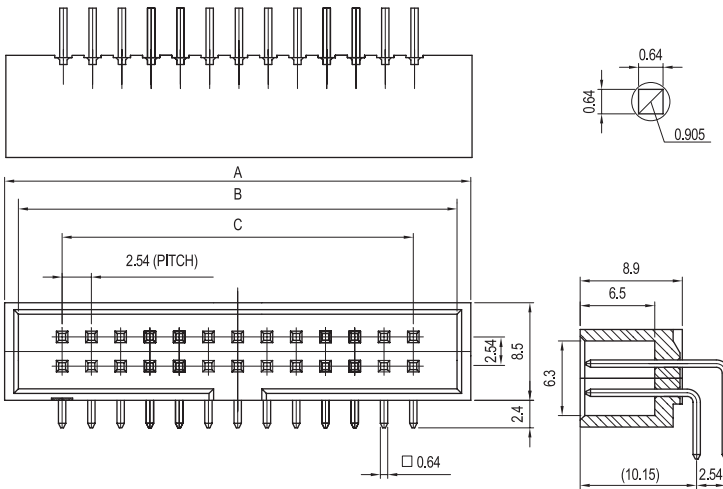

Specification

ITEM	SPEC
Voltage Rating	AC/DC 250V
Current Rating	AC/DC 3A
Operating Temperature	-25°C~+85°C
Contact Resistance	30mΩ MAX
Withstanding Voltage	AC1000V/1min
Insulation Resistance	1000MΩ MIN
Applicable Wire	-
Applicable P.C.B	1.2~1.6mm
Applicable FPC/FFC	-
Solder Height	-
Crimp Tensile Strength	-
UL FILE NO	-