


Ethernet Patch Cords with connectors IP67 RJ45 / IP67 RJ45 or IP67 RJ45 / std RJ45

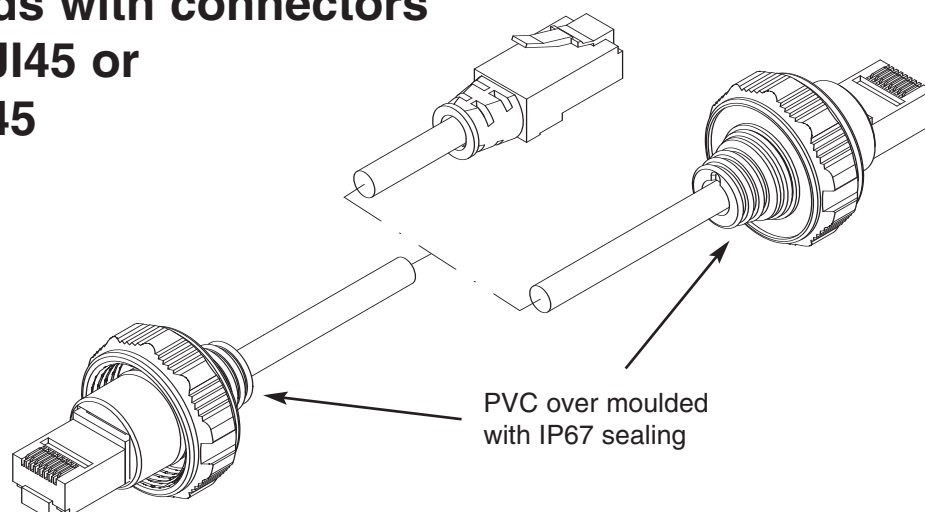

- Thread coupling with **IP67** sealing performance.
- **IK10** shocks resistant mated connector for harsh environments.
- Several standard patch cords lengths. Specific length on request.
- Long and precise **plug connector guiding** before electrical mating.
- **No tool** and assembly required.
- **Cat 5E or Cat 6** patch cords available.
- Polyurethane sheath version for oil, petrol and chemicals resistance.
- Option in stainless steel for food processing and chemical industry applications.
- Anti vandalism tight end thread coupling using wrench.

Zamac Metal Coupling Nut Plug	IP67 RJ45 / IP67 RJ45 Patch Cords		IP67 RJ45 / Std RJ45 Patch Cords	
	Reference	Reference	Reference	Reference
100 ohms Cable Sheath	S/FTP 4 pairs Cat 5E Polyurethane (VDE 0282 part 10)	STP 4 pairs Cat 6 PVC	S/FTP 4 pairs Cat 5E Polyurethane (VDE 0282 part 10)	STP 4 pairs Cat 6 PVC
1 meter cable	RJI CY12233E0100	RJI CW22233/0100	RJI CX12233E0100	RJI CV22233/0100
3 meters cable	RJI CY12233E0300	RJI CW22233/0300	RJI CX12233E0300	RJI CV22233/0300
5 meters cable	RJI CY12233E0500	RJI CW22233/0500	RJI CX12233E0500	RJI CV22233/0500
8 meters cable	RJI CY12233E0800	RJI CW22233/0800	RJI CX12233E0800	RJI CV22233/0800
Other lengths available by request				
Stainless steel coupling nut (by request)	RJI DY12233Exxxx	RJI DW22233/xxxx	RJI DX12233Exxxx	RJI DV22233/xxxx

xxxx = length in cm

Cable Sheath: PVC or Polyurethane.

Seal inside coupling Nut: Nitrile.

Coupling Nut; Zamac (Zinc alloy) with Cu 3 to 5 µm + Ni 2 to 4 µm plating protection (or Stainless Steel option).