



1	CS
2	/RES
3	A0
4	/WR
5	/RD
6	D0
7	D1
8	D2
9	D3
10	D4
11	D5
12	D6
13	D7
14	VDD
15	VSS
16	VOUT
17	C3+
18	C1-
19	C1+
20	C2+
21	C2-
22	VRS
23	V1
24	V2
25	V3
26	V4
27	V0
28	C86
29	P/S
30	/HPM

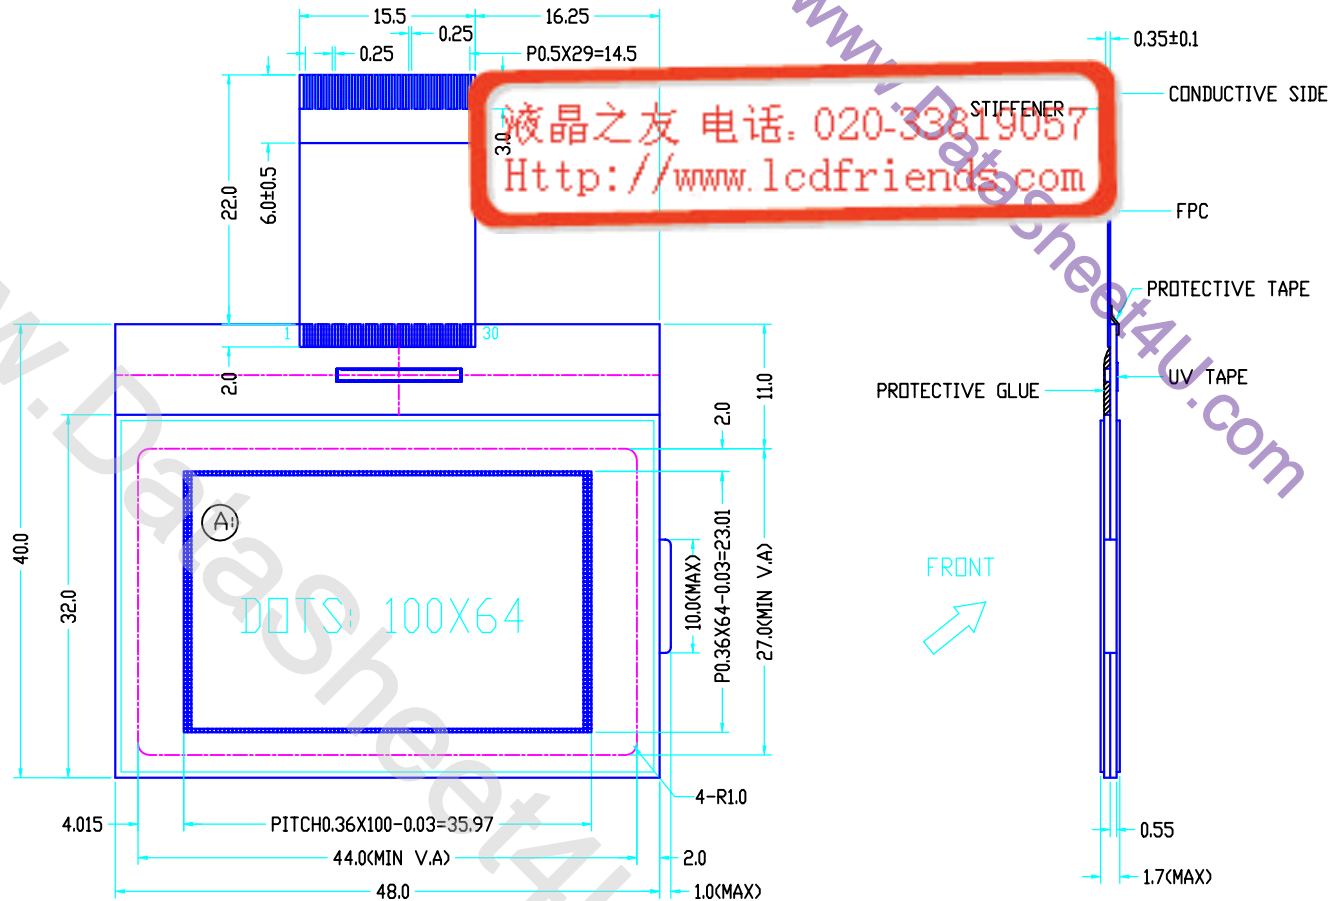


液晶之友 电话: 020-33819057
[Http://www.lcdfriends.com](http://www.lcdfriends.com)

- NOTES:
1. DISPLAY TYPE: FSTN
 2. VIEWING DIRECTION: 6:00
 3. POLARIZER MODE: TRANSFLECTIVE/POSITIVE
 4. LOGIC VOLTAGE: 3.0V
 5. LCD OPERATING VOLTAGE: 9.0V
 6. DRIVE METHOD: 1/65 DUTY 1/9 BIAS
 7. OPERATING TEMP.: -10°C +50°C
 8. STORAGE TEMP.: -15°C +60°C
 9. CONTROLLER: NT7502H-BDT
 10. WITHOUT BACKLIGHT
 11. UNMARKED TOLERANCES: ±0.3

DETAIL A:



 TIAN-MA MICROELECTRONICS CO. 6/F., CASTIC Building, Shennan Road, Central, Shenzhen, China		