


## MR11 Halogen Lamps with Dichroic Reflectors

Line No.	Part No.	Volts	Watts	Color Temp.	Life Hours	Burning Position	Filament Type	Beam Angle	Dimensions		Base Type	Drawing
				Degrees Kelvin					D	MOL		
1	L518	6.0	10	2,925	2,000	Any	C-6	11°	36.0	35.0	GZ4	A
2	L524	6.0	20	2,925	2,000	Any	C-6	10°	36.0	35.0	GZ4	A
3	L517A	12.0	12	2,925	2,000	Any	C-6	8°	36.0	35.0	GZ4	A
4	L519	12.0	20	2,925	2,000	Any	C-6	11°	36.0	35.0	GZ4	A
5	L514	12.0	35	2,950	2,000	Any	C-6	12°	36.0	35.0	GZ4	A
6	L526	24.0	20	2,925	2,000	Any	CC-6	15°	36.0	35.0	GZ4	A



Recommended Holders/Sockets Pages 28 & 29. Add -CG to part number for Cover Glass.

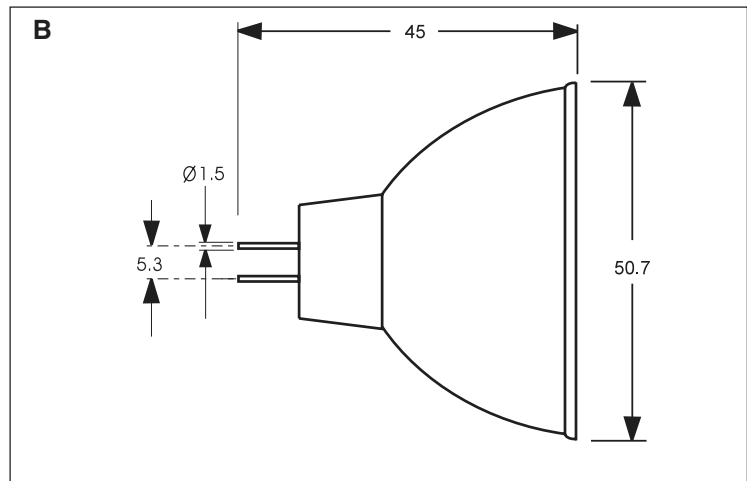

## MR16 Halogen Lamps with Dichroic Reflectors

Line No.	Part No.	Volts	Watts	Color Temp.	Life Hours	Burning Position	Filament Type	Beam Angle	Dimensions		Base Type	Drawing
				Degrees Kelvin					D	MOL		
7	L515	12.0	20	2,925	4,000	Any	C-6	11°	50.7	45.0	GX5.3	B
8	L520	12.0	42	3,050	4,000	Any	C-6	12°	50.7	45.0	GX5.3	B
9	L521	12.0	50	3,050	4,000	Any	C-6	13°	50.7	45.0	GX5.3	B
10	L522	12.0	65	3,050	4,000	Any	C-6	13°	50.7	45.0	GX5.3	B
11	L523	12.0	75	3,050	4,000	Any	C-6	14°	50.7	45.0	GX5.3	B

Recommended Holders/Sockets Pages 30 & 31. Add -CG to part number for Cover Glass.

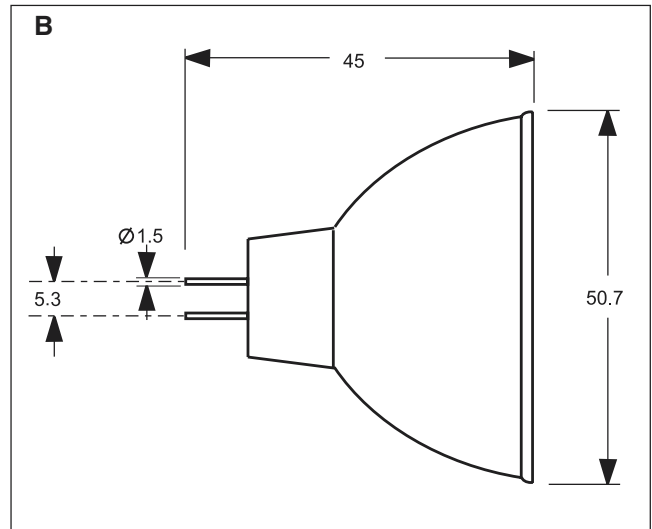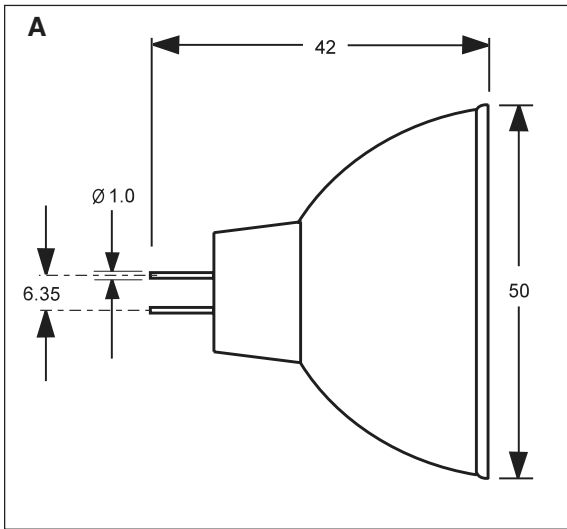

## MR16 Halogen Lamp with Focused Ellipsoidal Dichroic Reflectors

Line No.	Part No.	Reference No.	Volts	Watts	Color Temp.		Life Hours	Burning Position	Filament Type	Focal Distance*	Dimensions		Base	
					Degrees Kelvin	Kelvin					D	MOL	Type	Drawing
1	L6408	—	12.0	75	3,000	1,500	Any	C-8I	32	50.0	42.0	GZ6.35	A	
2	L6409	EKE	21.0	150	3,250	200	Any	CC-6	44	50.0	45.0	GX5.3	B	

\*Focal Distance is measured from the rim of the reflector.



Telephone: 781-935-4442  
Fax: 781-938-5867

sales@gilway.com  
www.gilway.com

**Gilway**  
Technical Lamp  
Engineering Catalog 169