

Photointerrupter(Transmissive)

KODENSHI

KPI-L05

DESCRIPTION

The photointerrupter high-performance standard type KPI-L05 combines a high-output GaAs IRED with a high sensitivity phototransistor.


FEATURES

- PWB direct mount type
- GAP : 5.0mm
- Easy to mount

APPLICATIONS

- Printers
- Copiers
- A T M
- Ticket Vending Machines

DIMENSIONS

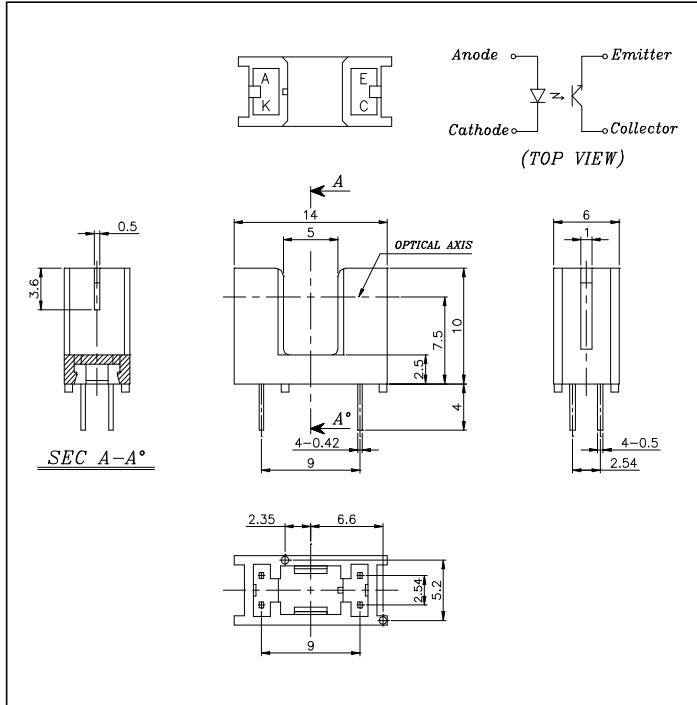

ABSOLUTE MAXIMUM RATINGS

(Ta=25 °C)

Parameter		Symbol	Rating	Unit
Input	Forward Current	I _F	60	mA
	Pulse Forward Current ^{*1}	I _{FP}	1	A
	Reverse Voltage	V _R	5	V
	Power Dissipation	P _D	100	mW
Output	Collector Emitter Voltage	V _{CEO}	30	V
	Emitter Collector Voltage	V _{ECO}	5	V
	Collector Current	I _C	40	mA
	Collector Power Dissipation	P _C	100	mW
Operating Temperature ^{*2}		T _{OPR}	-25 ~ +85	
Storage Temperature ^{*2}		T _{STG}	-40 ~ +85	
Soldering Temperature ^{*3}		T _{SOL}	260	

*1. Pulse width : tw 100μsec. period : T=10msec

*2. No icebound or dew

*3. For MAX. 5 seconds at the position of 1mm from the package









ELECTRO-OPTICAL CHARACTERISTICS

(Ta=25 °C)


Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward Voltage	V _F	I _F =20mA	-	1.2	1.7	V
	Reverse Current	I _R	V _R =5V	-	-	10	μA
	Capacitance	C _T	f=1KHz	-	25	-	pF
	Peak Wavelength	? _P	I _F =20mA	-	940	-	nm
Output	Dark Current	I _{CEO}	V _{CE} =10V, 0 Lux	-	-	100	nA
Coupled	Light Current	I _L	V _{CE} =5V, I _F = 20mA (Non-shading)	0.5	-	14	mA
	Collector Emitter Saturation Voltage	V _{CE(SAT)}	I _F =20mA, I _C =0.1mA	-	-	0.4	V
	Response Time	tr	V _{CC} =5V, I _C =2mA, R _L =100	-	5	-	μs
	Fall Time	tf		-	5	-	μs

Photointerrupter(Transmissive)

KPI-L05

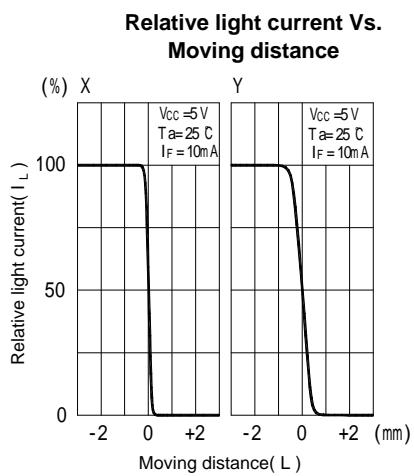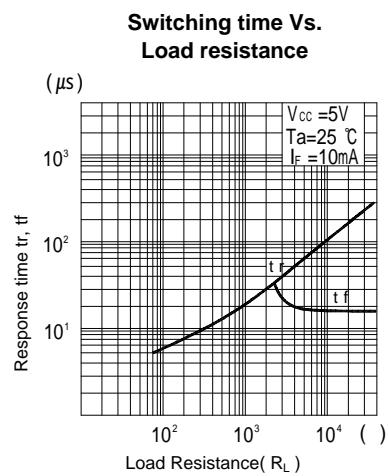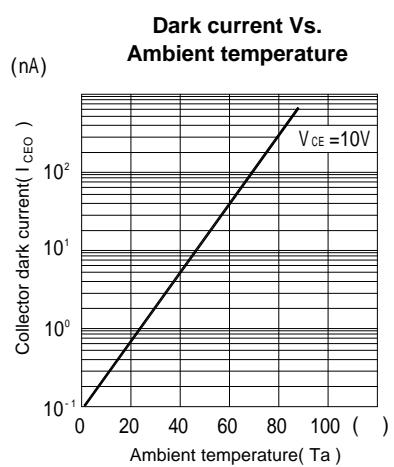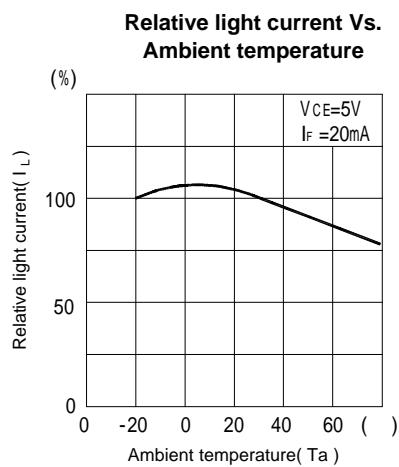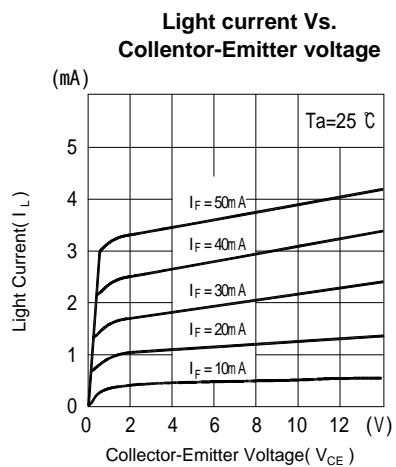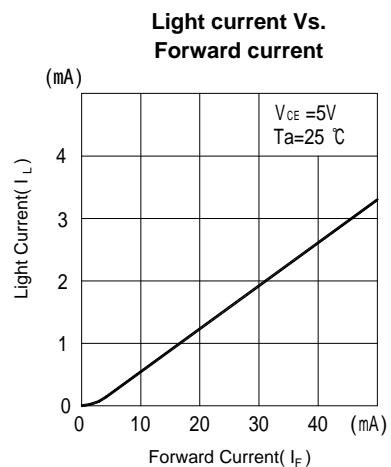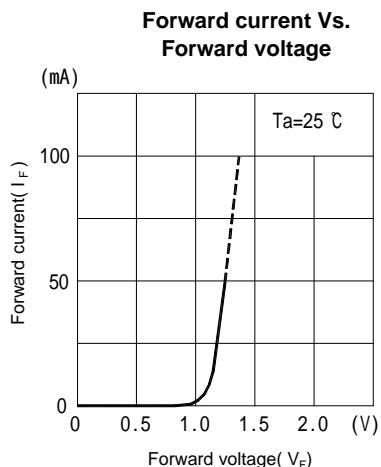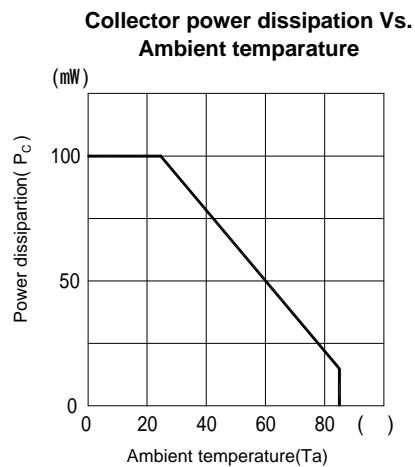

Response time measurement circuit

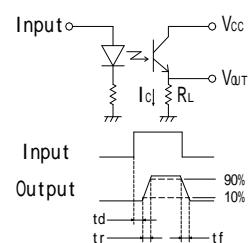

Method of measuring position detection characteristic

Optical Axis(X)

