



Micro Commercial Components

Micro Commercial Components  
 20736 Marilla Street Chatsworth  
 CA 91311  
 Phone: (818) 701-4933  
 Fax: (818) 701-4939

# SK32BG THRU SK310BG

## Features

- For Surface Mount Applications
- Extremely Low Thermal Resistance
- Easy Pick And Place
- High Temp Soldering: 250°C for 10 Seconds At Terminals\
- High Current Capability With Low Forward Voltage


## 3 Amp Schottky Rectifier 20 to 100 Volts

## Maximum Ratings

- Operating Temperature: -55°C to +125°C
- Storage Temperature: -55°C to +150°C
- Maximum Thermal Resistance; 10°C/W Junction To Lead


MCC Catalog Number	Device Marking	Maximum Reccurent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
SK32BG	SK32B	20V	14V	20V
SK33BG	SK33B	30V	21V	30V
SK34BG	SK34B	40V	28V	40V
SK35BG	SK35B	50V	35V	50V
SK36BG	SK36B	60V	42V	60V
SK38BG	SK38B	80V	56V	80V
SK310BG	SK310B	100V	70V	100V

## DO-215AA (HSMBG) (Round Lead)

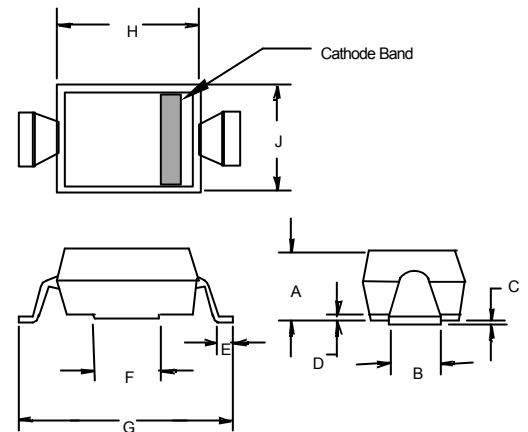

DIM.	DIMENSIONS				NOTE
	INCHES		MM		
A	.075	.116	1.90	2.95	
B	.078	.087	1.98	2.21	
C	.002	.008	.05	.20	
D	—	.02	—	.51	
E	.015	.03	.38	.76	
F	.065	.084	1.65	2.13	
G	.245	.276	6.22	7.00	
H	.160	.180	4.06	4.57	
J	.130	.151	3.30	3.83	

### SUGGESTED SOLDER PAD LAYOUT

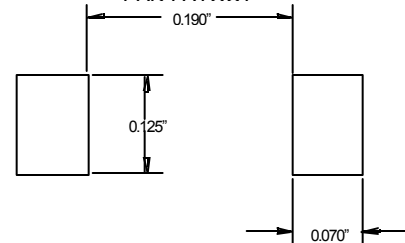


## Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current	$I_{F(AV)}$	3.0A	$T_J = 120^\circ\text{C}$
Peak Forward Surge Current	$I_{FSM}$	100A	8.3ms, half sine
Maximum Instantaneous Forward Voltage SK32BG-34BG SK35BG-36BG SK38BG-310BG	$V_F$	.50V .75V .85V	$I_{FM} = 3.0A$ ; $T_J = 25^\circ\text{C}^*$
Maximum DC Reverse Current At Rated DC Blocking Voltage	$I_R$	.5mA 20mA	$T_J = 25^\circ\text{C}$ $T_J = 100^\circ\text{C}$
Typical Junction Capacitance	$C_J$	45pF	Measured at 1.0MHz, $V_R=4.0V$

\*Pulse test: Pulse width 200  $\mu\text{sec}$ , Duty cycle 2%


# SK32BG thru SK310BG

Figure 1  
Typical Forward Characteristics

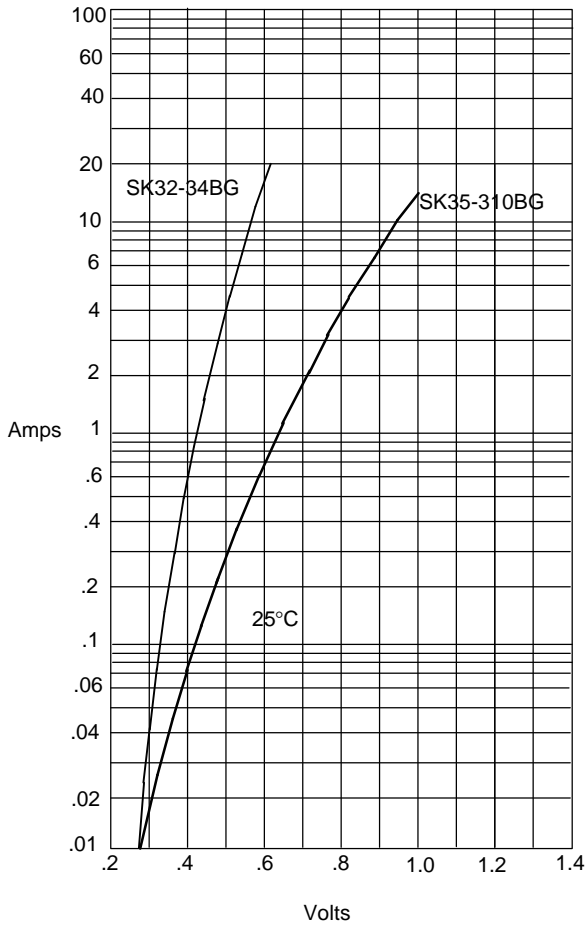


Instantaneous Forward Current - Amperes *versus*  
Instantaneous Forward Voltage - Volts

Figure 2  
Forward Derating Curve

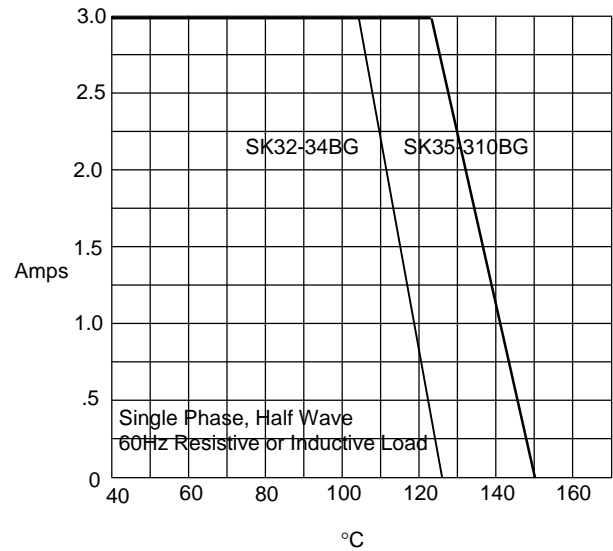

Average Forward Rectified Current - Amperes *versus*  
Ambient Temperature - °C


Figure 3  
Junction Capacitance

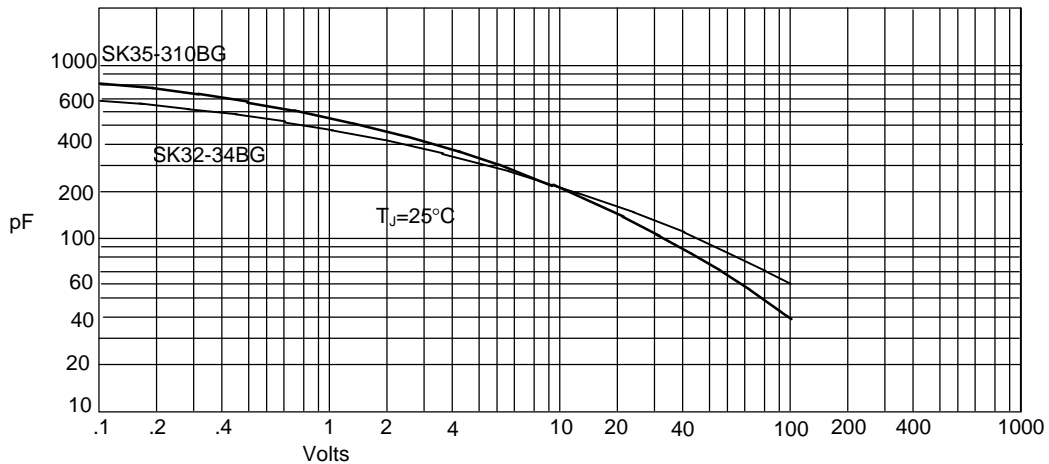

Junction Capacitance - pF *versus*  
Reverse Voltage - Volts

# SK32BG thru SK310BG


Figure 4  
Typical Reverse Characteristics

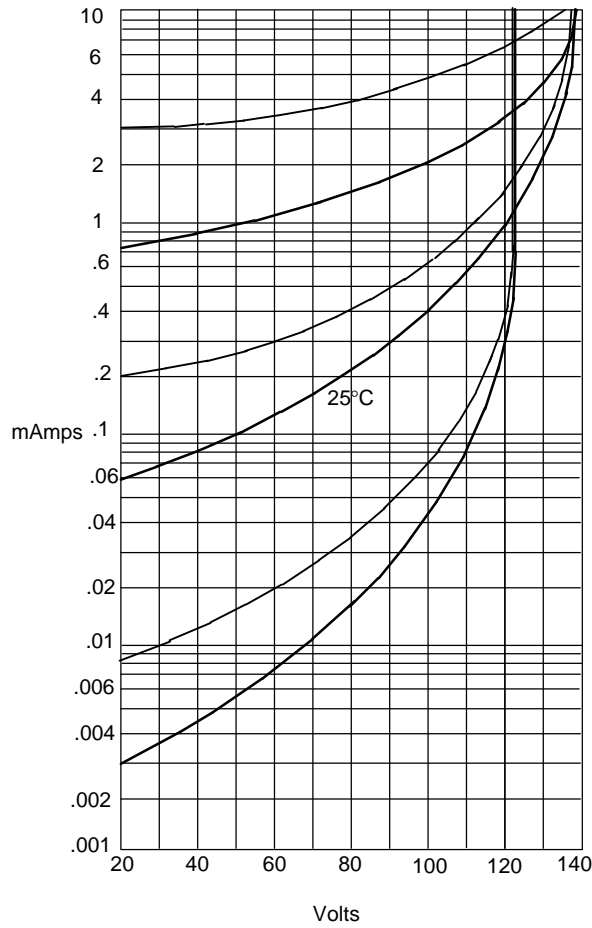

Instantaneous Reverse Leakage Current - MicroAmperes versus  
Percent Of Rated Peak Reverse Voltage - Volts

SK32-34BG ———  
SK35-310BG ———

Figure 5  
Peak Forward Surge Current

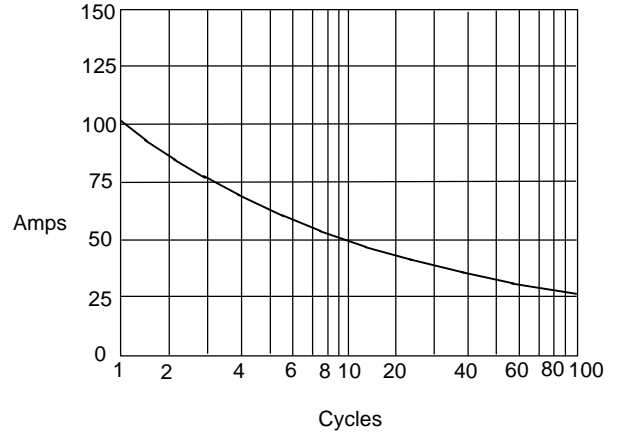

Peak Forward Surge Current - Amperes versus  
Number Of Cycles At 60Hz - Cycles