

SCHOTTKY DIODES MODULE TYPE 60A

Features


High Surge Capability
Types Up to 100V V_{RRM}

**60Amp Rectifier
10-100 Volts**

Maximum Ratings

Operating Temperature: -40°C to $+125^{\circ}\text{C}$
Storage Temperature: -40°C to $+125^{\circ}\text{C}$

| Part Number | Maximum Recurrent Peak Reverse Voltage | Maximum RMS Voltage | Maximum DC Blocking Voltage |
|-------------|--|---------------------|-----------------------------|
| FST6210SL | 10V | 7V | 10V |
| FST6215SL | 15V | 10V | 15V |
| FST6220SL | 20V | 14V | 20V |
| FST6230SL | 30V | 21V | 30V |
| FST6235SL | 35V | 25V | 35V |
| FST6240SL | 40V | 28V | 40V |
| FST6245SL | 45V | 32V | 45V |
| FST6260SL | 60V | 42V | 60V |
| FST6280SL | 80V | 56V | 80V |
| FST62100SL | 100V | 70V | 100V |

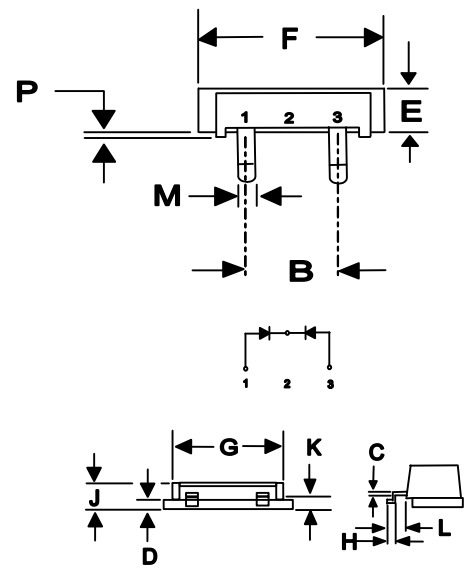

| DIM | INCHES | | MM | | NOTE |
|-----|--------|-------|-------|-------|------|
| | MIN | MAX | MIN | MAX | |
| A | ----- | ----- | ----- | ----- | |
| B | .400 | NOM | 10.16 | NOM | 2PL |
| C | .027 | .037 | 0.69 | 0.94 | |
| D | .088 | .098 | 2.24 | 2.49 | |
| E | .350 | .370 | 8.89 | 9.40 | |
| F | .777 | .797 | 19.74 | 20.24 | |
| G | .695 | .715 | 17.65 | 18.16 | |
| H | .104 | .124 | 2.64 | 3.15 | |
| J | .240 | .260 | 6.10 | 6.60 | |
| K | .115 | .135 | 2.92 | 3.43 | |
| L | .230 | .250 | 5.84 | 6.35 | |
| M | .065 | .085 | 1.65 | 2.16 | |
| P | .015 | .025 | 0.38 | 0.64 | |

Electrical Characteristics @ 25 °C Unless Otherwise Specified


| | | | |
|---|-----------------|-------------------------|--|
| Average Forward Current (Per pkg) | $I_{F(AV)}$ | 60A | $T_C = 105^{\circ}\text{C}$ |
| Peak Forward Surge Current (Per leg) | I_{FSM} | 600A | 8.3ms, half sine |
| Maximum Instantaneous Forward Voltage (Per leg) NOTE (1) | V_F | 0.55V 0.75V 0.84V | (FST6210SL~FST6245SL) (FST6260SL) (FST6280SL~FST62100SL) $I_{FM} = 30\text{ A}; T_J = 25^{\circ}\text{C}$ |
| Maximum Instantaneous Reverse Current At Rated DC Blocking Voltage (Per leg) NOTE (1) | I_R | 3.0 mA 500 mA | $T_J = 25^{\circ}\text{C}$ $T_J = 125^{\circ}\text{C}$ |
| Maximum Thermal Resistance Junction To Case (Per leg) | $R_{\theta jc}$ | 1.2°C/W | |

NOTE :

(1) Pulse Test: Pulse Width 300 usec, Duty Cycle < 2%

FST6210SL THRU FST62100SL

Figure .1-Typical Forward Characteristics

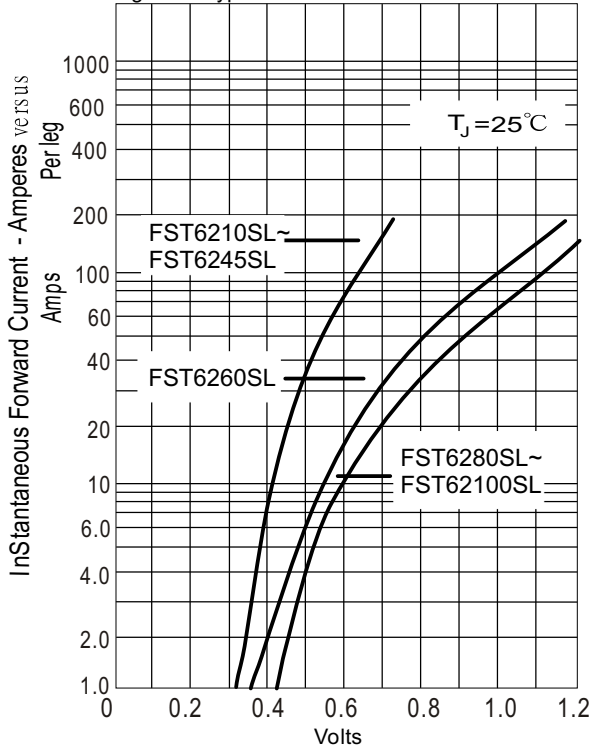

Instantaneous Forward Voltage - Volts

Figure .2-Forward Derating Curve

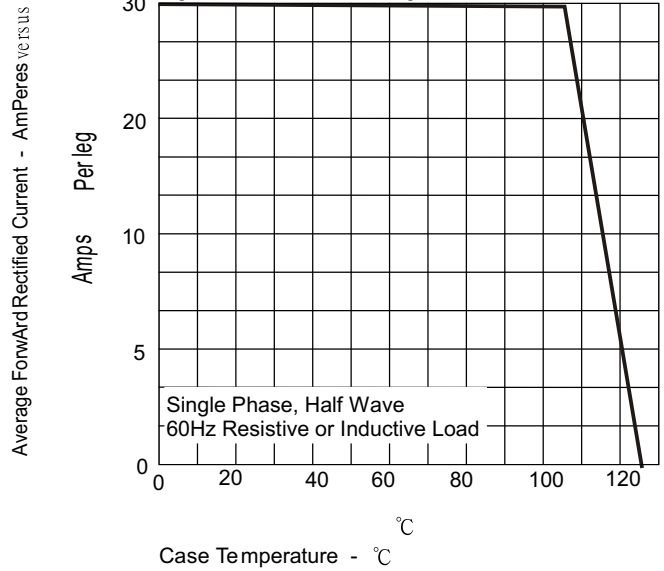


Figure .4-Typical Reverse Characteristics


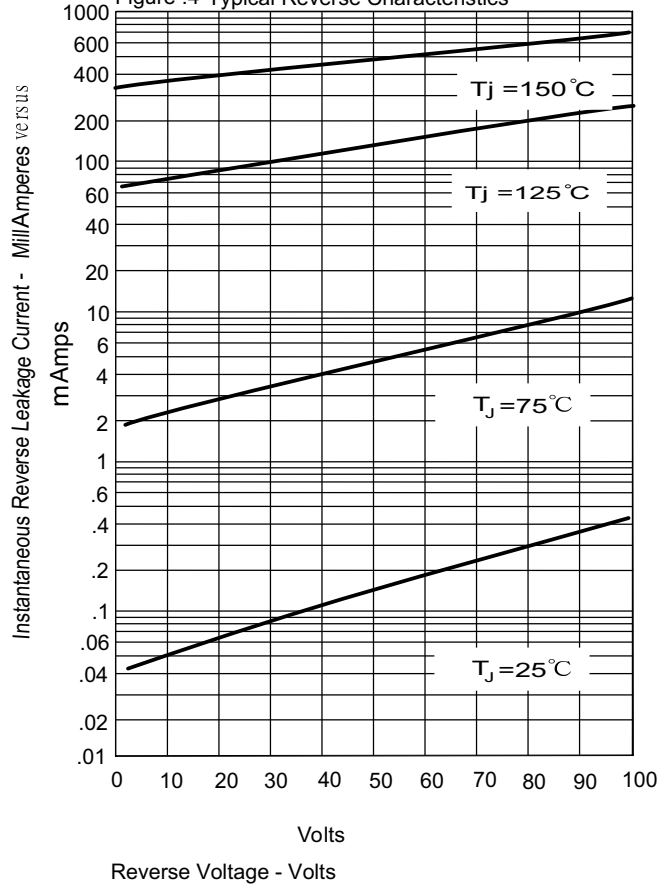


Figure .3-Peak Forward Surge Current

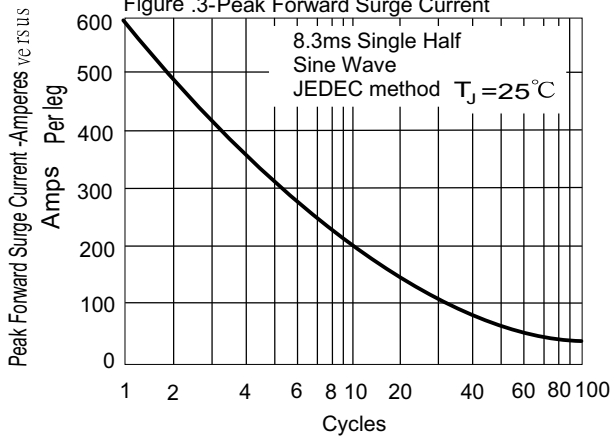

Number Of Cycles At 60Hz - Cycles