

SINGLE LAMP LED BULB

Data Sheet

Description:

These single lamp LED Bulbs are specifically designed for flashlight electric equipment, indicator light switch and where a wide view angle. The 4.6mm round shaped radiation pattern (60°) and high luminous intensity ensure that these devices are excellent for wide field of view outdoor applications where a wide viewing angle and readability in sunlight are essential.

High efficiency LED materials are used in this Bulb. Every lamp is made with an advanced optical grade epoxy offering superior high shock and high temperature resistance in outdoor applications.

Feature:

- Wide view angle
- High luminous output
- Seven kind color
- Solid-state Vibration resistant
- Saving power
- Long life

Option:

- 6V to 240V AC or DC
- Other industry standard base


A-BRIGHT

A-BRIGHT INDUSTRIAL CO.,LTD.

Part No.: AB-46W3-24VD-T5

Single Lamp LED Bulb

PACKAGE DIMENSIONS:

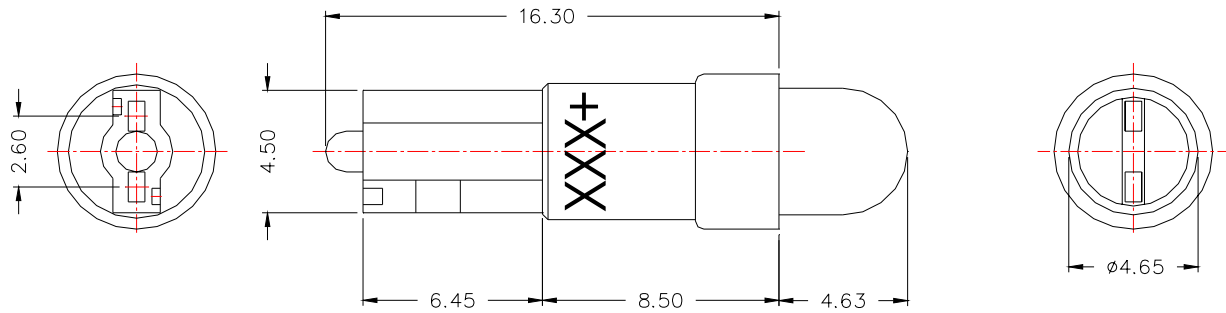

NOTE:

- 1. All dimensions are in millimeter.
- 2. Wedge base T-5.
- 3. All tolerance are $\pm 0.25\text{mm}$.

Part No.: AB-46W3-24VD-T5

Single Lamp LED Bulb

FEATURE:

- SUPER LUMINOSITY WHITE LED (InGaN).
- WATER CLEAR PACKAGE.
- 4.6mm ALL RESIN MOLD.
- WIDE VIEWING ANGLE.
- BASE MODEL T-5.
- DC ELECTRIC.

ABSOLUTE MAXIMUM RATING: Ta = 25 °C

- PEAK OPERATE VOLTAGE..... 28 V
- OPERATING TEMPERATURE..... -25 TO +85°C
- STORAGE TEMPERATURE..... -35 TO +100°C
- LED BULB LIFE..... 20000 HOURS
(LUMINANCE REDUCES to 50%)

ABSOLUTE OPTICAL CHARACTERISTIC Ta= 25°C

| PARAMETER | | SYMBOL | MIN | TYP | MAX | UNIT |
|--------------------------|--------------|--------|------|------|------|------|
| Operate Voltage | | V | ---- | 24 | 28 | V |
| Luminous Intensity | IF= 20 mA | Iv | 500 | 600 | ---- | mcd |
| Chromaticity Coordinates | IF= 20 mA | X | ---- | 0.31 | ---- | ---- |
| | | Y | ---- | 0.32 | ---- | |
| Forward Current | VIN= 24 V DC | IF | ---- | 20 | ---- | mA |
| Viewing Angle | | 2θ1/2 | ---- | 60 | ---- | deg |

Part No.: AB-46W3-24VD-T5

Single Lamp LED Bulb

COLOR RANKS:

Conventional A-Rank (Approximate Color Temperature: 6,500-10,000K)

| | Rank A | | | |
|---|--------|-------|-------|-------|
| X | 0.280 | 0.264 | 0.283 | 0.296 |
| Y | 0.248 | 0.267 | 0.305 | 0.276 |

Conventional B-Rank (Approximate Color Temperature: 5,500-6,500K)

| | Rank B0 | | | |
|---|---------|-------|-------|-------|
| X | 0.287 | 0.283 | 0.330 | 0.330 |
| Y | 0.295 | 0.305 | 0.360 | 0.339 |

| | Rank B1 | | | |
|---|---------|-------|-------|-------|
| X | 0.296 | 0.287 | 0.330 | 0.330 |
| Y | 0.276 | 0.295 | 0.339 | 0.318 |

Conventional C-Rank (Approximate Color Temperature: 4,500-5,500K)

| | Rank C | | | |
|---|--------|-------|-------|-------|
| X | 0.330 | 0.330 | 0.361 | 0.356 |
| Y | 0.318 | 0.360 | 0.385 | 0.351 |