


## SILICON BRIDGE RECTIFIERS

REVERSE VOLTAGE - 50 to 1000 Volts  
FORWARD CURRENT - 5.0 Amperes

### FEATURES

- Plastic material used carries UL recognition 94V-0
- High surge current capability
- Ideal for printed circuit board
- Typical IR less than 1mA
- Built-in printed board stand offs
- High temperature soldering guaranteed:  
250°C for 5 seconds

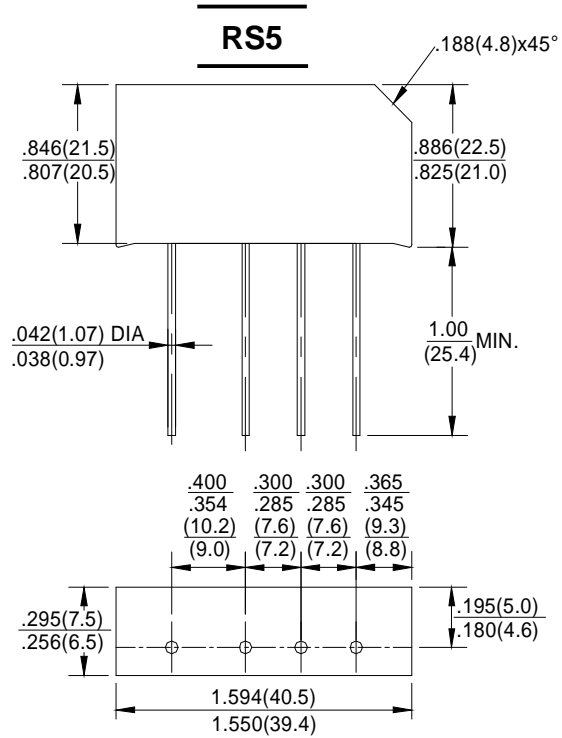

Dimensions in inches and (millimeters)

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

resistive or inductive load at 50HZ or 60HZ.

CHARACTERISTICS	SYMBOL	RS501	RS502	RS503	RS504	RS505	RS506	RS507	UNIT
Maximum Recurrent Peak Reverse Voltage	V <sub>RM</sub>	60	125	200	400	600	800	1000	V
Maximum RMS Voltage	V <sub>RMS</sub>	40	80	125	250	380	500	630	V
Maximum DC Blocking Voltage	V <sub>DC</sub>	65	125	200	400	600	800	1000	V
Maximum Repetitive Peak Reverse Voltage (Note1)	V <sub>RRM</sub>	100	190	300	600	900	1200	1500	V
Maximum Average Forward Output Current I <sub>FAVM</sub> natural cooling, T <sub>A</sub> =45°C									
C-Load	I(A)				3.3				A
R+L-Load					4.0				
on chassis=31in <sup>2</sup> , 200cm <sup>2</sup> , T <sub>A</sub> =45°C									
C-Load					5.0				
R+L-Load					6.0				
Maximum Repetitive Peak Forward Surge Current I <sub>FSM</sub>	APK				30				A
Peak Forward Surge Current Single @T <sub>J</sub> =25°C	I <sub>FSM</sub>				250				APK
Sine-Wave on Rated Load (JEDEC Method) @T <sub>J</sub> =150°C					200				
I <sup>2</sup> t Rating for Fusing @T <sub>J</sub> =25°C	I <sup>2</sup> t				312				A <sup>2</sup> S
(t<8.3ms) @T <sub>J</sub> =150°C					200				
Maximum Series Resistance at V <sub>RMS</sub>		0.15	0.3	0.6	1.2		1.8		OHM
Maximum Reservoir Capacitor		10000	5000	5000	2500		1000		uF
Maximum Reverse Current at @T <sub>J</sub> =25°C	I <sub>R</sub>				10.0				uA
Rated Repetitive Peak Voltage @T <sub>J</sub> =150°C						6.0			
Maximum instantaneous Forward Drop per Element at 5.0A	V <sub>F</sub>				1.0				V
Operating and Storage Temperature Range	T <sub>J</sub> , T <sub>STG</sub>				-55 to +125				°C

NOTES:1. Valid for each bridge element.

# RATING AND CHARACTERISTIC CURVES

## RS5 SERIES



FIG.1- DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

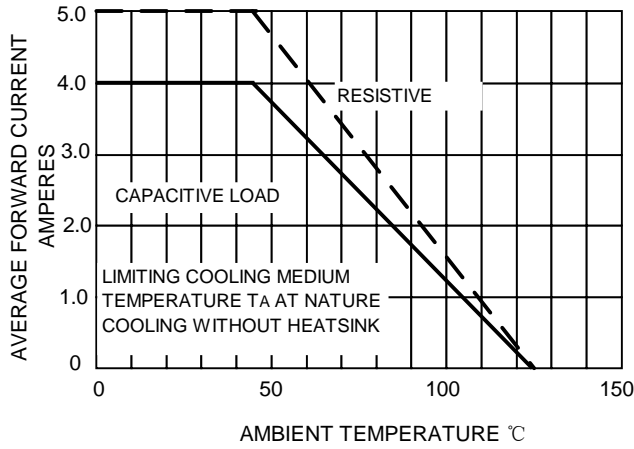


FIG.1- DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

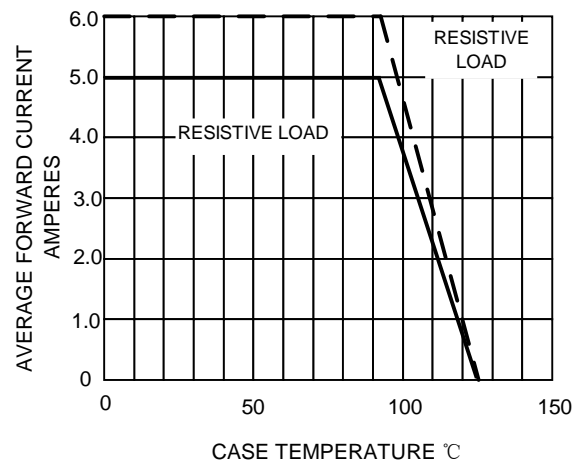


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTIC PER BRIDGE ELEMENT

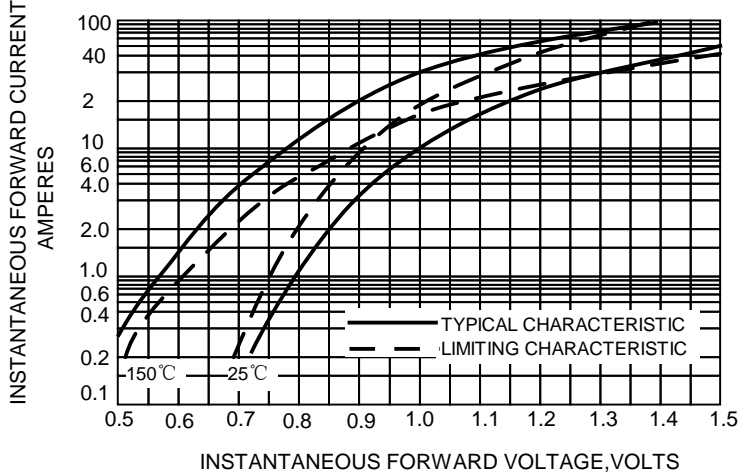


FIG.4-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

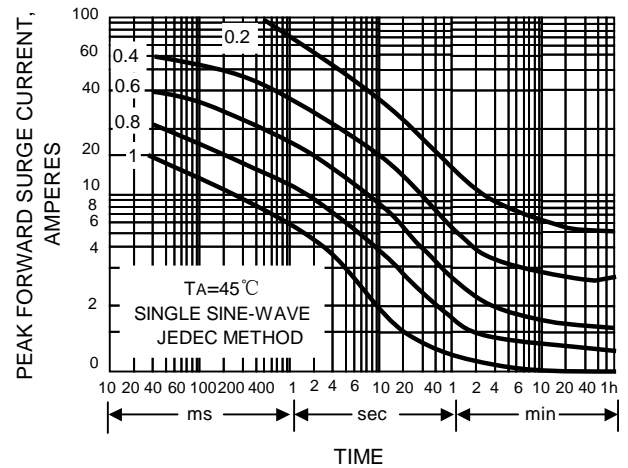


FIG.5-MAXIMUM TOTAL BRIDGE POWER DISSIPATION

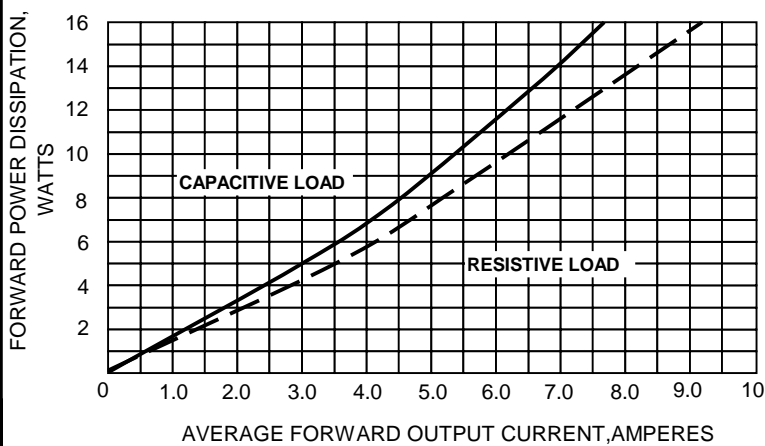


FIG.6-MEAN AVERAGE FORWARD CURRENT CASE TEMPERATURE

