




MUR120

Reverse Voltage 200 Volts Forward Current 1.0 Ampere

Ultrafast Plastic Rectifier

Features


- ◆ Plastic package has Underwriters Laboratories Flammability Classification 94V-0
- ◆ Ideally suited for use in very high frequency switching power supplies, inverters and as a free wheeling diode
- ◆ Ultrafast recovery time for high efficiency
- ◆ Excellent high temperature switching
- ◆ Glass passivated junction



DO-204AC (DO-15)

Mechanical Data

- ◆ Cases: JEDEC DO-204AC(DO-15), molded plastic body over passivated chip
- ◆ Terminals: Axial leads, solderable per MIL-STD-750, Method 2026
High temperature soldering guaranteed:
250°C/10Seconds, 0.375" (9.5mm) lead length at 5 lbs. (2.3Kg) tension
- ◆ Polarity: Color band denotes cathode end
- ◆ Mounting position: Any
- ◆ Weight: 0.015 ounce, 0.4 gram

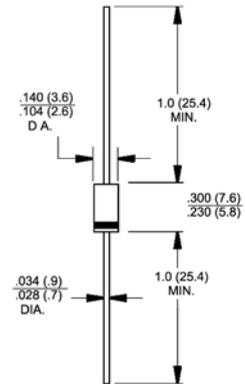

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Parameter	Symbols	MUR120	Units
Maximum repetitive peak reverse voltage	V_{RRM}	200	Volts
Working peak reverse voltage	V_{RWM}	200	Volts
Maximum DC blocking voltage	V_{DC}	200	Volts
Maximum average forward rectified current at $T_A=130^\circ\text{C}$	$I_{F(AV)}$	1.0	Amp
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	35.0	Amps
Maximum instantaneous forward voltage (Note 1) at $I_F=1.0\text{A}$, $T_J=25^\circ\text{C}$ at $I_F=1.0\text{A}$, $T_J=150^\circ\text{C}$	V_F	0.875 0.710	Volts
Maximum instantaneous reverse current at rated DC blocking voltage (Note 1) $T_J=25^\circ\text{C}$ $T_J=150^\circ\text{C}$	I_R	2.0 50	μA μA
Maximum reverse recovery time at $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_L=0.25\text{A}$	t_{rr}	25	nS
Maximum reverse recovery time at $I_F=1.0\text{A}$, $di/dt=50\text{A}/\mu\text{s}$, $V_R=30\text{V}$, $I_R=10\% I_{RM}$	t_{rr}	35	nS
Maximum forward recovery time at $I_F=1.0\text{A}$, $di/dt=100\text{A}/\mu\text{s}$, I_{RC} to 1.0V	t_{fr}	25	nS
Typical thermal resistance junction to ambient (Note 2)	$R_{\theta JA}$	27	$^\circ\text{C}/\text{W}$
Operating junction and storage temperature range	T_J , T_{STG}	-55 to +175	$^\circ\text{C}$

- Notes:**
1. Pulse test: $t_p=300\mu\text{s}$, duty cycle < 2%
 2. Lead length = 3/8" on P.C. Board with 1.5" x 1.5" copper surface

RATINGS AND CHARACTERISTIC CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig. 1 – Forward Current Derating Curve

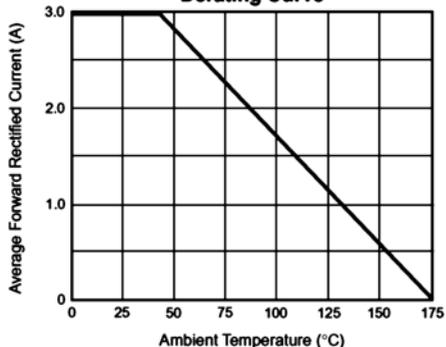


Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current

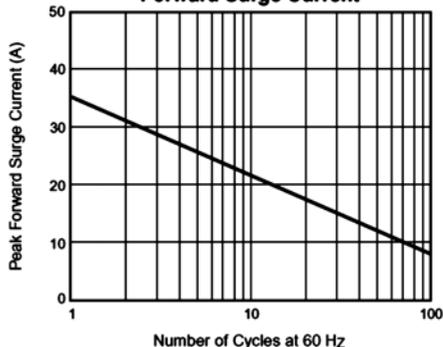


Fig. 3 – Typical Instantaneous Forward Characteristics (MUR120)

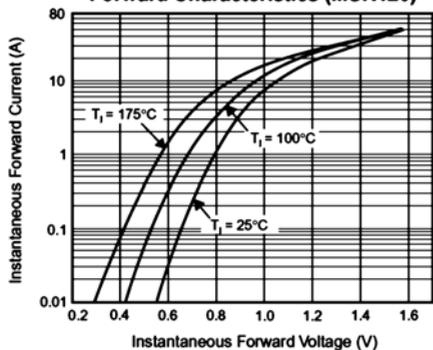


Fig. 4 – Typical Reverse Leakage Characteristics (MUR120)

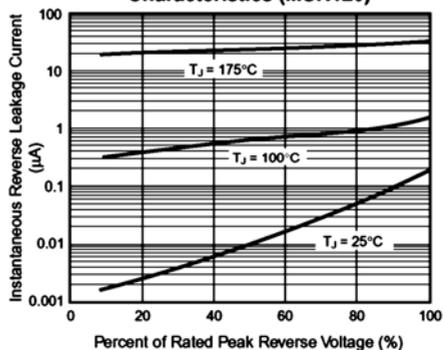


Fig. 5 – Typical Junction Capacitance

