



TAPE SPECIFICATIONS

ZTA4.00MG-TF

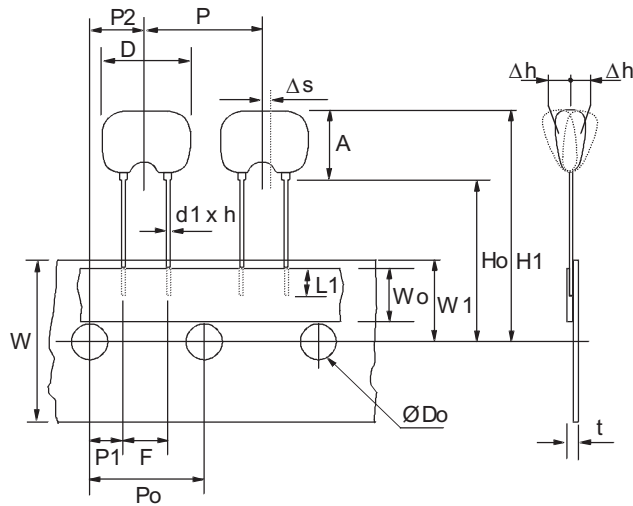

Item	Code	Dimensions (mm)
Body diameter	D	10.0 max.
Body height	A	7.5 max.
Lead dimensions	d1xh	0.5x0.3±0.1
Lead in tape	L1	3.0 min.
Component pitch	P	12.7±0.5
Hole pitch	Po	12.7±0.2
Hole centre to lead	P1	3.85±0.5
Hole centre to component	P2	6.35±0.5
Lead spacing	F	5.0,+0.5,-0.2
Tape deviation	Δh	0±1.0
Carrier tape width	W	18.0±0.5
Hold-down tape width	W0	6.0 min.
Hole position	W1	9.0±0.5
Hold-down tape width	W2	0,+0.5,-0
Tope to reference distance	Ho	18.0±0.5
Reference to top	H1	26.0 max.
Hole diameter	Do	Ø4.0±0.2
Total tape thickness	t	0.6±0.2
Deviation across body centre	Δs	0±0.1

ZTT4.00MG-TF

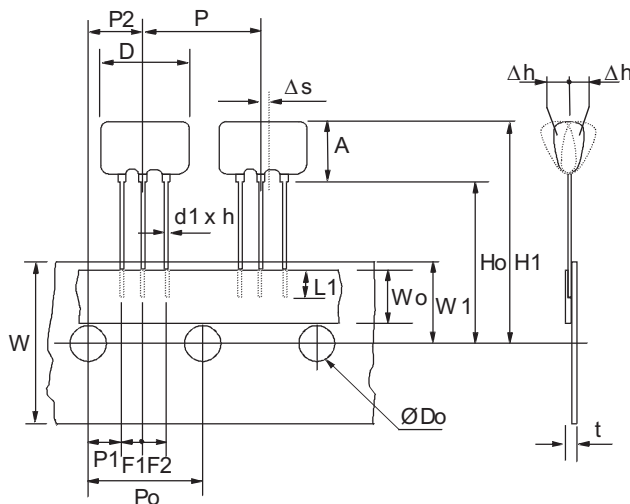

Item	Code	Dimensions (mm)
Body diameter	D	10.0 max.
Body height	A	6.0 max.
Lead dimensions	d1xh	0.5x0.3±0.1
Lead in tape	L1	3.0 min.
Component pitch	P	12.7±0.5
Hole pitch	Po	12.7±0.2
Hole centre to lead	P1	3.85±0.5
Hole centre to component	P2	6.35±0.5
Lead spacing	F	5.0,+0.5,-0.2
Tape deviation	Δh	0±1.0
Carrier tape width	W	18.0±0.5
Hold-down tape width	W0	6.0 min.
Hole position	W1	9.0±0.5
Hold-down tape width	W2	0,+0.5,-0
Tope to reference distance	Ho	18.0±0.5
Reference to top	H1	24.5 max.
Hole diameter	Do	Ø4.0±0.2
Total tape thickness	t	0.6±0.2
Deviation across body centre	Δs	0±0.1