

Silicon PNP Power Transistors

2SB1023

DESCRIPTION


- With TO-220Fa package
- High DC current gain
- Low saturation voltage
- Complement to type 2SD1413

APPLICATIONS

- Power amplifier and switching applications
- Hammer drive,pulse motor drive applications

PINNING

| PIN | DESCRIPTION |
|-----|-------------|
| 1 | Base |
| 2 | Collector |
| 3 | Emitter |

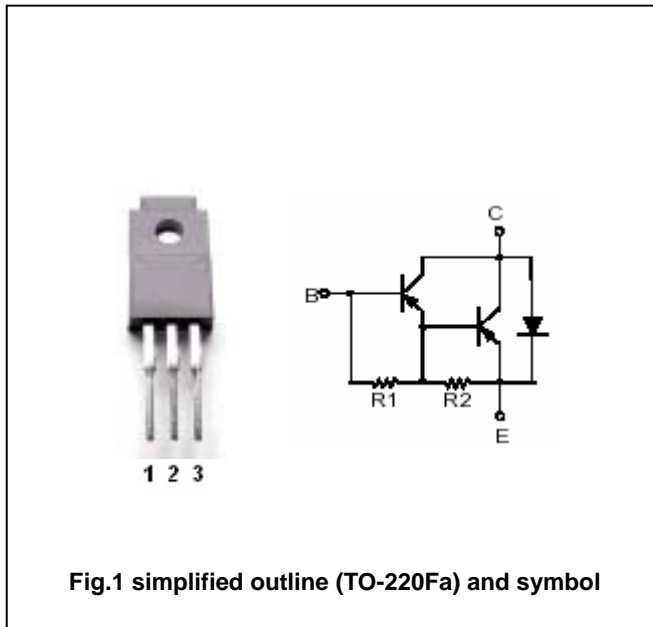

Absolute maximum ratings(Ta=25)

| SYMBOL | PARAMETER | CONDITIONS | VALUE | UNIT |
|------------------|-----------------------------|--------------------|---------|------|
| V _{CBO} | Collector-base voltage | Open emitter | -60 | V |
| V _{CEO} | Collector -emitter voltage | Open base | -40 | V |
| V _{EBO} | Emitter-base voltage | Open collector | -5 | V |
| I _C | Collector current | | -3 | A |
| I _B | Base current | | -0.5 | A |
| P _C | Collector power dissipation | T _C =25 | 20 | W |
| T _j | Junction temperature | | 150 | |
| T _{stg} | Storage temperature | | -55~150 | |

Silicon PNP Power Transistors

2SB1023

CHARACTERISTICS

T_j=25 unless otherwise specified

| SYMBOL | PARAMETER | CONDITIONS | MIN | TYP. | MAX | UNIT |
|----------------------|--------------------------------------|--|------|------|------|------|
| V _{(BR)CEO} | Collector-emitter breakdown voltage | I _C =-25mA; I _B =0 | -40 | | | V |
| V _{CEsat} | Collector-emitter saturation voltage | I _C =-2A ; I _B =-4mA | | | -1.5 | V |
| V _{BEsat} | Base-emitter saturation voltage | I _C =-2A ; I _B =-4mA | | | -2.0 | V |
| I _{CBO} | Collector cut-off current | V _{CB} =-60V; I _E =0 | | | -20 | μA |
| I _{EBO} | Emitter cut-off current | V _{EB} =-5V; I _C =0 | | | -2.5 | mA |
| h _{FE-1} | DC current gain | I _C =-1A ; V _{CE} =-2V | 2000 | | | |
| h _{FE-2} | DC current gain | I _C =-3A ; V _{CE} =-2V | 1000 | | | |

Switching times

| | | | | | | |
|------------------|--------------|--|--|------|--|----|
| t _{on} | Turn-on time | I _{B1} =-I _{B2} =-6mA V _{CC} =-30V ,R _L =10 | | 0.30 | | μs |
| t _{stg} | Storage time | | | 0.60 | | μs |
| t _f | Fall time | | | 0.25 | | μs |

PACKAGE OUTLINE

