

Dual General Purpose Transistor

Features

- We declare that the material of product compliance with RoHS requirements.

MAXIMUM RATINGS

| Rating | Symbol | Value | | Unit |
|--------------------------------|-----------|-------|-------|------|
| | | 2907 | 2907A | |
| Collector–Emitter Voltage | V_{CEO} | -40 | -60 | Vdc |
| Collector–Base Voltage | V_{CBO} | -60 | | Vdc |
| Emitter–Base Voltage | V_{EBO} | -5.0 | | Vdc |
| Collector Current — Continuous | I_C | -600 | | mAdc |

THERMAL CHARACTERISTICS

| Characteristic | Symbol | Max | Unit |
|---|-----------------|-------------|---------------------------|
| Total Device Dissipation FR–5 Board, (1) $T_A = 25^\circ\text{C}$ | P_D | 225 | mW |
| Derate above 25°C | | 1.8 | mW/ $^\circ\text{C}$ |
| Thermal Resistance, Junction to Ambient | $R_{\theta JA}$ | 556 | $^\circ\text{C}/\text{W}$ |
| Total Device Dissipation Alumina Substrate, (2) $T_A = 25^\circ\text{C}$ | P_D | 300 | mW |
| Derate above 25°C | | 2.4 | mW/ $^\circ\text{C}$ |
| Thermal Resistance, Junction to Ambient | $R_{\theta JA}$ | 417 | $^\circ\text{C}/\text{W}$ |
| Junction and Storage Temperature | T_J, T_{stg} | -55 to +150 | $^\circ\text{C}$ |

DEVICE MARKING

LMBT2907LT1G = M2B, LMBT2907ALT1G = 2F

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted.)

| Characteristic | Symbol | Min | Max | Unit |
|----------------|--------|-----|-----|------|
|----------------|--------|-----|-----|------|

OFF CHARACTERISTICS



| | | | | |
|--|---------------|------|--------|-----------------|
| Collector–Emitter Breakdown Voltage(3) ($I_C = -10\text{ mAdc}, I_E = 0$) | $V_{(BR)CEO}$ | | | Vdc |
| | LMBT2907 | -40 | — | |
| | LMBT2907A | -60 | — | |
| Collector–Emitter Breakdown Voltage($I_C = -10\ \mu\text{Adc}, I_E = 0$) | $V_{(BR)CBO}$ | -60 | — | Vdc |
| Emitter–Base Breakdown Voltage($I_E = -10\ \mu\text{Adc}, I_C = 0$) | $V_{(BR)EBO}$ | -5.0 | — | Vdc |
| Collector Cutoff Current($V_{CB} = -30\text{Vdc}, I_{BE(OFF)} = -0.5\text{Vdc}$) | I_{CEX} | — | -50 | nAdc |
| Collector Cutoff Current ($V_{CB} = -50\text{Vdc}, I_E = 0$) | I_{CBO} | | | μAdc |
| | LMBT2907 | — | -0.020 | |
| | LMBT2907A | — | -0.010 | |
| | LMBT2907 | — | -20 | |
| ($V_{CB} = -50\text{Vdc}, I_E = 0, T_A = 125^\circ\text{C}$) | LMBT2907A | — | -10 | |
| Base Current($V_{CE} = -30\text{Vdc}, V_{EB(OFF)} = -0.5\text{Vdc}$) | I_B | — | -50 | nAdc |

1. FR–5 = 1.0 x 0.75 x 0.062 in.

2. Alumina = 0.4 x 0.3 x 0.024 in. 99.5% alumina.

3. Pulse Test: Pulse Width $\leq 300\ \mu\text{s}$, Duty Cycle $\leq 2.0\%$.

LMBT2907ADW1T1G

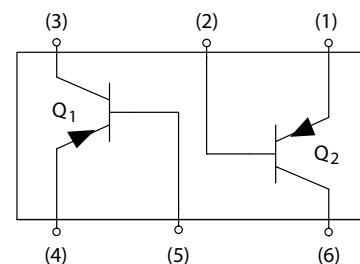

ORDERING INFORMATION

| Device | Marking | Shipping |
|-----------------|---------|------------------|
| LMBT2907ADW1T1G | 2F | 3000 Units/Reel |
| LMBT2907ADW1T3G | 2F | 10000 Units/Reel |

LMBT2907ADW1T1G
ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted) (Continued)

| Characteristic | Symbol | Min | Max | Unit |
|---|---------------|-----|--------------|------|
| ON CHARACTERISTICS | | | | |
| DC Current Gain ($I_C = -0.1\text{mA dc}$, $V_{CE} = -10\text{V dc}$) | h_{FE} | 35 | — | — |
| | LMBT2907 | 75 | — | — |
| | LMBT2907A | — | — | — |
| ($I_C = -1.0\text{mA dc}$, $V_{CE} = -10\text{V dc}$) | LMBT2907 | 50 | — | — |
| | LMBT2907A | 100 | — | — |
| ($I_C = -10\text{mA dc}$, $V_{CE} = -10\text{V dc}$) | LMBT2907 | 75 | — | — |
| | LMBT2907A | 100 | — | — |
| ($I_C = -150\text{mA dc}$, $V_{CE} = -10\text{V dc}$)(3) | LMBT2907 | — | — | — |
| | LMBT2907A | 100 | 300 | — |
| ($I_C = -500\text{mA dc}$, $V_{CE} = -10\text{V dc}$)(3) | LMBT2907 | 30 | — | — |
| | LMBT2907A | 50 | — | — |
| Collector–Emitter Saturation Voltage(3) ($I_C = -150\text{mA dc}$, $I_B = -15\text{mA dc}$) ($I_C = -500\text{mA dc}$, $I_B = -50\text{mA dc}$) | $V_{CE(sat)}$ | — | -0.4 -1.6 | Vdc |
| Base–Emitter Saturation Voltage(3) ($I_C = -150\text{mA dc}$, $I_B = -15\text{mA dc}$) ($I_C = -500\text{mA dc}$, $I_B = -50\text{mA dc}$) | $V_{BE(sat)}$ | — | -1.3 -2.6 | Vdc |

SMALL-SIGNAL CHARACTERISTICS

| | | | | |
|--|-----------|-----|-----|-----|
| Current–Gain — Bandwidth Product(3),(4) ($I_C = -50\text{mA dc}$, $V_{CE} = -20\text{V dc}$, $f = 100\text{MHz}$) | f_T | 200 | — | MHz |
| Output Capacitance ($V_{CB} = -10\text{V dc}$, $I_E = 0$, $f = 1.0\text{MHz}$) | C_{obo} | — | 8.0 | pF |
| Input Capacitance ($V_{EB} = -2.0\text{V dc}$, $I_C = 0$, $f = 1.0\text{MHz}$) | C_{ibo} | — | 30 | pF |

SWITCHING CHARACTERISTICS

| | | | | | |
|--|---|-----------------------------|-------------|-----------------|----|
| Turn–On Time Delay Time Rise Time | ($V_{CC} = -30\text{V dc}$, $I_C = -150\text{mA dc}$, $I_{B1} = -15\text{mA dc}$) | t_{on} t^d t_r | — — — | 45 10 40 | ns |
| Fall Time Storage Time Turn–Off Time | ($V_{CC} = -6.0\text{V dc}$, $I_C = -150\text{mA dc}$, $I_{B1} = I_{B2} = 15\text{mA dc}$) | t_f t_s t_{off} | — — — | 30 80 100 | ns |

3. Pulse Test: Pulse Width < 300 μs , Duty Cycle < 2.0%.

4. f_T is defined as the frequency at which $|h_{fe}|$ extrapolates to unity.

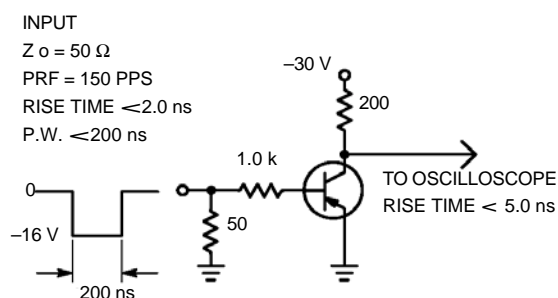


Figure 1. Delay and Rise Time Test Circuit

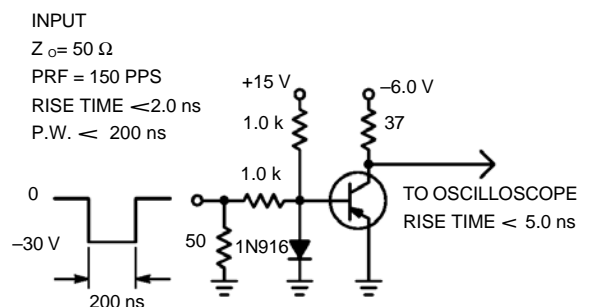


Figure 2. Storage and Fall Time Test Circuit

TYPICAL CHARACTERISTICS

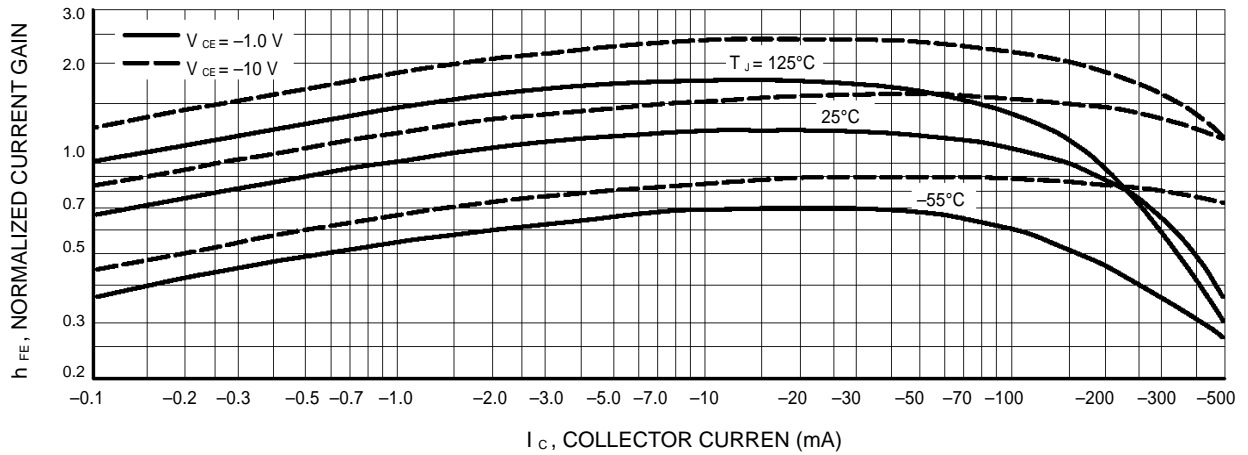


Figure 3. DC Current Gain

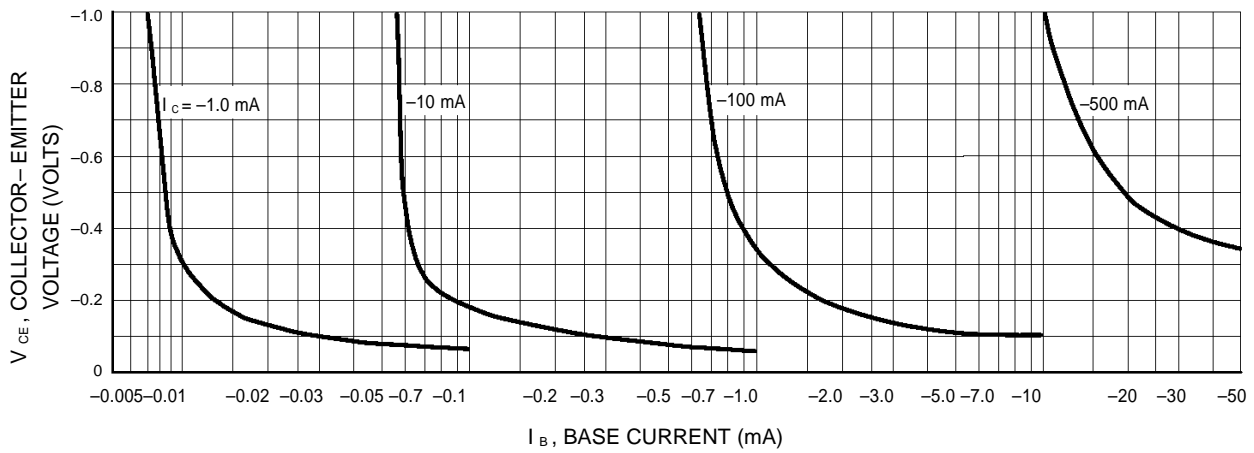


Figure 4. Collector Saturation Region

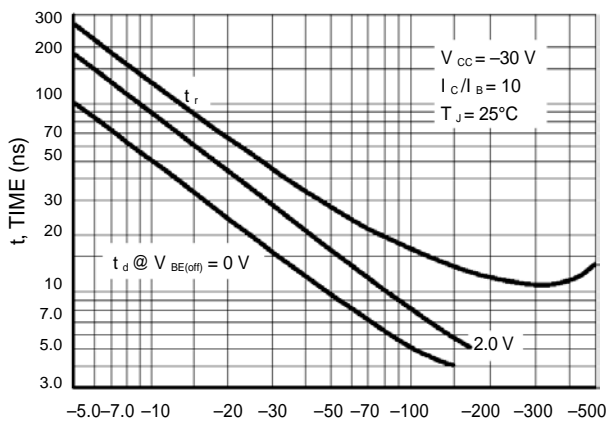


Figure 5. Turn-On Time

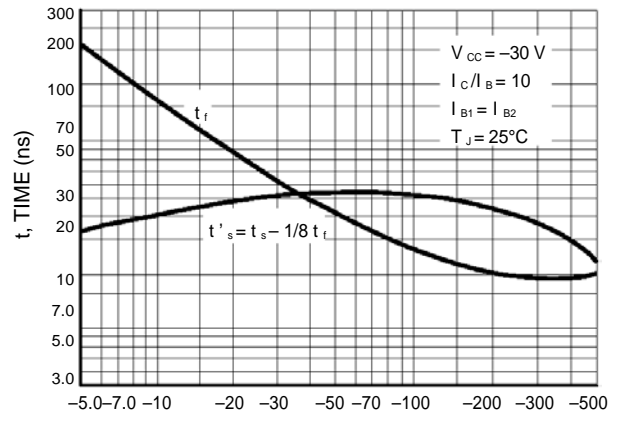


Figure 6. Turn-Off Time

LMBT2907ADW1T1G

TYPICAL SMALL-SIGNAL CHARACTERISTICS

NOISE FIGURE

$V_{CE} = 10 \text{ Vdc}$, $T_A = 25^\circ\text{C}$

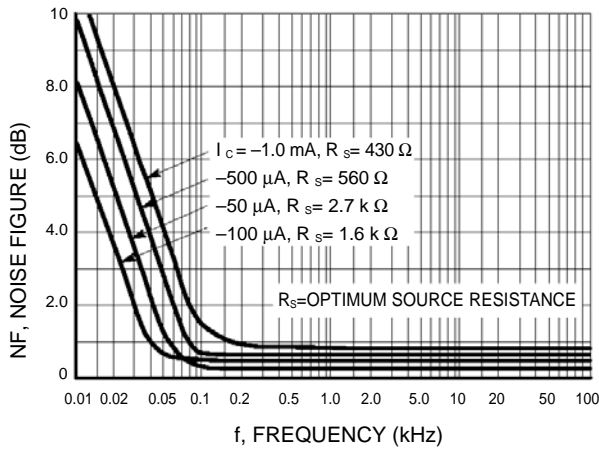


Figure 7. Frequency Effects

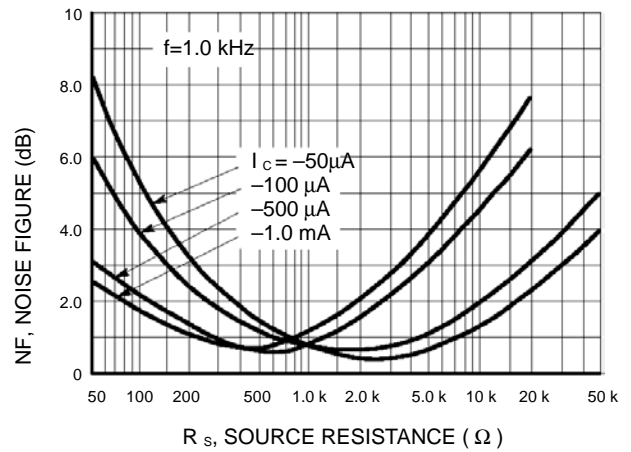


Figure 8. Source Resistance Effects

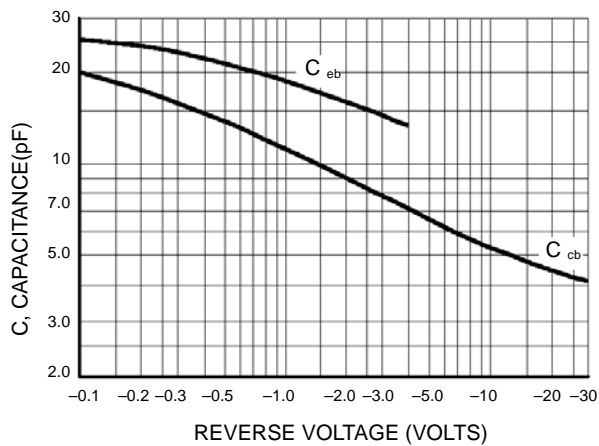


Figure 9. Capacitances

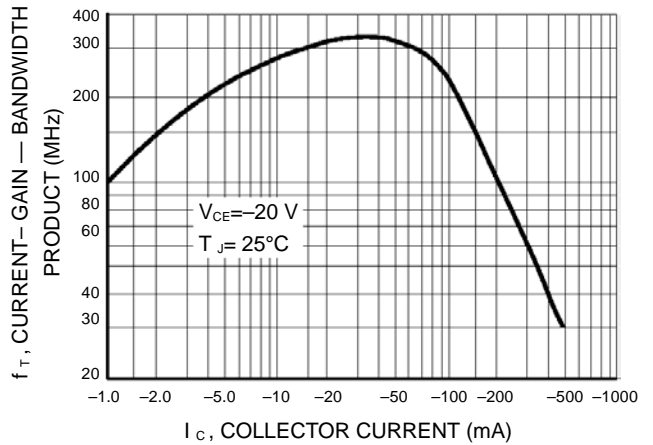


Figure 10. Current-Gain — Bandwidth Product

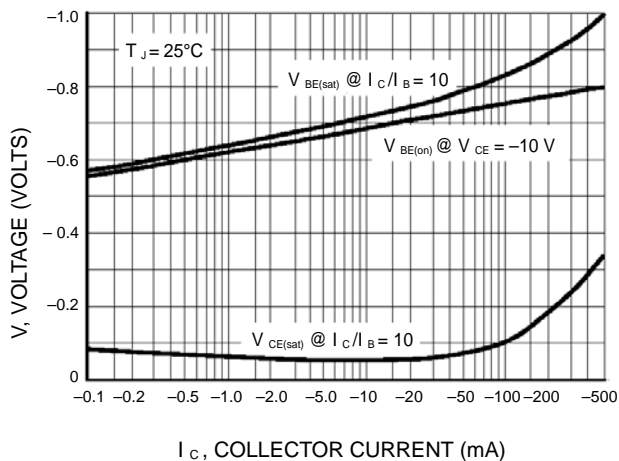


Figure 11. "On" Voltage


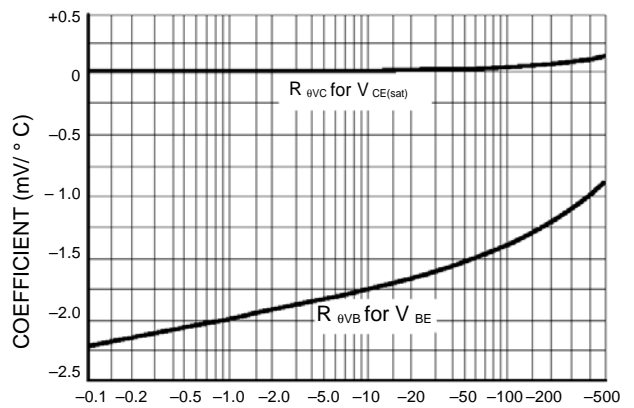


Figure 12. Temperature Coefficients

LMBT2907ADW1T1G

SC-88/SOT-363

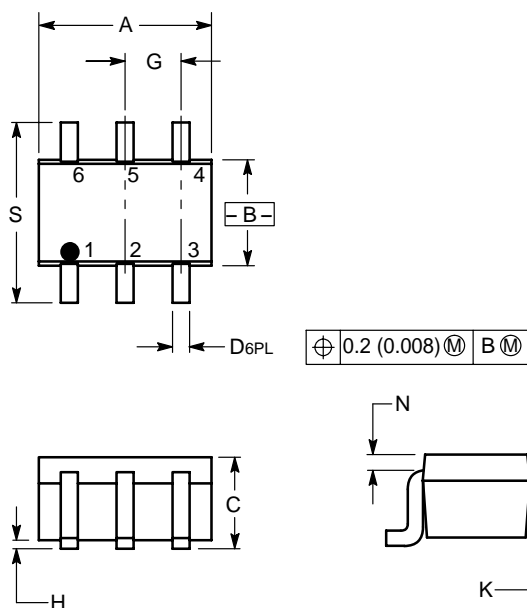

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

| DIM | INCHES | | MILLIMETERS | |
|-----|-----------|-------|-------------|------|
| | MIN | MAX | MIN | MAX |
| A | 0.071 | 0.087 | 1.80 | 2.20 |
| B | 0.045 | 0.053 | 1.15 | 1.35 |
| C | 0.031 | 0.043 | 0.80 | 1.10 |
| D | 0.004 | 0.012 | 0.10 | 0.30 |
| G | 0.026 BSC | | 0.65 BSC | |
| H | --- | 0.004 | --- | 0.10 |
| J | 0.004 | 0.010 | 0.10 | 0.25 |
| K | 0.004 | 0.012 | 0.10 | 0.30 |
| N | 0.008 REF | | 0.20 REF | |
| S | 0.079 | 0.087 | 2.00 | 2.20 |

- PIN 1. EMITTER 2
 2. BASE 2
 3. COLLECTOR 1
 4. EMITTER 1
 5. BASE 1
 6. COLLECTOR 2

