


LPP-150 Series Single Output Switching Power Supplies With PFC

FEATURES

Universal AC Input / full range
PFC 0.98@115V; 0.96@230V
Protections: Short circuit / OLP / OVP
100% full load burn-in test
Fixed switching frequency at 134KHz
Approvals: UL/CUL/TUV/CE/CB
3 years warranty



SPECIFICATIONS


Input voltage.....85-264VAC, 120-370VDC
 Inrush current.....cold start, 40A/230V
 O.L.P.105~150% constant current limiting, auto recovery
 O.V.P.110~135% rated output voltage
 Setup, rise, hold up time.....600ms, 30ms, 20ms at full load
 Withstand voltage.....I/P-O/P:3KV, I/P-FG:1.5KV, 1min.
 Operating temp.....-10~60°C (refer to output derating curve)
 Safety standard.....UL60950-1, TUV EN60950-1
 EMC standard.....EN55022 CLASS B, EN61000-3-2,3,
 EN61000-4-2,3,4,5,6,8,11; ENV50204
 Connection.....5+6Px2/3.96mm pitch, JST B5P/B6Px2-VH
 Packing.....0.62kgs; 24pcs/16.6kgs/1.39CUFT

MODEL LIST



Model No.	Output	Tolerance	R&N	Eff.
LPP-150-3.3	3.3VDC/30A	± 2%	100mV	66%
LPP-150-5	5VDC/30A	± 2%	100mV	72%
LPP-150-7.5	7.5VDC/20A	± 2%	100mV	76%
LPP-150-12	12VDC/12.5A	± 2%	100mV	79%
LPP-150-13.5	13.5VDC/11.2A	± 2%	100mV	80%
LPP-150-15	15VDC/10A	± 2%	100mV	80%
LPP-150-24	24VDC/6.3A	± 1%	150mV	83%
LPP-150-27	27VDC/5.6A	± 1%	150mV	83%
LPP-150-48	48VDC/3.2A	± 1%	250mV	83%

Mechanical Drawing: mm(Inch)

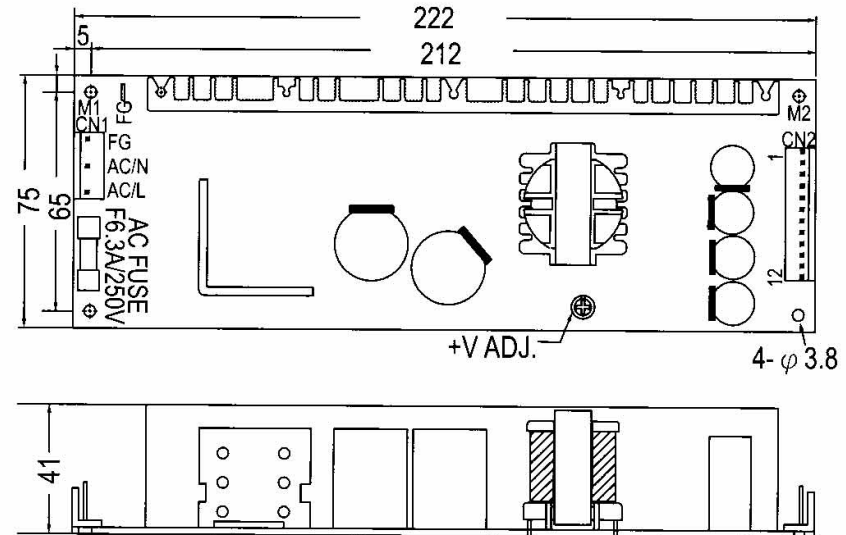


Tumbler Technologies + TRUMPower

California, USA • 650-988-6616 • sales@TRUMPower.com • www.TRUMPower.com

Mechanical Specification

Unit:mm

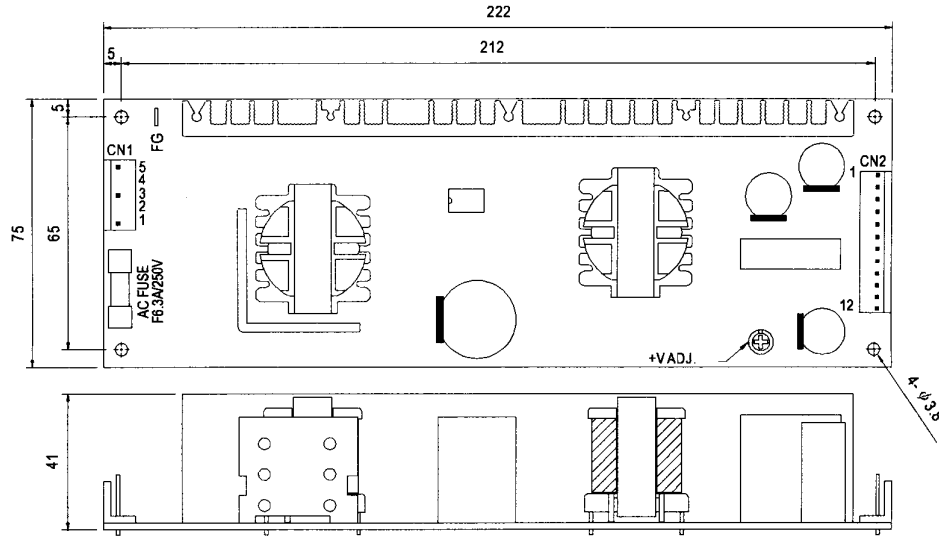


AC Input Connector (CN1) : JST B5P-VH or equivalent

Pin No.	Assignment	Mating Housing	Terminal
1	AC/L	JST VHR or equivalent	JST SVH-21T-P1.1 or equivalent
2,4	No Pin		
3	AC/N		
5	FG		

DC Output Connector (CN2) : JST B6P-VH*2 or equivalent

Pin No.	Assignment	Mating Housing	Terminal
1-6	-V	JST VHR or equivalent	JST SVH-21T-P1.1 or equivalent
7-12	+V		

Block Diagram

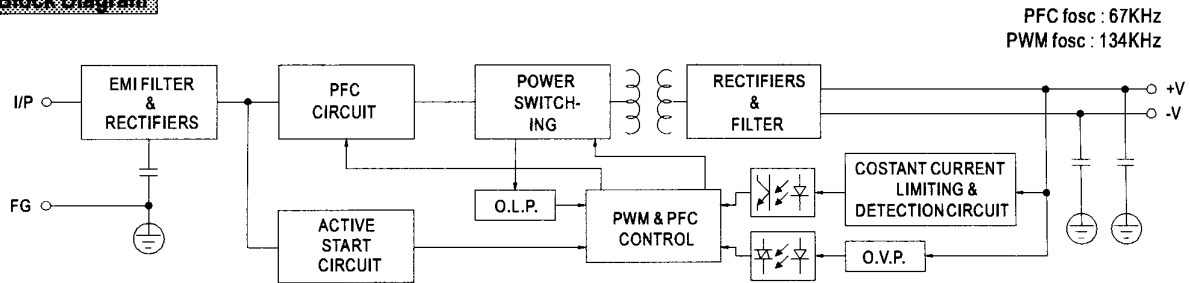

Derating Curve

Output Derating VS Input Voltage

