



1. CONFIGURATION & DIMENSIONS :

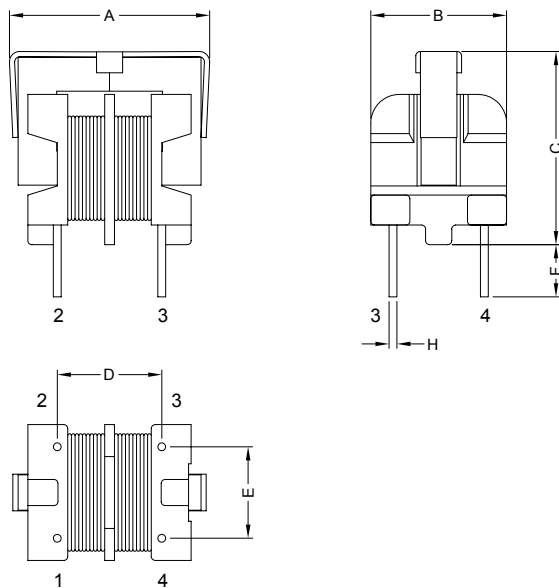

Unit:m/m

A	B	C	D	E	F	H
16.00 Max.	11.00 Max.	16.00 Max.	8.00±0.30	7.00±0.30	4.00±0.50	Ø0.60 Ref.

2. SCHEMATIC :

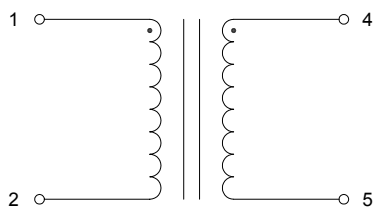

3. SCHEMATIC :

- a) Bobbin : Phenolic
- b) Core : UU9.8
- c) Wire : Polyurethane DD (1UEW)
- d) Varnish : Synthite
- e) Clip : UU9.8



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

03.06.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

4. GENERAL SPECIFICATION :

- a) Operating Temperature Range : -10°C to +85°C
- b) Insulation Class : A (105°C)

5. ELECTRICAL CHARACTERISTICS :

Part No.	Inductance (L)	Conditions	Test Frequency	DCR @ 25°C
SUUA9VTF-50092	L : (1-2) = 30mH Min.	-	1KHz 10mA	(1-2) = 3.0Ω Max.
				(4-3) = 3.0Ω Max.



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

03.06.2008



SUPERWORLD ELECTRONICS (S) PTE LTD