HSB20A-8

Dimension

Unit: mm
Tolerance : 0.3mm



Frequency Response

Normalized to 1W Input Power and
1m Measuring Distance

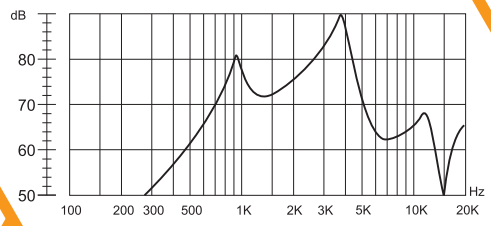

Specification (all data taken at 25˚C unless otherwise specified)

Coil Impedance (Ω)	Rated Power (W)	Maximum Input Power (W)	Resonance Frequency (Hz)	★Frequency Range (Hz)	★Sound Output at 1kHz(dB)	Operating Temp. (ºC)	Storage Temp. (ºC)
8 ± 15%	0.1	0.2	1000 ± 20%	1000 ~ 3500	72 ± 3	-10 ~ +40	-10 ~ +40

HSVB20A-8

The specifications are only for 8Ω version. Specification for other impedance is available upon request.
★ Value normalized to 1W input power and 1m measuring distance.

HSB23A-8

Dimension

Unit: mm
Tolerance : 0.3mm



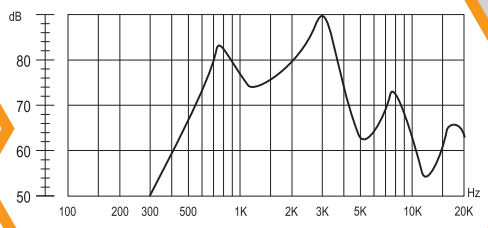

Frequency Response

Normalized to 1W Input Power and
1m Measuring Distance

Specification (all data taken at 25˚C unless otherwise specified)

Coil Impedance (Ω)	Rated Power (W)	Maximum Input Power (W)	Resonance Frequency (Hz)	★Frequency Range (Hz)	★Sound Output at 1kHz(dB)	Operating Temp. (ºC)	Storage Temp. (ºC)
8 ± 15%	0.1	0.2	750 = 20%	750 ~ 3200	75 ± 3	-10 ~ +40	-10 ~ +40

HSB23A-8

The specifications are only for 8Ω version. Specification for other impedance is available upon request.
★ Value normalized to 1W input power and 1m measuring distance

HSB27F-8

Dimension

Unit: mm
Tolerance : 0.3mm



Frequency Response

Normalized to 1W Input Power and
1m Measuring Distance

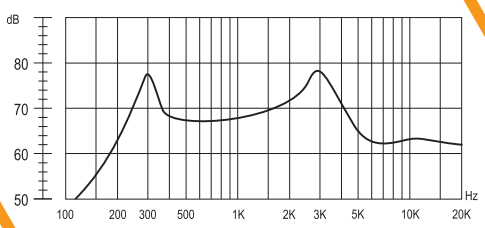

Specification (all data taken at 25˚C unless otherwise specified)

Coil Impedance (Ω)	Rated Power (W)	Maximum Input Power (W)	Resonance Frequency (Hz)	★Frequency Range (Hz)	★Sound Output at 1kHz(dB)	Operating Temp. (ºC)	Storage Temp. (ºC)
8 ± 15%	0.15	0.2	300 = 20%	300 ~ 3000	68 ± 3	-10 ~ +40	-10 ~ +40

HSB27F-8

The specifications are only for 8Ω version. Specification for other impedance is available upon request.
★ Value normalized to 1W input power and 1m measuring distance