

Silicon NPN Power Transistors 2N5490 2N5492 2N5494 2N5496

DESCRIPTION

- With TO-220 package
- High power dissipation

APPLICATIONS

- For used in medium power and amplifier applications

PINNING

PIN	DESCRIPTION
1	Base
2	Collector;connected to mounting base
3	Emitter

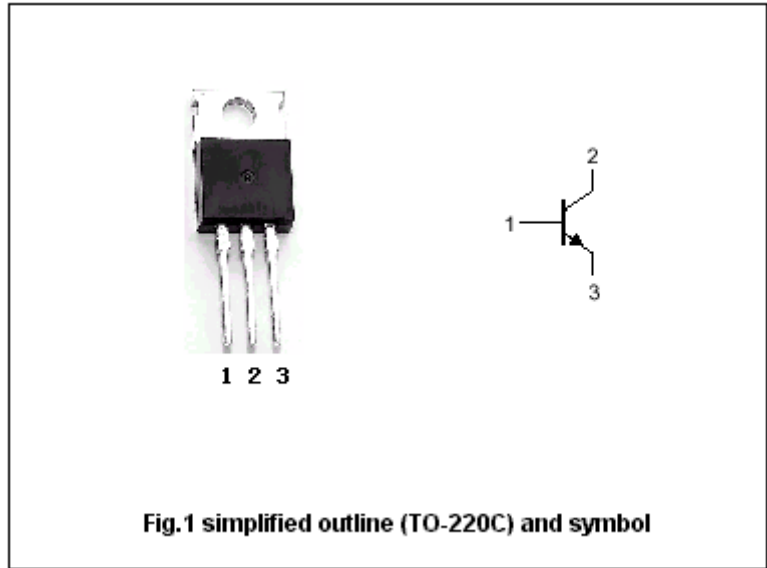


Fig.1 simplified outline (TO-220C) and symbol

Absolute maximum ratings(Ta=25)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V _{CB0}	Collector-base voltage	2N5490/5494	60	V
		2N5492	75	
		2N5496	90	
V _{CEO}	Collector-emitter voltage	2N5490/5494	40	V
		2N5492	55	
		2N5496	70	
V _{EBO}	Emitter-base voltage	Open collector	5	V
I _C	Collector current		7	A
I _B	Base current		3	A
P _T	Total power dissipation	T _C =25	50	W
T _j	Junction temperature		150	
T _{stg}	Storage temperature		-65~150	

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
R _{th-j-c}	Thermal resistance from junction to case	2.5	/W

Silicon NPN Power Transistors 2N5490 2N5492 2N5494 2N5496

CHARACTERISTICST_j=25 unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{CEO(SUS)}	Collector-emitter sustioning voltage	2N5490/5494	I _C =0.1A ; I _B =0			V
		2N5492				
		2N5496				
V _{CEsat}	Collector-emitter saturation voltage	2N5490	I _C =2.0A ; I _B =0.2A		1.0	V
		2N5492	I _C =2.5A ; I _B =0.25A			
		2N5494	I _C =3.0A ; I _B =0.3A			
		2N5496	I _C =3.5A ; I _B =0.35A			
V _{BE}	Base-emitter on voltage	2N5490	I _C =2.0A ; V _{CE} =4V		1.1	V
		2N5492	I _C =2.5A ; V _{CE} =4V			
		2N5494	I _C =3.0A ; V _{CE} =4V			
		2N5496	I _C =3.5A ; V _{CE} =4V			
I _{CEV}	Collector cut-off current	2N5492	V _{CE} =70V ; V _{BE} =1.5V		1.0	mA
		2N5490/5494	V _{CE} =55V ; V _{BE} =1.5V			
		2N5496	V _{CE} =85V ; V _{BE} =1.5V			
I _{CER}	Collector cut-off current	V _{CE} =Rated V _{CEO} ; R _{BE} =100			0.5	mA
I _{EBO}	Emitter cut-off current	V _{EB} =5V ; I _C =0			1.0	mA
h _{FE}	DC current gain	2N5490	I _C =2.0A ; V _{CE} =4V	20	100	
		2N5492	I _C =2.5A ; V _{CE} =4V			
		2N5494	I _C =3.0A ; V _{CE} =4V			
		2N5496	I _C =3.5A ; V _{CE} =4V			
f _T	Transition frequency	I _C =0.5A ; V _{CE} =4V	0.8			MHz

Silicon NPN Power Transistors 2N5490 2N5492 2N5494 2N5496

PACKAGE OUTLINE

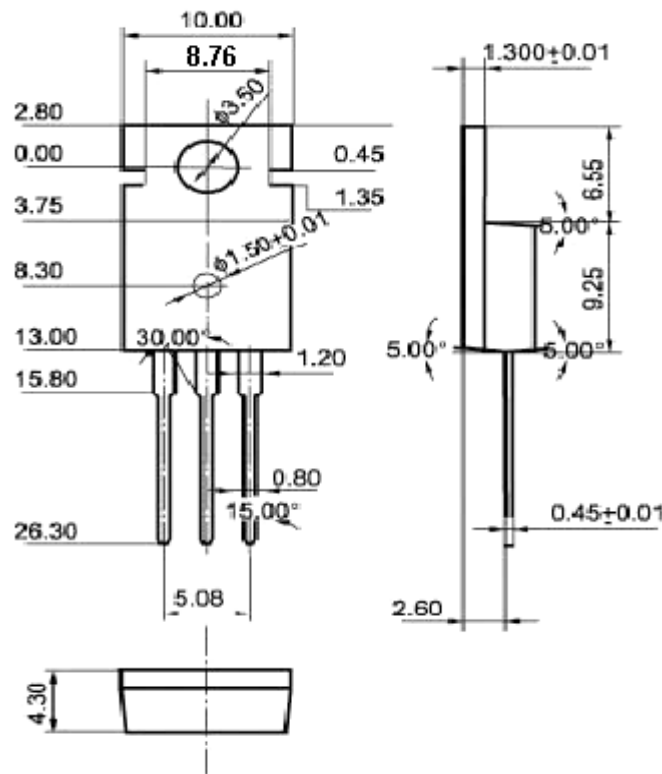


Fig.2 Outline dimensions(unindicated tolerance: ± 0.10 mm)