



1. Dimensions:

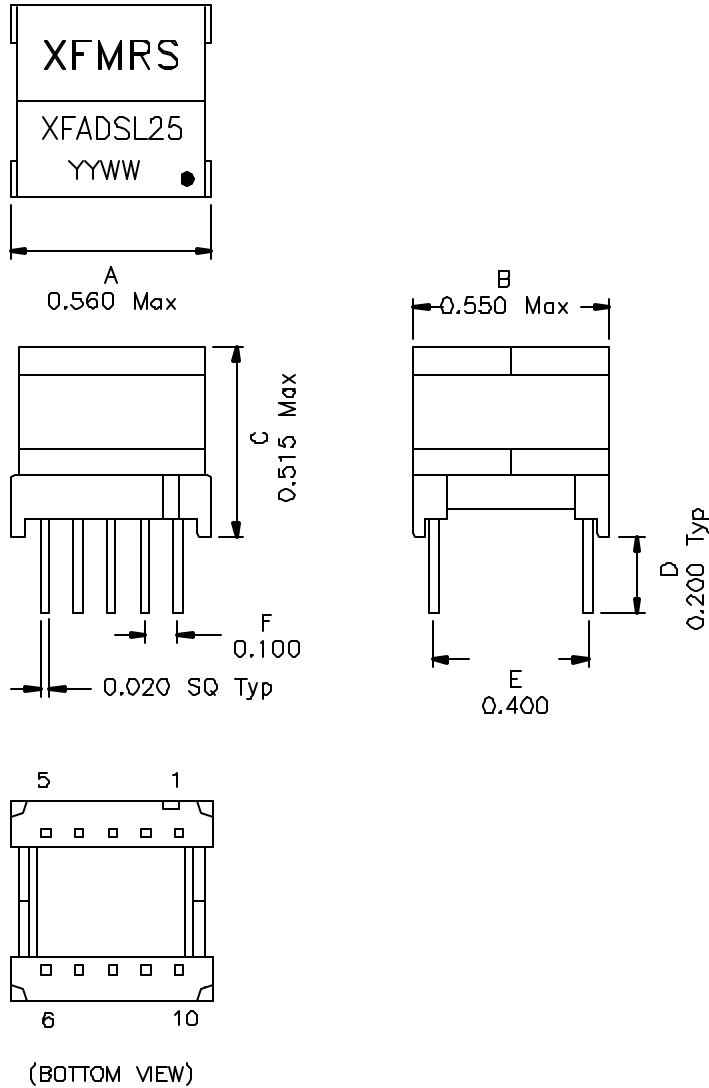

2.Schematic:

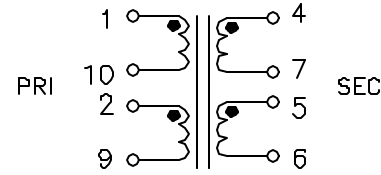

3.Electrical Specifications: @25°C

Turns Ratio: Pri:Sec 1CS:1CS±1%
 OCL: P1-9 25.5mH Min @10KHz 0.1V tie P10-2
 CW/W: P1-4 5pF Typical (tie P10-2,P7-5)
 Pri DC Res.: 2.52 Ohms max tie P10-2
 Sec DC Res.: 2.20 Ohms max tie P7-5
 Frequency Response: ±0.6dB 1KHz-1MHz, 50KHz ref.
 Insertion Loss: 0.2dB Typ @50KHz
 Longitudinal Balance: 52dB Min.@1KHz-500KHz
 HIPOT: 1500VAC Pri-Sec

Note:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0,
3. ASTM oxygen index: > 28% ,
4. Temperature rating: 155°C. UL file E151556,
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Designed to meet UL1459 requirements

XFMR5 Inc UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH	Title: TRANSFORMER	
	P/N: XFADSL25	REV. B
	DWN. 廖玉坤	Nov-21-00
	CHK. 李清儿	Nov-21-00
SHEET 1 OF 1	APP. Joe Huff	Nov-21-00

DOC. REV B/2