



TERMINAL BLOCKS

- 7.5mm Pitch
- Flame Retardant Material
- 2.5mm² wire acceptance
- UL/ CSA approved
- Interlocking
- Screw Terminal

7.5mm PITCH 90° MOUNT




SPECIFICATION

Rating: 17.5A/750V
Dielectric Strength: ≥3KV/60sec
Insulation Resistance: ≥5MΩ
Working temperature: -20°C to 125°C
Short Period: 160°
Moulding: UL94V-0 flame retardant Lexan

Pin/terminal: 5μ tinned, nickel plated brass
Wire protector: Nickel plated brass
Screw/torque: M3 steel, 6μ zinc colour passivated and tropicalised/0.5Nm
Recommended PCB hole size: ø1.1mm

OUTLINE DRAWING

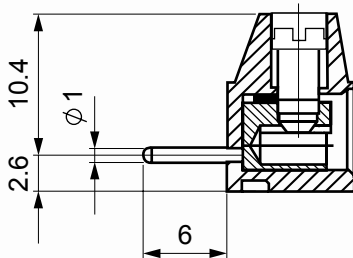

ORDERING INFORMATION

DBC	TB	87	/2
Dubilier Connectors	Series Terminal Block	Style	N° of Ways 2 = 2 ways 3 = 3 ways

* Other Number of ways are available up to 12
Please consult office for further details

TERMINAL BLOCKS

- 7.5mm Pitch
- Screw Terminal
- 2 - 12 pole interlocking
- 2.5mm² wire acceptance
- UL/CE approved

7.5MM PITCH SCREW TERMINAL




SPECIFICATION

Electrical Characteristics

Rating Current: 17.5A/750V
Dielectric strength ≥ 3kV/60sec
Insulation resistance ≥ 5MΩ
Operating Temperature: -20°C to +125°C
Short period: 160°C
Moulding: UL94-V0 flame retardant Lexan

Pin/terminal: 5μ tinned, nickel plated brass
Wire protector: Nickel plated brass
Screw/torque: M3 steel. 6μ zinc colour passivated and tropicalised/0.5Nm
Recommended PCB hole size: ø1.1mm

OUTLINE DRAWING

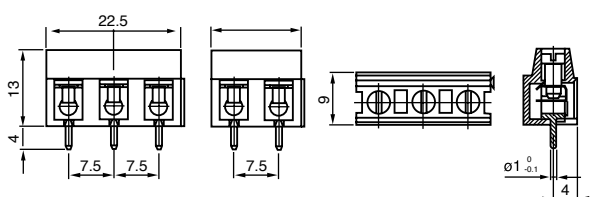

ORDERING INFORMATION

DBC	TB	24	/2
Dubilier Connectors	Series Terminal Blocks	Style	No of Ways 2 = 2ways 3 = 3ways

* other number of ways are available
Please consult the office for further details