






RoHS Compliant
2002/95/EC
HSF

Level-1 Controlled Substances are banned

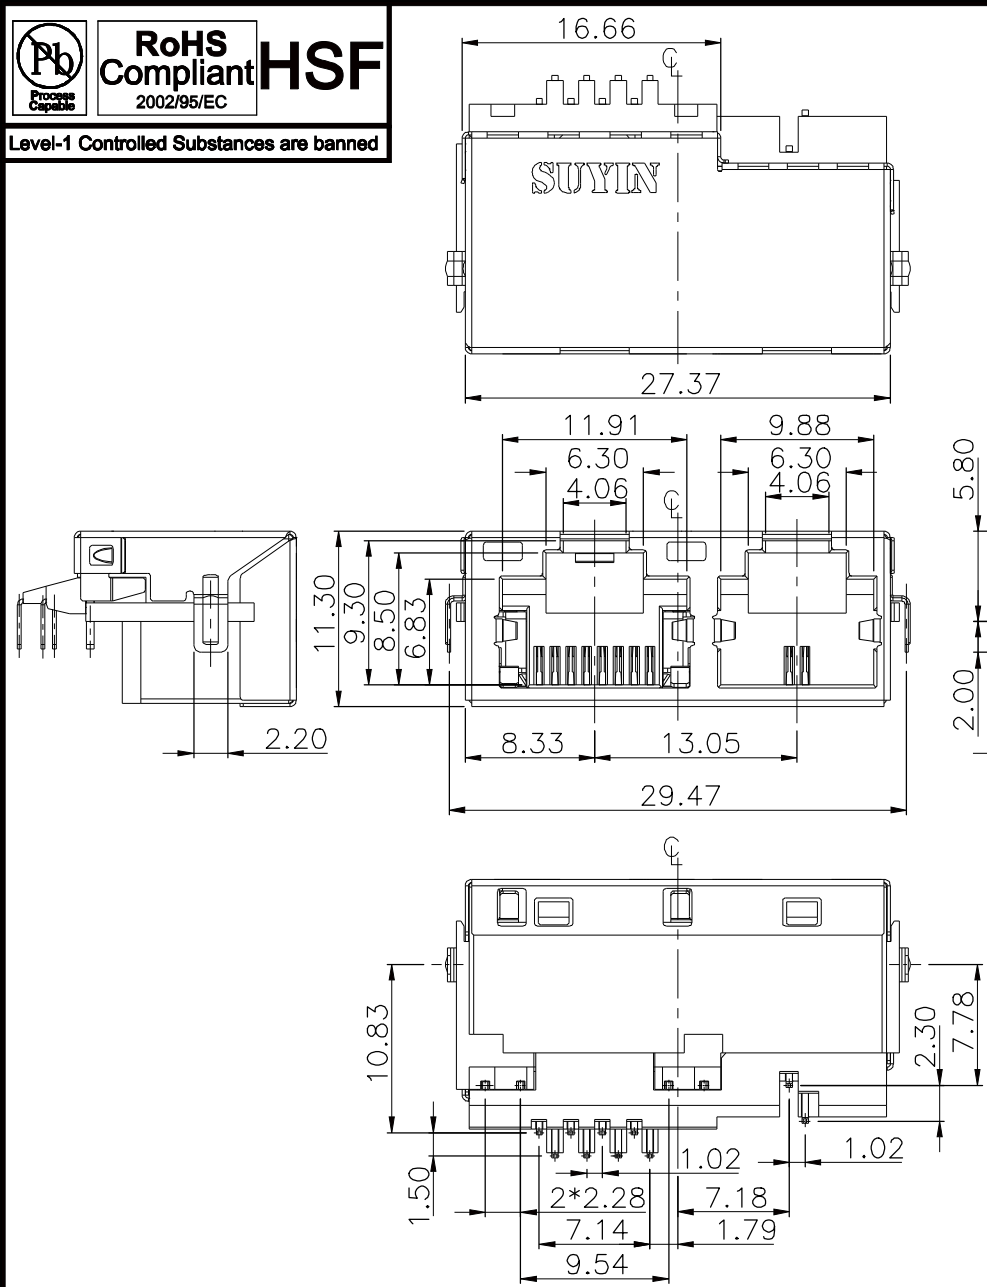

RECOMMENDED P.C.B LAYOUT (COMPONENT SIDE)
P.C.B THICKNESS=1.20mm(TOLERANCE=±0.05)
WITHOUT LOCKING FUNCTION

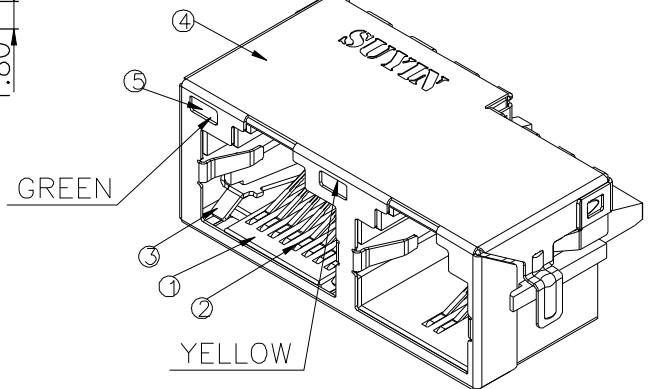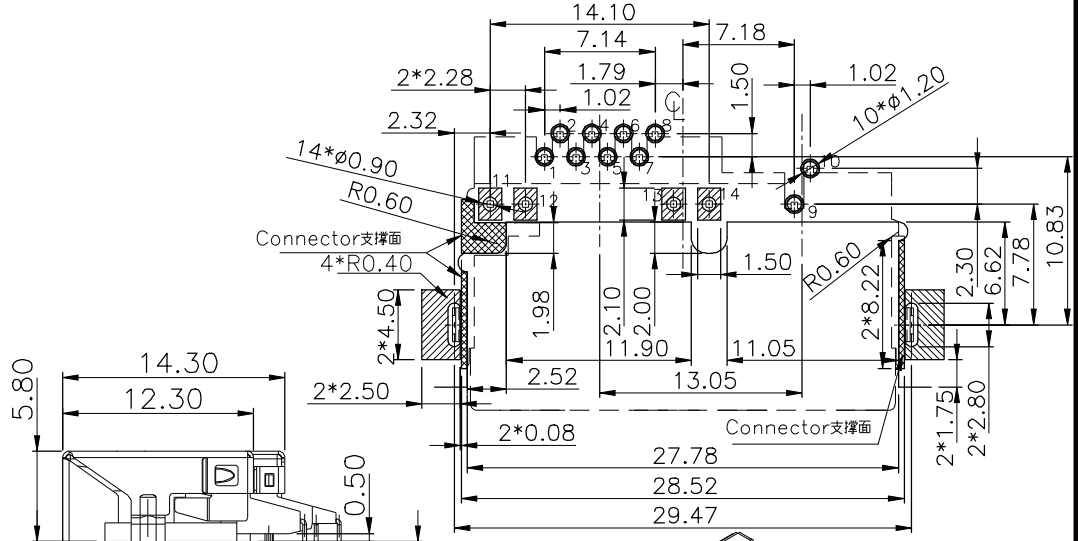

NOTE:
1.ELECTRIC CHARACTERISTIC OF LED:
VOLTAGE MAXIMIZE DURABILITY DC 2.2V
CURRENT MAXIMIZE DURABILITY 10mA
2.LED LAYOUT:
11(+) 12(-) GREEN
13(+) 14(-) YELLOW

NO.	DESCRIPTION	MATERIAL	COLOR	REMARK
5	LED	EPOXY		
4	SHELL	METAL		NICKEL PLATED
3	FORK	METAL		
2	TERMINAL	COPPER ALLOY		GOLD PLATED OVER Ni.
1	HOUSING	HIGH TEMP.PLASTIC	BLACK	UL 94V-0

SUYIN
CONNECTOR

ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED	APPRO.	DATE
						Angle ±2° 30 ~ ±0.50 10 ~ 30 ±0.30 ~ 10 ±0.15	DRAW DESIGN CHECK APPRO.	曾智 曾智 羅志兵 鄭家奇
DCB-070801-08	PC	08'/03/11	REW RELEASE	曾智	鄭家奇			08'/03/11
		07'/08/15	PC1:因產品打MARK不平影響吸件,現變更MARK位置.	朱振威	鄭家奇			08'/03/11
								08'/03/11

CUSTOMER COPY	TITLE: RJ JACK CONNECTOR			
PART NO.	100038FR014S502ZL			
PRODUCT SPEC.	100038FR014XX02XX			
FILE NAME.	DING	100038FR014S502ZL-C		
SCALE	2:1	UNIT:mm	A4	SHEET: 1 of 2