




Approvals




Life expectancy

L-10 LIFE AT 40°C:
80 000 hours

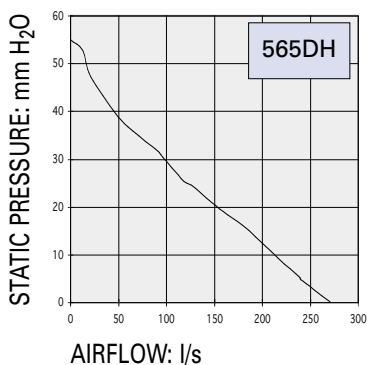

ø 220 x 71 mm

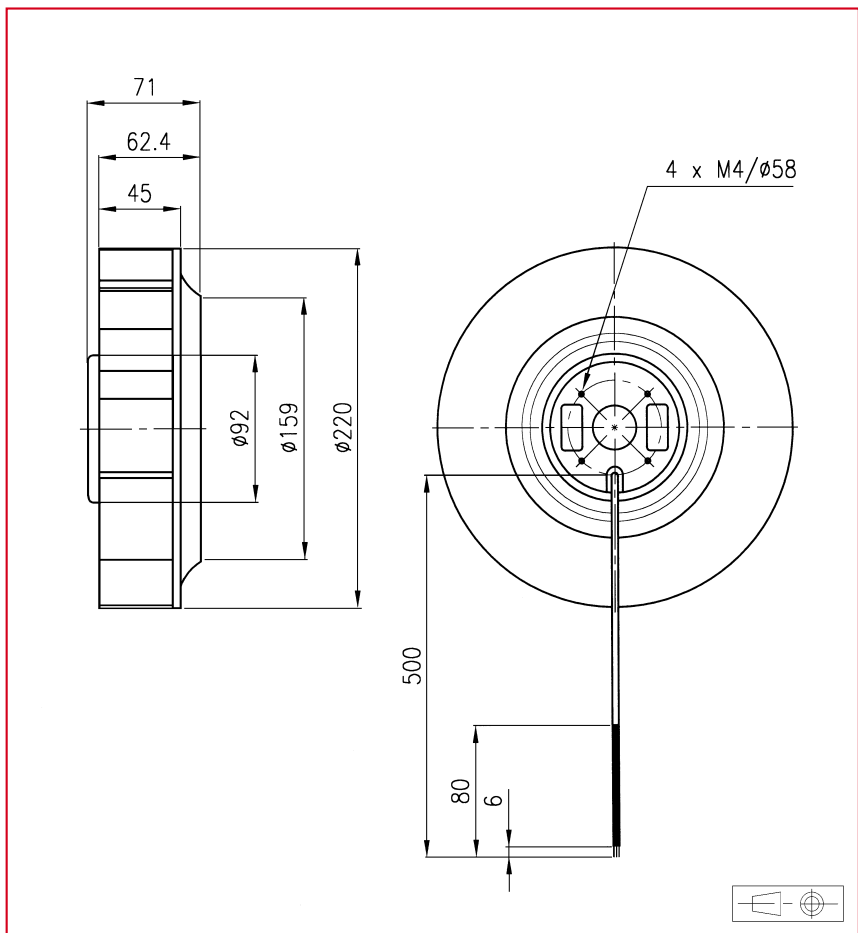

Brushless DC Motor

Wheel material: plastic UL 94 VO
Weight: 1,50 kg
Design code: C13 - Tropicalized
IP 44

Speed sensor
Variable speed (0 - 10 V input / PWM)

Available with:
- steel wheel (consult factory)

| Part number | Nominal voltage | Airflow | Noise level | Nominal speed | Input power | Voltage range | Bearing system | | Connection type | | Operating temperature | |
|---------------|-----------------|---------|-------------|---------------|-------------|---------------|----------------|--------|-----------------|-----------|-----------------------|---------|
| | V | l/s | dB(A) | RPM | W | V | Ball | Sleeve | Leads | Terminals | Min. °C | Max. °C |
| 565DH4LM19000 | 48 | 271,0 | 71 | 2950 | 94,5 | (36-60) | X | | X | | - 20 | 70 |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |

Additional versions:
Salt spray protection - high temperature range - IP 54 - alarm as options
Other voltages: consult factory

Accessories:
Consult factory