

Features





- Frequency Range: 1200~1500MHz
- Low Noise: 1.1dB(Typical)
- Standard Hermetic Package
- Operating Temperature Range: -55°C ~ +85°C

Specifications (50 Ω, V_{CC} = +5V, T_A = -55°C ~ +85°C)

Parameter	Symbol	Unit	Guaranteed	Typical
Frequency Range	f _L ~f _H	MHz	1200~1500	--
Gain	G _p	dB	≥23.0	29.0
Gain Flatness	ΔG _p	dB	--	±0.5
Noise Figure	F _n	dB	≤1.35 Δ	1.2
Input VSWR	VSWR _i	--	≤2.0:1	1.5:1
Output VSWR	VSWR _o	--	≤2.0:1	1.5:1
Output Power @ 1dB Compression	P-1	dBm	≥11.0 * Δ	12.0
DC Current	I _{CC}	mA	--	60



“*”f = 1400MHz; “Δ” T_A = 24 ± 1°C;

Typical Curves

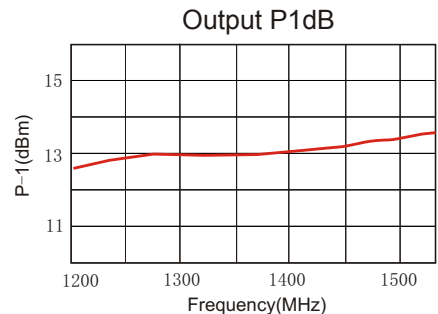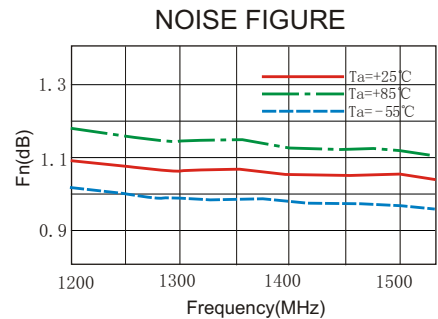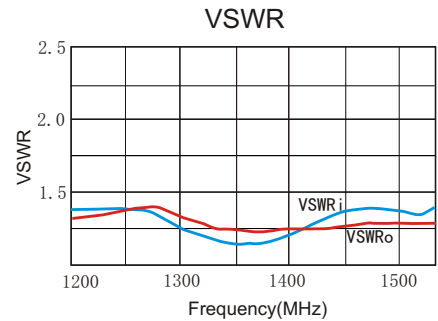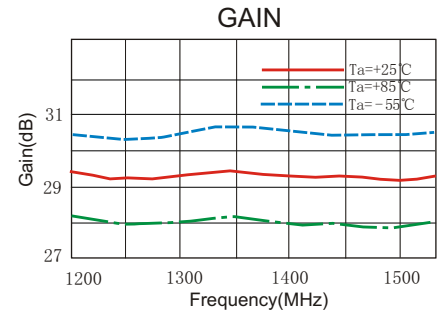

Maximum Rating

- DC Voltage : +6VDC
- RF Input: +10dBm
- Storage Temp: +125°C



Application Notes

1. Typical application shown as right, C₁ = 10~33 μF ; C₂ = 3300~6800pF;
2. See assembly section for mounting information
3. Connectorized package(SMA-1)available
4. ESD observe handing precautions

