

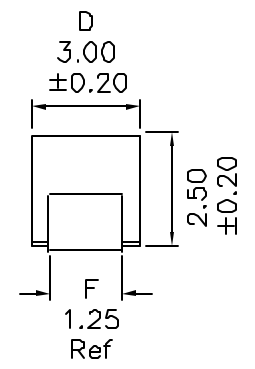
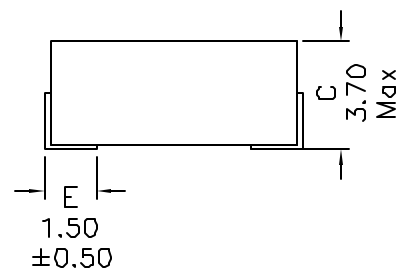


1. Dimensions:



2. Schematic:



3. Electrical Specs:

Impedance: $60 \text{ Ohms} \pm 20\%$ @25MHz
 Impedance: $90 \pm 20\%$ Ohms @100MHz
 DC Res.: 0.90 mOhms Max

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: $> 28\%$
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to $+85^\circ\text{C}$
6. Storage Temperature Range: -55°C to $+125^\circ\text{C}$
7. Aqueous wash compatible
8. SMD Lead Coplanarity: $\pm 0.004'' (0.102\text{mm})$
9. Electrical and mechanical specifications 100% tested
10. RoHS Compliant Component

DOC. REV: A/4

XFMRs Inc www.XFMRs.com		Title: SURFACE MOUNT BEADS	
UNLESS OTHERWISE SPECIFIED TOLERANCES: N/A Dimensions in MM	P/N: XFBPH-C8-853025		REV A
	DWN.	Xianyi	Aug-22-08
	CHK.	YK Liao	Aug-22-08
SHT 1 OF 1	APP.	Joe Huff	Aug-22-08