




TERMINAL BLOCKS

7.5mm PITCH PLUG IN

- 2-12 pole solid block
- Closed and open headers
- Horizontal female plug style
- Professional rising clamp
- Moulded in green UL94-V0 flame retardant PA66
- 2.5mm² cable entry
- UL, CE approved

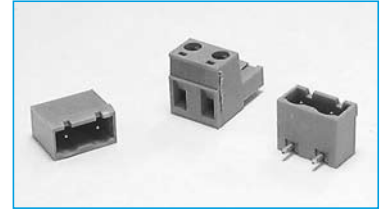


SPECIFICATION

Electrical Characteristics

Rating Current: 12A/750V
Dielectric Voltage: ≥ 3kVac/60sec
Insulation resistance: ≥ 5MΩ
Operating Temperature: -20°C to +125°C
Short Period: 160°C

Moulding: UL94-V0 flame retardant PA66
Pin/terminal: 5μ tinned phosphor bronze
Rising clamp: 5μ nickel copper flash brass
Screw/torque: M3 steel, 6μ zinc, colour passivated and tropicalised/0.5Nm
Recommended PCB hole size: ø1.4mm

OUTLINE DRAWING

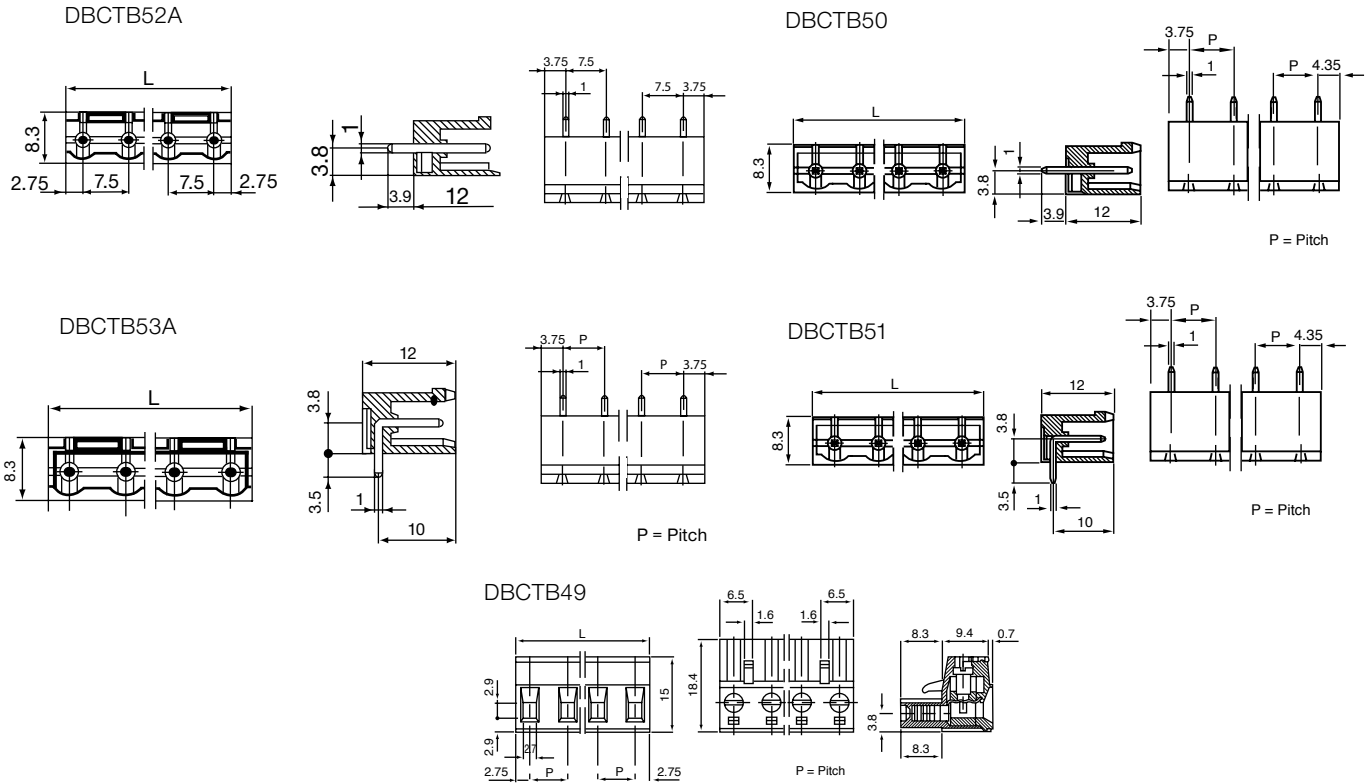

ORDERING INFORMATION

DBC	TB	49	/2
Dubilier Connectors	Series Terminal Blocks	Style	No of Ways
		49 = Female	2 = 2ways
		50 = Closed End Str	3 = 3ways
		51 = Closed End R/A	etc.
		52A = Open End Str	* Other Number of ways are available up to 12
		53A = Open End R/A	Please consult office for further details