



CHENMKO ENTERPRISE CO.,LTD

SURFACE MOUNT

P-Channel Enhancement Mode Field Effect Transistor

VOLTAGE 60 Volts CURRENT 3.7 Ampere

CHM9407AZPT

Lead free devices

APPLICATION

- * Servo motor control.
- * Power MOSFET gate drivers.
- * Other switching applications.



FEATURE

- * Small flat package. (SC-73/SOT-223)
- * High density cell design for extremely low R_{DS(ON)}.
- * Rugged and reliable.


CONSTRUCTION

- * P-Channel Enhancement

CIRCUIT

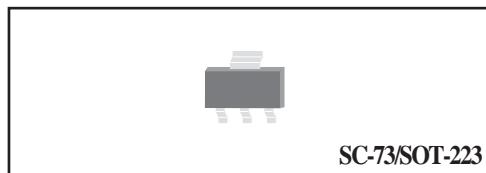

SC-73/SOT-223

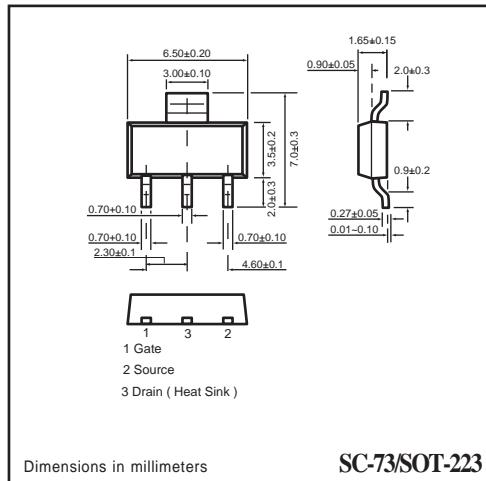

Dimensions in millimeters

SC-73/SOT-223

Absolute Maximum Ratings

T_A = 25°C unless otherwise noted

Symbol	Parameter	CHM9407AZPT	Units
V _{DSS}	Drain-Source Voltage	-60	V
V _{GSS}	Gate-Source Voltage	±20	V
I _D	Maximum Drain Current - Continuous	-3.7	A
	- Pulsed (Note 3)	-15	
P _D	Maximum Power Dissipation	3000	mW
T _J	Operating Temperature Range	-55 to 150	°C
T _{STG}	Storage Temperature Range	-55 to 150	°C

Note : 1. Surface Mounted on FR4 Board , t <=10sec

2. Pulse Test , Pulse width <= 300us , Duty Cycle <= 2%

3. Repetitive Rating , Pulse width limited by maximum junction temperature

4. Guaranteed by design , not subject to production testing

Thermal characteristics

R _{θJA}	Thermal Resistance, Junction-to-Ambient (Note 1)	42	°C/W
		2005-02	

RATING CHARACTERISTIC CURVES (CHM9407AZPT)

Electrical Characteristics $T_A = 25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Conditions	Min	Typ	Max	Units
--------	-----------	------------	-----	-----	-----	-------

OFF CHARACTERISTICS

BV_{DSS}	Drain-Source Breakdown Voltage	$V_{\text{GS}} = 0 \text{ V}, I_D = -250 \mu\text{A}$	-60			V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{\text{DS}} = -48 \text{ V}, V_{\text{GS}} = 0 \text{ V}$			-1	μA
I_{GSSF}	Gate-Body Leakage	$V_{\text{GS}} = 20\text{V}, V_{\text{DS}} = 0 \text{ V}$			+100	nA
I_{GSSR}	Gate-Body Leakage	$V_{\text{GS}} = -20\text{V}, V_{\text{DS}} = 0 \text{ V}$			-100	nA

ON CHARACTERISTICS (Note 2)

$V_{\text{GS(th)}}$	Gate Threshold Voltage	$V_{\text{DS}} = V_{\text{GS}}, I_D = -250 \mu\text{A}$	-1		-3	V
$R_{\text{DS(ON)}}$	Static Drain-Source On-Resistance	$V_{\text{GS}}=-10\text{V}, I_D=-3.7\text{A}$		98	118	$\text{m}\Omega$
		$V_{\text{GS}}=-4.5\text{V}, I_D=-3.1\text{A}$		120	150	
g_{FS}	Forward Transconductance	$V_{\text{DS}} = -5\text{V}, I_D = -3.7\text{A}$		7		S

SWITCHING CHARACTERISTICS (Note 4)

Q_g	Total Gate Charge	$V_{\text{DS}}=-30\text{V}, I_D=-3.7\text{A}$ $V_{\text{GS}}=-10\text{V}$		21	29	nC
Q_{gs}	Gate-Source Charge			3		
Q_{gd}	Gate-Drain Charge			4		
t_{on}	Turn-On Time	$V_{\text{DD}}= -30\text{V}$ $I_D = -1.0\text{A}, V_{\text{GS}}= -10 \text{ V}$ $R_{\text{GEN}}= 6\Omega$		13	45	nS
t_r	Rise Time			9	30	
t_{off}	Turn-Off Time			48	150	
t_f	Fall Time			22	75	

DRAIN-SOURCE DIODE CHARACTERISTICS AND MAXIMUM RATINGS

I_s	Drain-Source Diode Forward Current	(Note 1)			-1.3	A
V_{SD}	Drain-Source Diode Forward Voltage	$I_s = -1.3\text{A}, V_{\text{GS}} = 0 \text{ V}$ (Note 2)			-1.2	V