


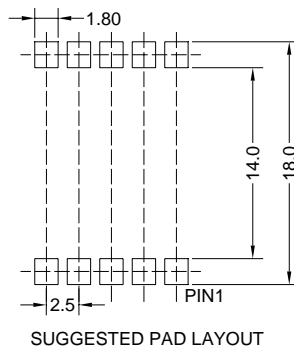


Broadband Access Transformer


- Designed to meet UL 60950 and EN 60950 requirements for supplementary insulation and 250V working voltage
- RoHS Compliant
- Excellent THD performance
- Operating Temperature -40°C to 85°C

Electrical Specifications @25°C		
OCL:	PIN 1-5= 100uH ±5% @ 10KHz/0.1V/Ser.	
Leakage Inductance:	PIN 1-5= 4.5uH ±1.0 @ 300KHz/0.1V	
T.H.D	PIN 1-5 to PIN 10-6 = -80dB Max. @ 30KHz/3.162V	
D.C.R:	PIN 1-4 = 420 mohm ±15%	PIN 2-5 = 420 mohm ±15%
	PIN 9-6 = 245 mohm ±15%	PIN 10-7 = 185 mohm ±15%
Hi-POT :	PRI. – SEC. =1875VAC/60Hz/2Seconds/1mA	
Turn Ratio:	PIN1-5 : PIN 10-6 = 2±2% :1	

Dimensions (Units: mm)



Schematic

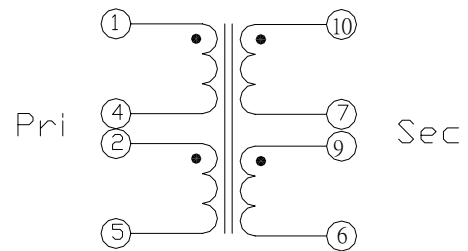

Mark

- 1.LAL ****----LAL0286
2. X----PRODUCT LINE
3. DATE CODE----YYWW
4. G----RoHS