

# 10 Base-T Multiport Module for CS8904 Dual PHY


## EPE6265S

- Cost competitive solution for 2 port 10 Base-T switches •
- Also recommended for TI Dual PHY and similar dual chips •
- Robust design allows for most severe soldering processes •
  - Complies with or exceeds IEEE Requirements •


### Electrical Parameters @ 25°C

Inductance ( $\mu$ H Min.)	Return Loss (dB Min.)	Common Mode Rejection (dB Min.)		Isolation (Vrms)
		@ 1 - 100 MHz	@ 1 - 100 MHz	
@ 100 KHz, 0.1 Vrms	5 MHz - 10 MHz @ 100 $\Omega$	Xmit	Rcv	
100	-15	-25	-20	1500

### Schematic

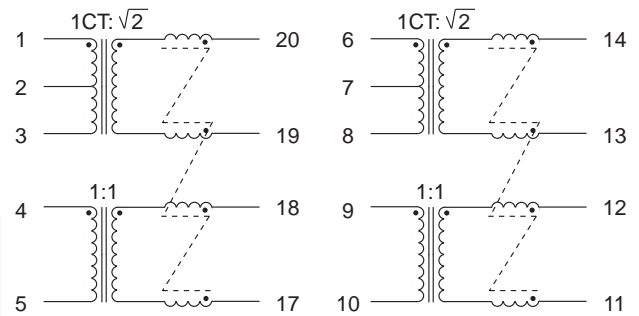

### Package

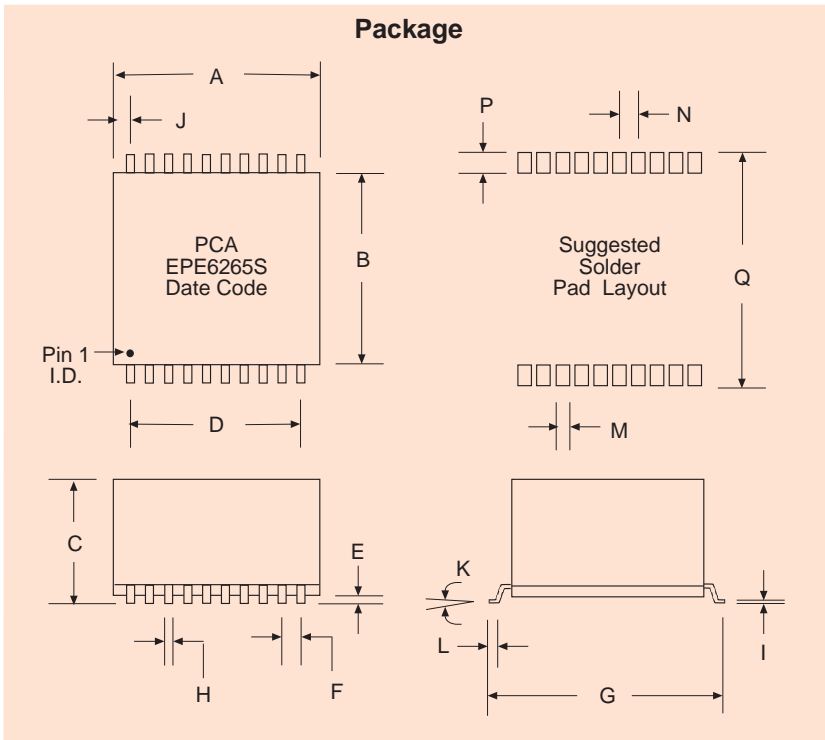

### Dimensions

Dim.	(Inches)			(Millimeters)		
	Min.	Max.	Nom.	Min.	Max.	Nom.
A	.590	.610		25.15	25.40	
B	.490	.510		6.60	7.11	
C	.310	.330		7.87	8.38	
D	.450	Typ.		11.43	Typ.	
E	.010	.020		.254	.508	
F	.050	Typ.		1.27	Typ.	
G	.630	.650		10.16	10.67	
H	.016	.022		.406	.559	
I	.008	.012		.203	.305	
J	.075	Typ.		1.90	Typ.	
K	0°	8°		0°	8°	
L	.040	.060		1.02	1.52	
M			.030			.762
N			.050			1.27
P			.090			2.29
Q			.680			17.27