


- 1500 Vrms Isolation
- Transmit and Receive in one package
- Complies with or exceeds IEEE 802.3, 10Base-T Standards


Electrical Parameters @ 25° C

OCL (μ H Min.)		Interwinding Capacitance (pF Max.)	Leakage Inductance (μ H Max.)	PrimaryDCR (Ω Max.)
200	110	15	0.4	1.0
Pins 1-3	Pins 6-8	Xmit & Rcv	Pins 1-3 & 6-8	Pins 1-3 & 6-8

Schematic

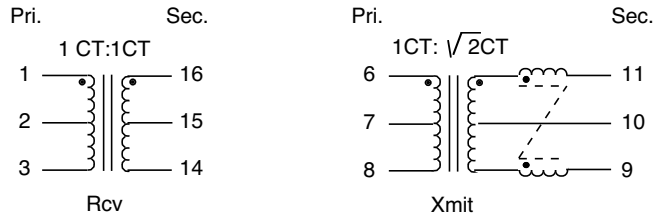

Package

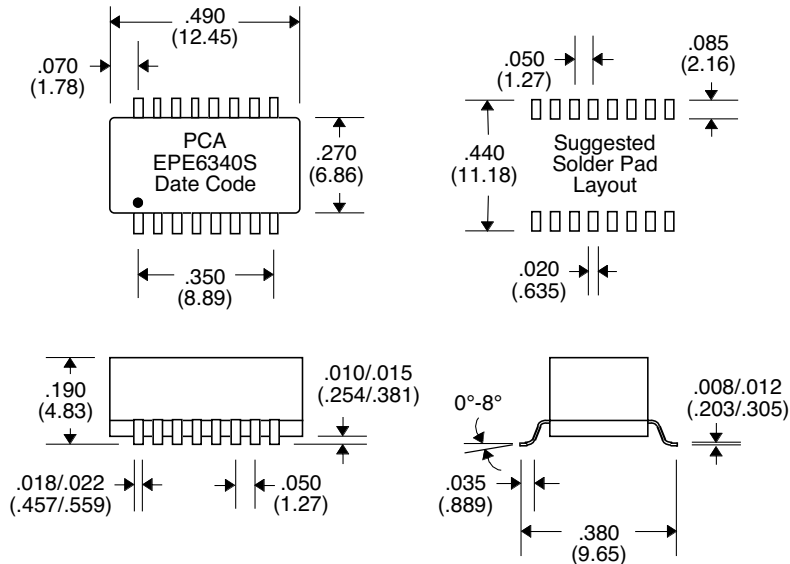

Unless Otherwise Specified Dimensions are in Inches /mm $\pm .010 / .25$