

## NX8045GB

For OA / AV

### ■ Features

A de facto standard small surface-mount type crystal unit, ideal for OA (office automation) and AV (audiovisual) applications.

Compatible with low frequencies starting from 4MHz. (8.0 × 4.5 × 1.8mm typ.)

- Excellent electrical performance, ideal for OA and AV applications.
- Excellent environmental performance, including heat and shock resistance.
- Lead-free. Meets the requirements for re-flow profiling using lead-free solder.



RoHS Compliant  
Directive 2002/95/EC

### ■ Specifications

Item	Model	NX8045GB
Frequency Range		4 to 48MHz
Overtone Order		Fundamental
Frequency Tolerance (25 ±3°C)		±20 × 10 <sup>-6</sup>
Temperature Characteristics (with reference to +25°C)		±30 × 10 <sup>-6</sup>
Operating Temperature Range		-10 to +70°C
Equivalent Series Resistance		Refer to *1
Drive Level		50μW(Max:500μW)
Load Capacitance		8pF

The above specifications are standard for this NDK product.

Custom-made specifications such as load capacitance and temperature characteristics are also available.

Please contact NDK sales with your enquiries.


### ■ How to Specify an Order

When ordering our products, specify them with an "Ordering Code" that consists of the following :

-  M - 
Example NX8045GB-13.560M-STD-CSF-4

If you have any queries concerning our standard frequencies and numbers for specifying orders, please contact our sales representatives or visit our homepage (<http://www.ndk.com/>).

### ■ Dimensions

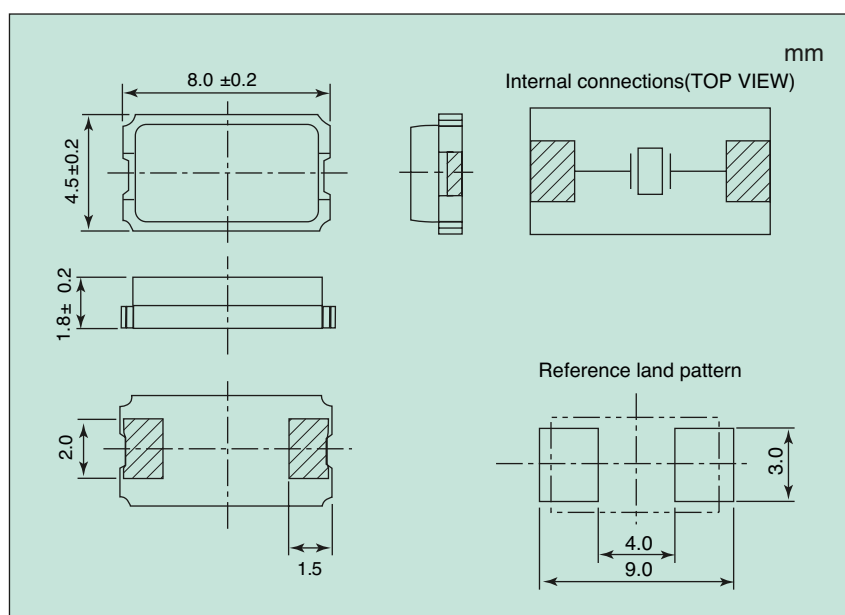

\*1 Equivalent Series Resistance

Frequency (MHz) (Range)	Equivalent Series Resistance max.[Ω]
4 to 5	300
5 to 8	250
8 to 9.5	200
9.5 to 10	120
10 to 12	100
12 to 13	80
13 to 48	50